

### FEATURES

- ✧ 100 Watts peak pulse power per line ( $t_p=8/20\mu s$ )
- ✧ Protect for two I/O lines with bi-directional
- ✧ Low clamping voltage
- ✧ Working voltages: 12V
- ✧ Low leakage current
- ✧ ROHS compliant
- ✧ Compliant to Halogen-free
- ✧ Suffix "-Q1" for AEC-Q101

### MAIN APPLICATIONS

- ✧ RS-232, RS-422 & RS-485
- ✧ Servers, notebook, and desktop
- ✧ Cellular handsets and accessories
- ✧ Control & monitoring systems
- ✧ Portable electronics
- ✧ Wireless bus protection
- ✧ Set-top box



### PROTECTION SOLUTION TO MEET

- ✧ IEC61000-4-2 (ESD)  $\pm 30kV$  (air),  $\pm 30kV$  (contact)
- ✧ IEC61000-4-4 (EFT) 40A (5/50ns)
- ✧ IEC61000-4-5 (Lightning) 4A (8/20us)

### MECHANICAL CHARACTERISTICS

- ✧ SOT-23 package
- ✧ Molding compound flammability rating : UL 94V-0
- ✧ Quantity per reel : 3,000pcs
- ✧ Lead finish : lead free
- ✧ Marking code: AB2

### Package outline

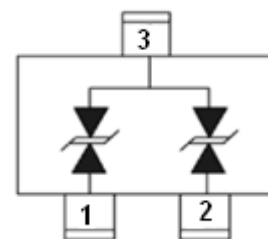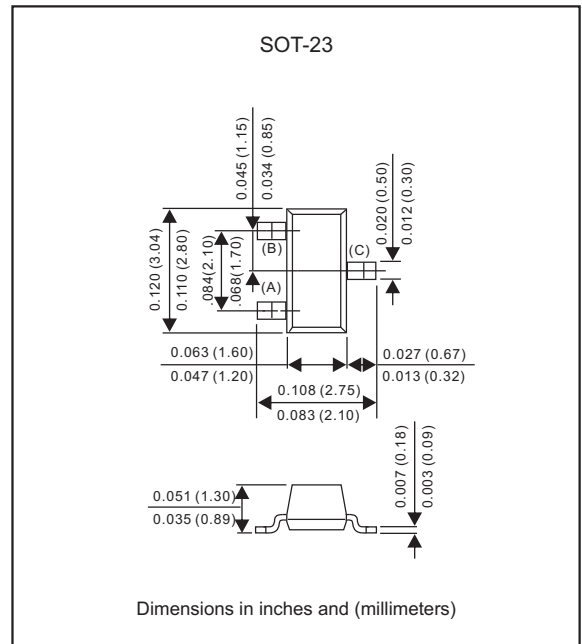

PIN Configuration

### ABSOLUTE MAXIMUM RATINGS ( $T_A=25^{\circ}\text{C}$ , RH=45%-75%, unless otherwise noted)

Parameter	Symbol	Value	Unit
Peak pulse power dissipation on 8/20 $\mu\text{s}$ waveform	$P_{PP}$	100	W
ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact)	$V_{ESD}$	+/-30 +/-30	kV
Operating junction temperature range	$T_J$	-55 to +125	$^{\circ}\text{C}$
Storage temperature range	$T_{STG}$	-55 to +150	$^{\circ}\text{C}$

### ELECTRICAL CHARACTERISTICS ( $T_A=25^{\circ}\text{C}$ )

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Reverse working voltage	$V_{RWM}$				12	V
Reverse breakdown voltage	$V_{BR}$	$I_T = 1\text{mA}$	13.3			V
Reverse leakage current	$I_R$	$V_{RWM} = 12\text{V}$			1	$\mu\text{A}$
Clamping voltage	$V_C$	$I_{PP}^{(1)} = 1\text{A}$ , $t_p = 8/20\mu\text{s}$		19		V
		$I_{PP}^{(1)} = 4\text{A}$ , $t_p = 8/20\mu\text{s}$			25	V
Junction capacitance	$C_J^{(2)}$	$V_{RWM} = 0\text{V}$ , $f = 1\text{MHz}$		5		pF

② Surge waveform: 8/20 $\mu\text{s}$

②  $C_J$  measured @ $V_{RWM}=0\text{V}$ , 1MHz (pin 1 to pin3, pin 2 to pin3)

### RATINGS AND V-I CHARACTERISTICS CURVES ( $T_A=25^{\circ}\text{C}$ , unless otherwise noted)

FIG.1 Power Derating Curve

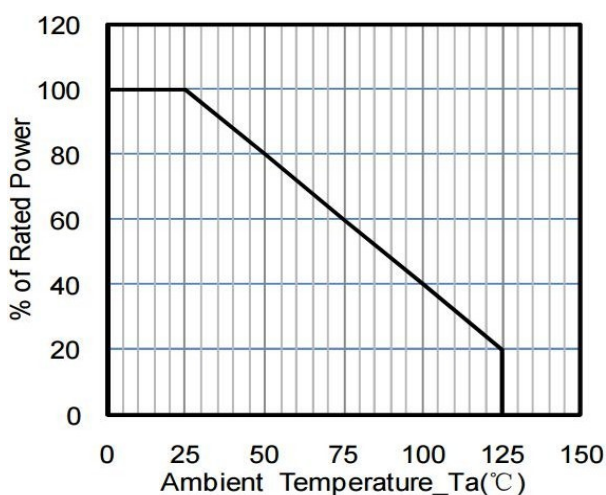


FIG.2 Pulse Waveform (8/20 $\mu\text{s}$ )

