


Features

- Axial lead type devices for through hole design.
- 1500W peak pulse power capability with a 10/1000us waveform, repetition rate (duty cycle): 0.05%.
- Excellent clamping capability.
- Low incremental surge resistance.
- Fast response time from 0V to VBR, typically less than 1pS for uni-directional & 5 nS for bi-directional types.
- Ultra high-speed switching.
- Glass passivated chip junction.
- Lead-free parts meet environmental standards of MIL-STD-19500 /228
- Suffix "-H" indicates Halogen free parts, ex. 1.5KE6.8A-H

Mechanical data

- Epoxy : UL94-V0 rated flame retardant
- Case : Molded plastic, DO-201AE
- Lead : Axial leads, solderable per MIL-STD-202, Method 208 guaranteed
- Polarity: Color band denotes cathode end
- Mounting Position : Any

Package outline

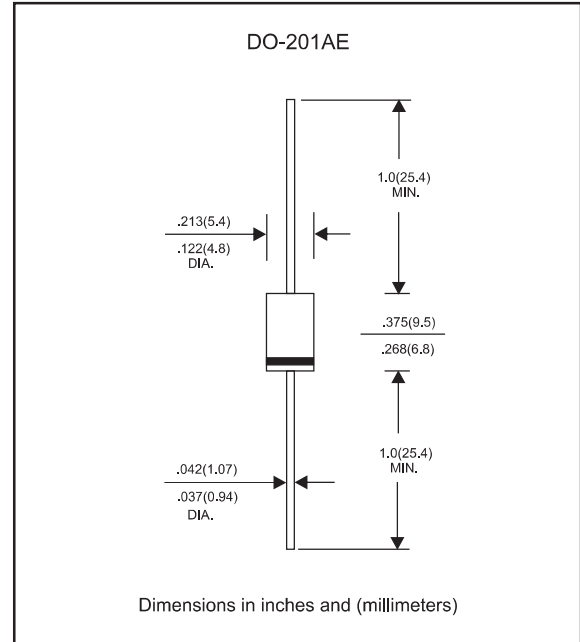

Maximum ratings (AT $T_A=25^\circ\text{C}$ unless otherwise noted)

PARAMETER	CONDITIONS	Symbol	1.5KE series	UNIT
Peak power dissipation	with a 10/1000us waveform, note 1 & fig.1	P_{PPM}	1500	W
Peak pulse current	with a 10/1000us waveform, note 1 & fig.1	I_{PPM}	See Table 1	A
Steady state power dissipation	at $T_L=75^\circ\text{C}$, lead length 0.375"(9.5mm)	$P_{M(AV)}$	6.5	W
Peak forward surge current	8.3ms single half sine-wave superimposed on rated load(JEDEC Mthod), note 2	I_{FSM}	200	A
Maximum instantaneous forward voltage	at 100A for Uni-Directional types only, note 3	V_F	3.5/5.0	V
Operating temperature		T_J	-55~+150	$^\circ\text{C}$
Storage temperature		T_{STG}	-65~+175	$^\circ\text{C}$

Note 1. Non-repetitive current pulse, per Fig. 3 and derated above $T_A=25^\circ\text{C}$ per Fig. 2

2. Measured on 8.3 mS single half sine-wave or equivalent square wave, duty cycle=4 pulses per minute maximum

3. $V_F=3.5\text{V}$ max. for devices of $V_{BR}<200\text{V}$, and $V_F=5.0\text{V}$ max. for devices of $V_{BR}>201\text{V}$

Electrical characteristics (at $T_A=25^{\circ}\text{C}$ unless otherwise noted)

Table 1

Part No.	Absolute Maximum Rating($T_A = 25^{\circ}\text{C}$)					Electricity Characteristics($T_A = 25^{\circ}\text{C}$)		
	V_{RWM}	$V_{BR\ Min}$	$V_{BR\ Max}$	I_T	I_{FSM}	Max. $V_C@I_{PPM}$		Max. $I_R@V_{RWM}$
	Volts	Volts	Volts	mA	(A)@8.3ms	Volts	$I_{PPM}(A)$	
1.5KE6.8(C)A	5.80	6.45	7.14	10	200	10.8	144.8	300.0
1.5KE7.5(C)A	6.40	7.13	7.88	10	200	11.3	134.5	150.0
1.5KE8.2(C)A	7.02	7.79	8.61	10	200	12.1	125.6	100.0
1.5KE9.1(C)A	7.78	8.65	9.55	1.0	200	13.4	113.4	50.0
1.5KE10(C)A	8.55	9.50	10.5	1.0	200	14.5	104.8	20.0
1.5KE11(C)A	9.40	10.5	11.6	1.0	200	15.6	97.4	5.0
1.5KE12(C)A	10.2	11.4	12.6	1.0	200	16.7	91.0	2.0
1.5KE13(C)A	11.1	12.4	13.7	1.0	200	18.2	83.5	1.0
1.5KE15(C)A	12.8	14.3	15.8	1.0	200	21.2	71.7	1.0
1.5KE16(C)A	13.6	15.2	16.8	1.0	200	22.5	67.6	1.0
1.5KE18(C)A	15.3	17.1	18.9	1.0	200	25.5	60.3	1.0
1.5KE20(C)A	17.1	19.0	21.0	1.0	200	27.7	54.9	1.0
1.5KE22(C)A	18.8	20.9	23.1	1.0	200	30.6	49.7	1.0
1.5KE24(C)A	20.5	22.8	25.2	1.0	200	33.2	45.8	1.0
1.5KE27(C)A	23.1	25.7	28.4	1.0	200	37.5	40.5	1.0
1.5KE30(C)A	25.6	28.5	31.5	1.0	200	41.4	36.7	1.0
1.5KE33(C)A	28.2	31.4	34.7	1.0	200	45.7	33.3	1.0
1.5KE36(C)A	30.8	34.2	37.8	1.0	200	49.9	30.5	1.0
1.5KE39(C)A	33.3	37.1	41.0	1.0	200	53.9	28.2	1.0
1.5KE43(C)A	36.8	40.9	45.2	1.0	200	59.3	25.6	1.0
1.5KE47(C)A	40.2	44.7	49.4	1.0	200	64.8	23.5	1.0
1.5KE51(C)A	43.6	48.5	53.6	1.0	200	70.1	21.7	1.0
1.5KE56(C)A	47.8	53.2	58.8	1.0	200	77.0	19.7	1.0
1.5KE62(C)A	53.0	58.9	65.1	1.0	200	85.0	17.9	1.0
1.5KE68(C)A	58.1	61.6	71.4	1.0	200	92.0	16.5	1.0
1.5KE75(C)A	64.1	71.3	78.8	1.0	200	103.0	14.8	1.0
1.5KE82(C)A	70.1	77.9	86.1	1.0	200	113.0	13.5	1.0
1.5KE91(C)A	77.8	86.5	95.5	1.0	200	125.0	12.2	1.0
1.5KE100(C)A	85.5	95.0	105.0	1.0	200	137.0	11.1	1.0
1.5KE110(C)A	94.0	105.0	116.0	1.0	200	152.0	10.0	1.0
1.5KE120(C)A	102.0	114.0	126.0	1.0	200	165.0	9.2	1.0
1.5KE130(C)A	111.0	124.0	137.0	1.0	200	179.0	8.5	1.0
1.5KE150(C)A	128.0	143.0	158.0	1.0	200	207.0	7.3	1.0
1.5KE160(C)A	136.0	152.0	168.0	1.0	200	219.0	6.9	1.0
1.5KE170(C)A	145.0	162.0	179.0	1.0	200	234.0	6.5	1.0
1.5KE180(C)A	154.0	171.0	189.0	1.0	200	246.0	6.2	1.0
1.5KE200(C)A	171.0	190.0	210.0	1.0	200	274.0	5.5	1.0
1.5KE220(C)A	185.0	209.0	231.0	1.0	200	328.0	4.6	1.0
1.5KE250(C)A	214.0	237.0	263.0	1.0	200	344.0	4.4	1.0
1.5KE300(C)A	256.0	285.0	315.0	1.0	200	414.0	3.7	1.0
1.5KE350(C)A	300.0	332.0	368.0	1.0	200	482.0	3.2	1.0
1.5KE400(C)A	342.0	380.0	420.0	1.0	200	548.0	2.8	1.0
1.5KE440(C)A	376.0	418.0	462.0	1.0	200	600.0	2.5	1.0

- Note 1. V_{BR} measured after I_T applied for 300iS, I_T =square wave pulse or equivalent
- 2. Surge current waveform per Fig. 3 and derated per Fig. 2
- 3. For bi-directional types having V_{anorm} of 10 volts and less, the I_R limit is doubled
- 4. Suffix 'C' denotes bi-directional devices. Suffix 'A' denotes 5% tolerance devices, no suffix denotes 10% tolerance devices.
- 5. All terms and symbols are consistent with ANS/IEEE C62.35



Document ID	Issued Date	Revised Date	Revision	Page
AS-3080013	2003/03/08	2023/10/12	F	4

Rating and characteristic curves (1.5KE SERIES)

FIG.1 - PEAK PULSE POWER RATING CURVE

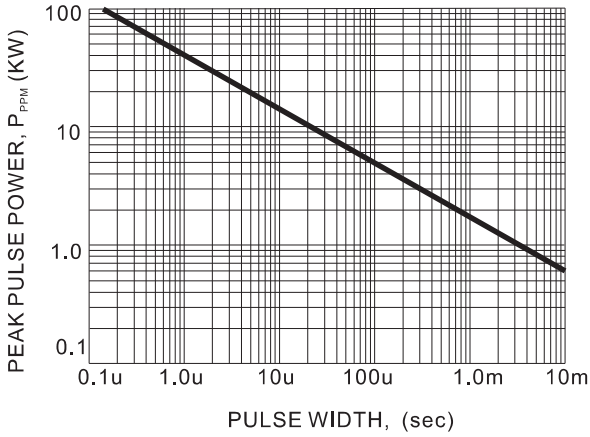


FIG.2 - PULSE DERATING CURVE

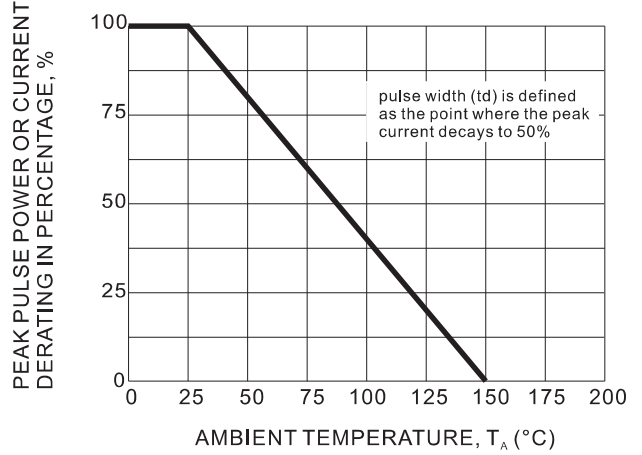


FIG.3 - PULSE WAVEFORM

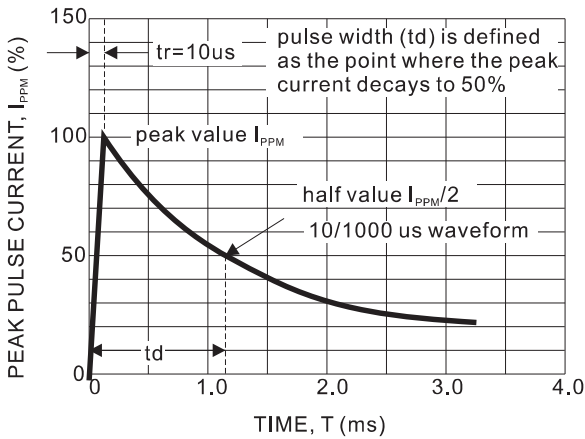


FIG.4 - TYPICAL JUNCTION CAPACITANCE

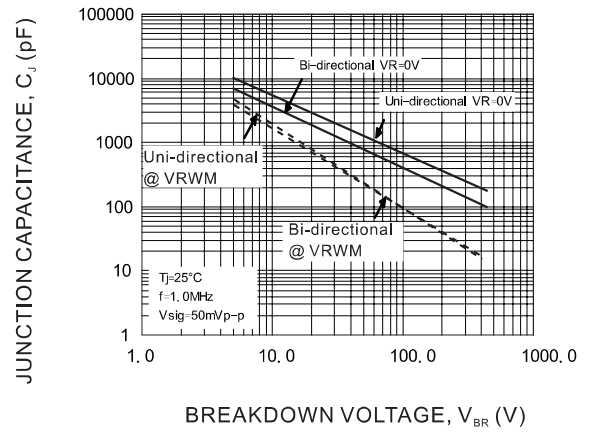


FIG.5 - STEADY STATE POWER DERATING CURVE


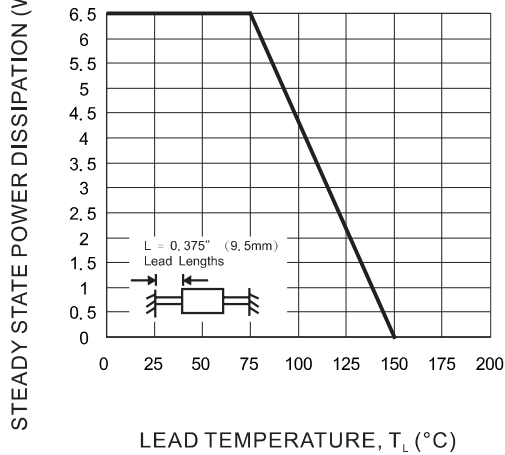




FIG.6 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

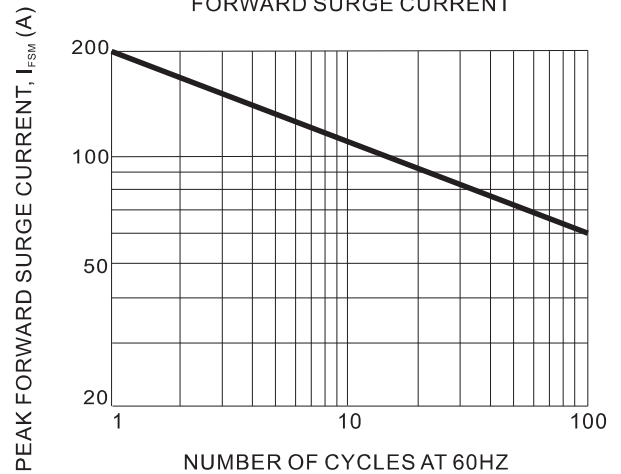

Pinning information

Pin	Simplified outline	Symbol
Uni-Directional Pin1 cathode Pin2 anode		
Bi-Directional	