

Product Summary

$V_{(BR)DSS}$	$R_{DS(on)TYP}$	$I_D@25^{\circ}C$
1200V	160m Ω @20V	22A
	165m Ω @18V	


Feature

- Wide bandgap SiC MOSFET technology
- Low On-Resistance with High Blocking Voltage
- Low capacitances with High-Speed switching
- Low reverse recovery (Qrr)

Application


- Switch mode power supplies
- Renewable energy
- On board charger
- High voltage DC/DC converters

Package

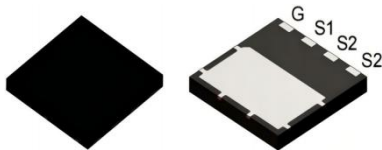


DFN8*8

Marking



Circuit diagram



Absolute maximum ratings ($T_c=25^{\circ}C$ unless otherwise noted)

Parameter	Symbol	Test Condition	Value	Unit
Drain-Source Voltage	V_{DSmax}	$V_{GS}=0V, I_D=100\mu A$	1200	V
Gate-Source Voltage	V_{GSmax}	AC ($f > 1\text{ Hz}$)	-10/+25	V
Gate-Source Voltage	V_{GSOP}	Static	-4/+18	V
Continuous Drain Current	I_D	$V_{GS}=18V$	22	A
	I_D	$V_{GS}=18V, T_c=100^{\circ}C$	15	
Pulsed Drain Current	$I_{D,pulse}$	Pulse with t_p limited by T_{jmax} at 1ms	34	A
		Pulse with t_p limited by T_{jmax} at 100 μs	72	
Power Dissipation	P_D	$T_J=175^{\circ}C$	128	W
Thermal Resistance (Typ)	$R_{\theta JC}$	Junction to Case	1.17	$^{\circ}C/W$
Operating Junction Temperature	T_J		-55~ +175	$^{\circ}C$
Storage Temperature	T_{STG}		-55~ +175	$^{\circ}C$

Electrical characteristics (T_J=25°C, unless otherwise noted)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Static Characteristics						
Drain-source breakdown voltage	V _{(BR)DSS}	V _{GS} =0V, I _D =100μA	1200			V
Zero gate voltage drain current	I _{DSS}	V _{DS} =1200V, V _{GS} =0V			50	μA
Gate-Source leakage current	I _{GSS}	V _{DS} =0V, V _{GS} =18V			250	nA
Gate threshold voltage	V _{GS(th)}	V _{DS} =V _{GS} , I _D =2.5mA		3		V
		V _{DS} =V _{GS} , I _D =2.5mA, T _J =175°C		2		
Drain-source on-resistance	R _{DS(on)}	V _{GS} =18V, I _D =10A		165	240	mΩ
		V _{GS} =20V, I _D =10A		160		
		V _{GS} =18V, I _D =10A, T _J =175°C		330		
		V _{GS} =20V, I _D =10A, T _J =175°C		320		
Transconductance	g _{fs}	V _{GS} =18V, I _D =10A		9.7		S
		V _{GS} =18V, I _D =10A, T _J =175°C		6		
Dynamic characteristics						
Input Capacitance	C _{iss}	V _{DS} =1000V, V _{GS} =0V V _{AC} =25mV, f =1MHz		730		pF
Output Capacitance	C _{oss}			24		
Reverse Transfer Capacitance	C _{rss}			1		
Total Gate Charge	Q _g	V _{DS} =800V, V _{GS} =-4V/18V I _D =10A		41		nC
Gate-Source Charge	Q _{gs}			8.4		
Gate-Drain Charge	Q _{gd}			15		
Internal Gate Resistance	R _{G(int)}	V _{AC} =25mV, f =1MHz		3		Ω
Source-Drain Diode characteristics						
Diode Forward Current	I _S	V _{GS} =-4V, T _C =25°C		26		A
Diode Forward voltage	V _{SD}	V _{GS} =-4V, I _{SD} =3A		3.6		V
		V _{GS} =-4V, I _{SD} =3A, T _J =175°C		3.1		

Typical Characteristics

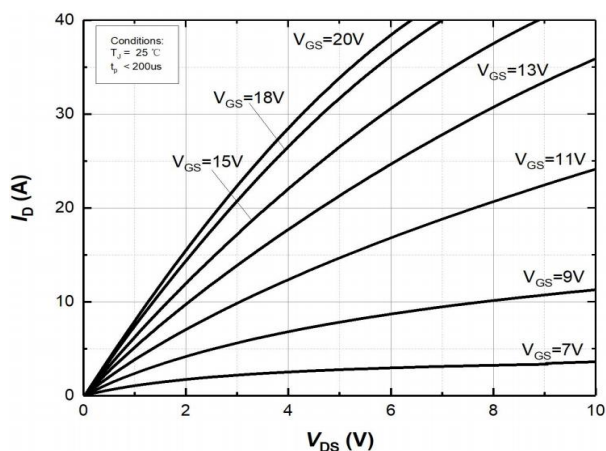


Figure 1. Output characteristics at $T_j=25^\circ\text{C}$

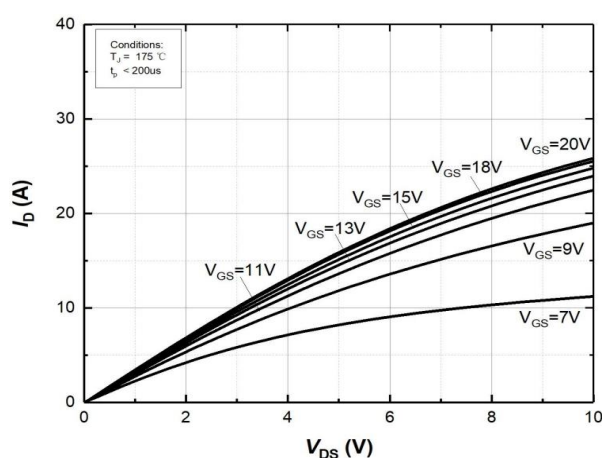


Figure 2. Output characteristics at $T_j=175^\circ\text{C}$

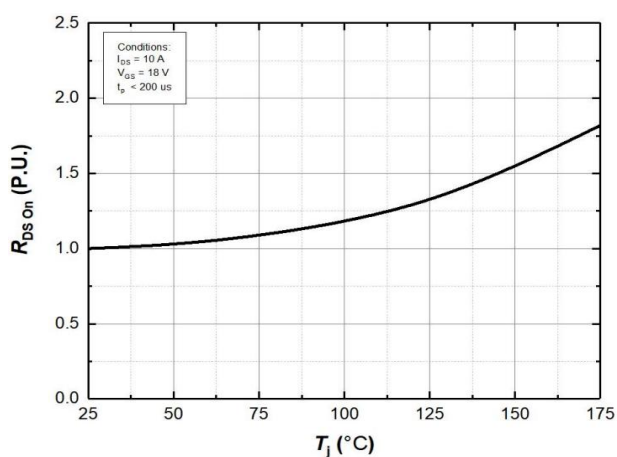


Figure 3. Normalized On-Resistance vs. Temperature

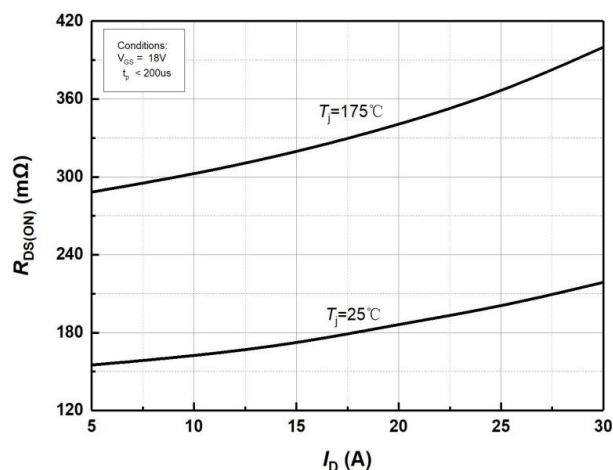


Figure 4. On-Resistance vs. Drain current for Various Temperature

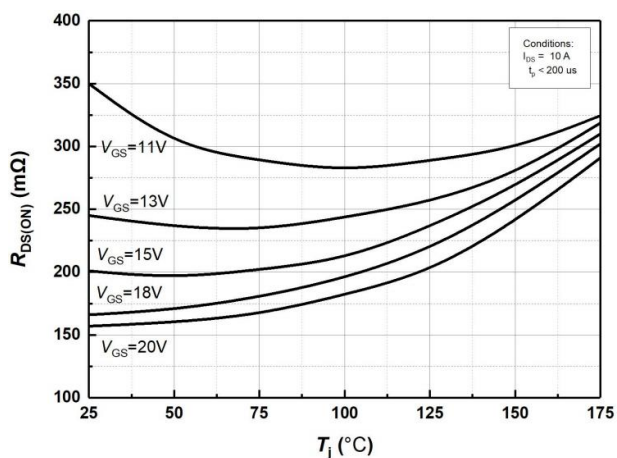


Figure 5. On-Resistance vs. Temperature for Various Gate Voltage

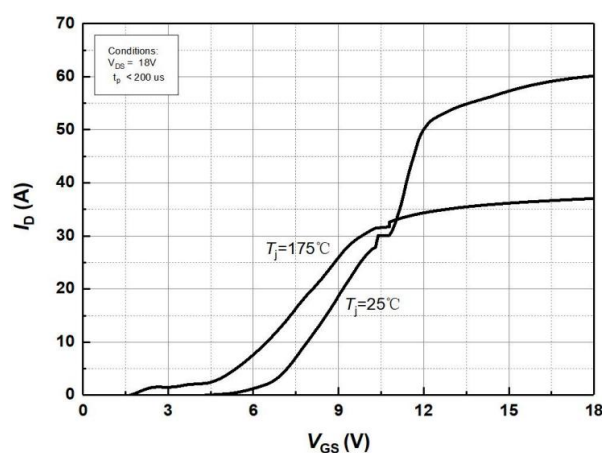


Figure 6. Transfer Characteristics for Various Junction Temperatures

Typical Characteristics

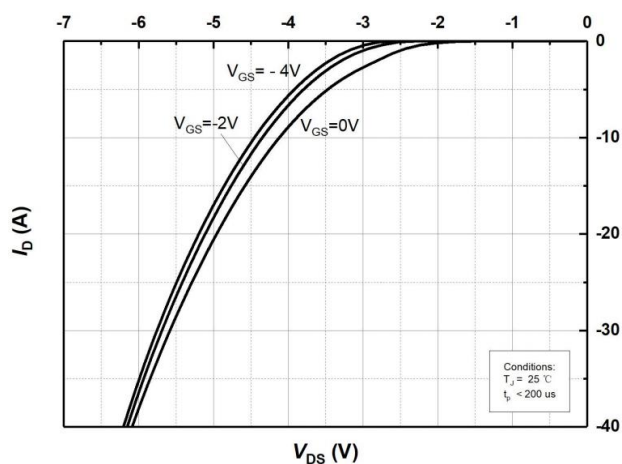


Figure 7. Body Diode Characteristics at $T_j=25^{\circ}\text{C}$

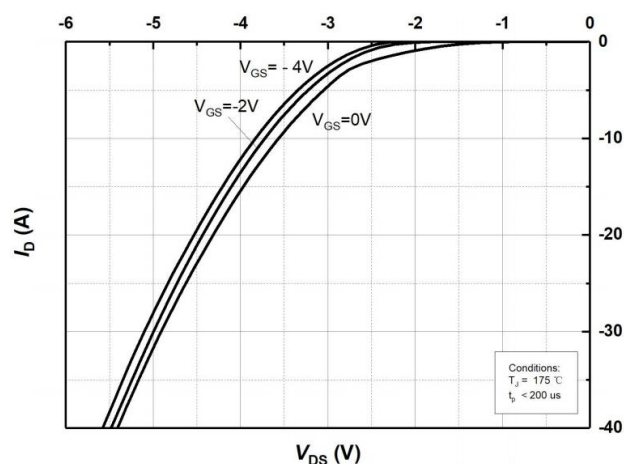


Figure 8. Body Diode Characteristics at $T_j=175^{\circ}\text{C}$

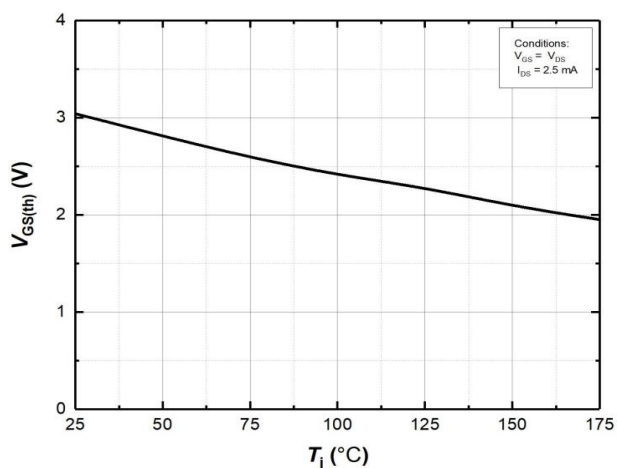


Figure 9. Threshold Voltage vs. Temperature

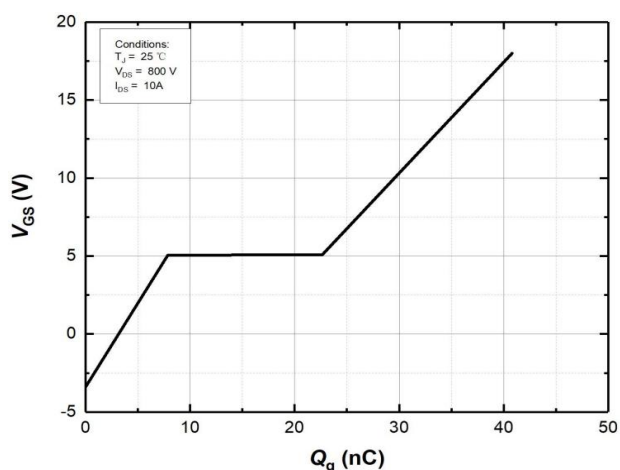


Figure 10 Gate Charge Characteristics

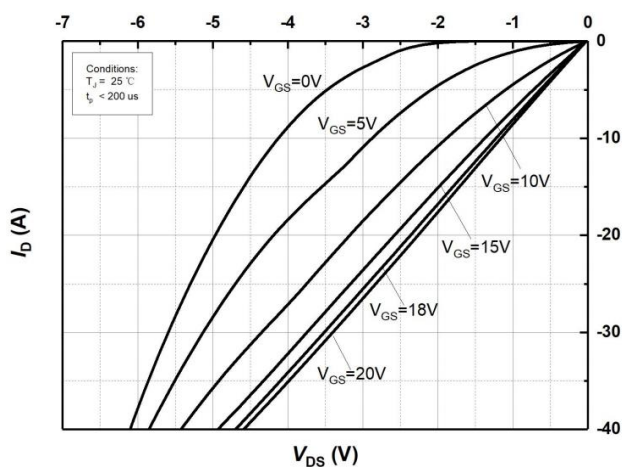


Figure 11. 3rd Quadrant Characteristic at $T_j=25^{\circ}\text{C}$

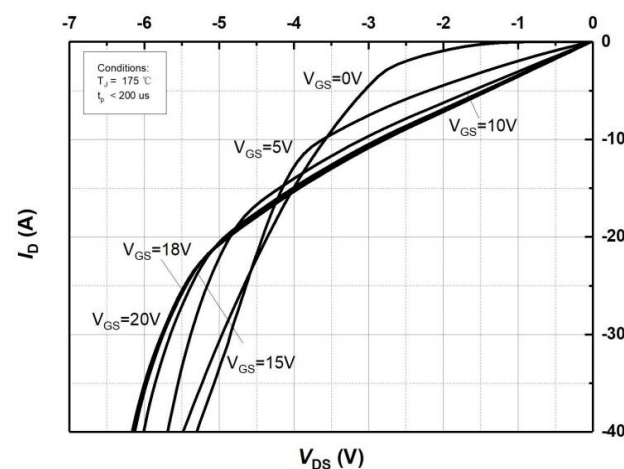


Figure 12. 3rd Quadrant Characteristic at $T_j=175^{\circ}\text{C}$

Typical Characteristics

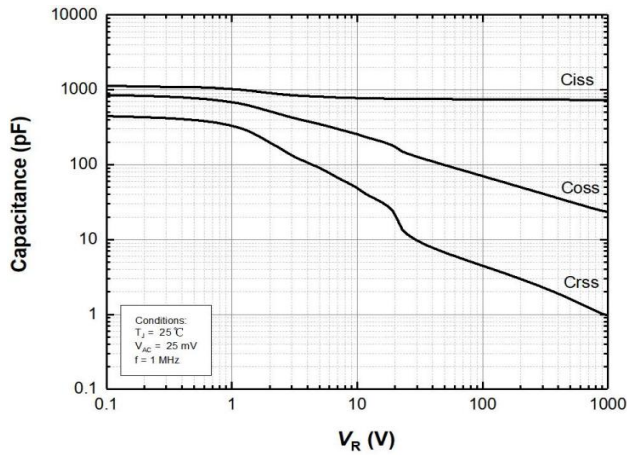


Figure 13. Capacitances vs. Drain-Source Voltage (0 – 1000V)

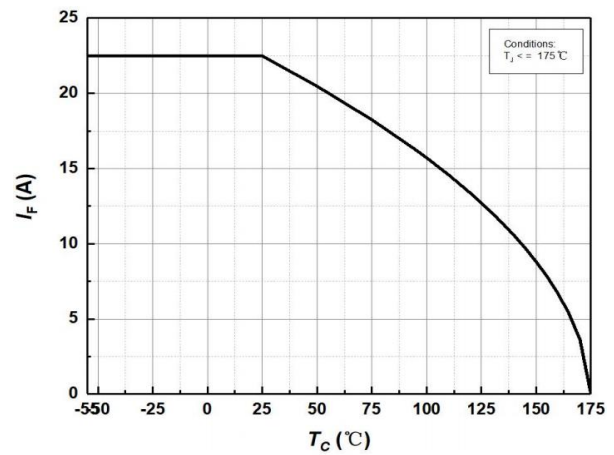


Figure 14. Continuous Drain Current Derating vs Case Temperature

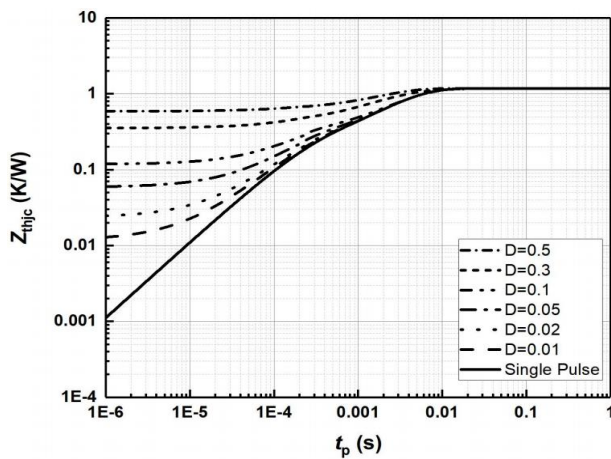


Figure 15. Transient Thermal Impedance (Junction – Case)

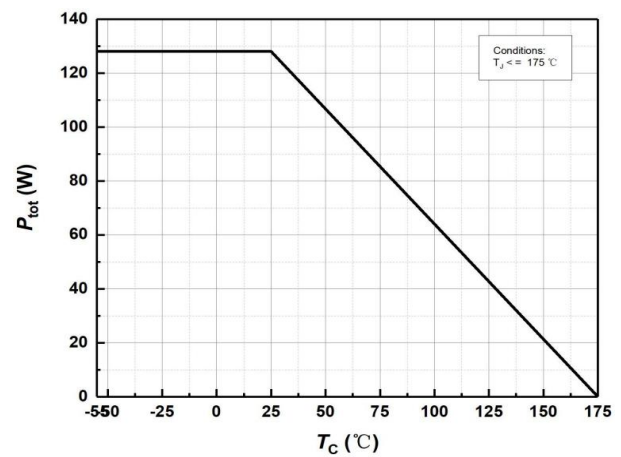


Figure 16. Maximum Power Dissipation Derating vs. Case Temperature

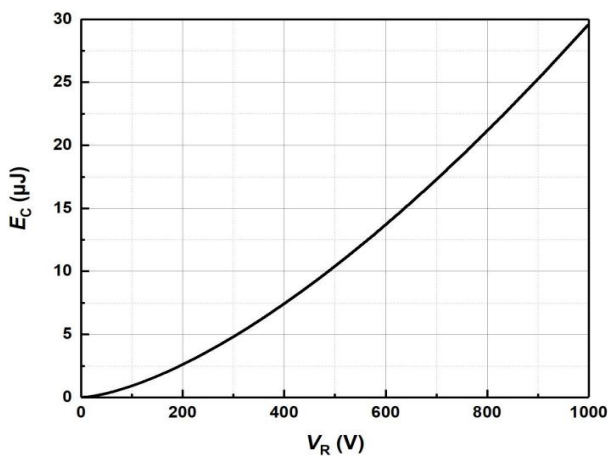


Figure 17. Output Capacitor Stored Energy


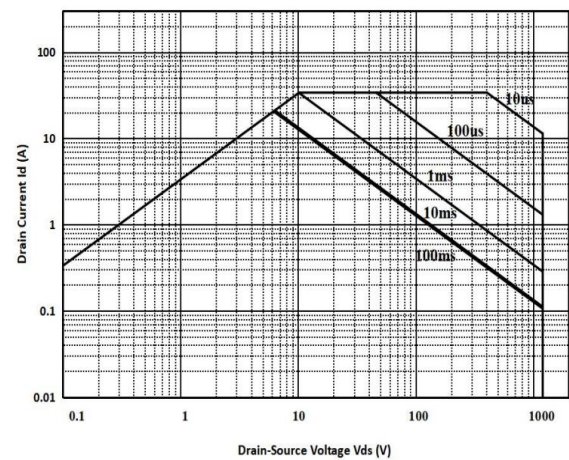


Figure 18. Safe Operating Area

DFN8*8 Package Information

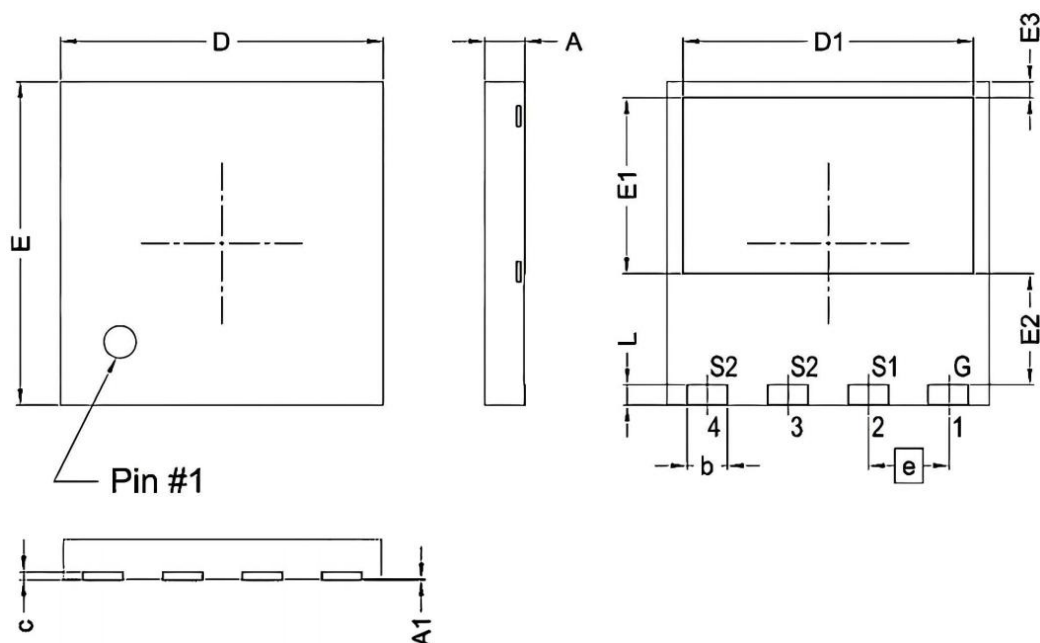

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.900	1.100	0.035	0.043
A1	0.000	0.050	0.000	0.002
b	0.900	1.100	0.035	0.043
c	0.100	0.300	0.004	0.012
D	7.900	8.100	0.311	0.319
D1	7.100	7.300	0.280	0.287
E	7.900	8.100	0.311	0.319
E1	4.250	4.450	0.167	0.175
E2	2.650	2.850	0.104	0.112
E3	0.300	0.500	0.012	0.020
e	2.000 BSC.		0.079 BSC.	
L	0.400	0.600	0.016	0.024