

### Product Summary

$V_{(BR)DSS}$	$R_{DS(on)MAX}$	$I_D$
80V	6mΩ@10V	120A

### Feature

- High density cell design for ultra low Rdson
- Fully characterized avalanche voltage and current
- Good stability and uniformity with high  $E_{AS}$
- Excellent package for good heat dissipation
- Suffix "-Q1" for AEC-Q101

### Application


- Automotive applications
- Hard switched and high frequency circuits
- Uninterruptible power supply

### Package




TO-263AB

### Circuit diagram

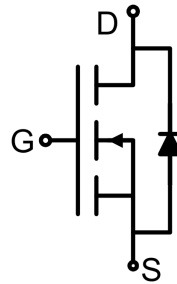

### Marking

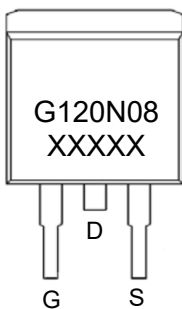

### Absolute maximum ratings (Ta=25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V <sub>DS</sub>	80	V
Gate-Source Voltage	V <sub>GS</sub>	±20	V
Continuous Drain Current	I <sub>D</sub>	120	A
Pulsed Drain Current	I <sub>DM</sub>	450	A
Power Dissipation	P <sub>D</sub>	220	W
Thermal Resistance, Junction-to-Case	R <sub>θJC</sub>	0.68	°C/W
Single pulse avalanche energy	E <sub>AS</sub>	1400	mJ
Junction Temperature	T <sub>J</sub>	150	°C
Storage Temperature	T <sub>STG</sub>	-55 ~ +150	°C

### Electrical characteristics (T<sub>A</sub>=25 °C, unless otherwise noted)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
<b>Static Characteristics</b>						
Drain-source breakdown voltage	V <sub>(BR)DSS</sub>	V <sub>GS</sub> = 0V, I <sub>D</sub> = 250μA	80			V
Zero gate voltage drain current	I <sub>DSS</sub>	V <sub>DS</sub> = 80V, V <sub>GS</sub> = 0V			1	μA
Gate-body leakage current	I <sub>GSS</sub>	V <sub>GS</sub> = ±20V, V <sub>DS</sub> = 0V			±100	nA
Gate threshold voltage	V <sub>GS(th)</sub>	V <sub>DS</sub> = V <sub>GS</sub> , I <sub>D</sub> = 250μA	2		4	V
Drain-source on-resistance <sup>1)</sup>	R <sub>DS(on)</sub>	V <sub>GS</sub> = 10V, I <sub>D</sub> = 40A		4.9	6	mΩ
Forward transconductance <sup>1)</sup>	g <sub>FS</sub>	V <sub>DS</sub> = 25V, I <sub>D</sub> = 57A	90			S
<b>Dynamic characteristics<sup>2)</sup></b>						
Input Capacitance	C <sub>iss</sub>	V <sub>DS</sub> = 25V, V <sub>GS</sub> = 0V, f = 1MHz		6500		pF
Output Capacitance	C <sub>oss</sub>			520		
Reverse Transfer Capacitance	C <sub>rss</sub>			460		
Total Gate Charge	Q <sub>g</sub>	V <sub>DS</sub> = 30V, V <sub>GS</sub> = 10V, I <sub>D</sub> = 30A		163		nC
Gate-Source Charge	Q <sub>gs</sub>			31		
Gate-Drain Charge	Q <sub>gd</sub>			64		
Turn-on delay time	t <sub>d(on)</sub>	V <sub>DD</sub> = 30V, V <sub>GS</sub> = 10V, I <sub>D</sub> = 2A, R <sub>L</sub> = 15Ω, R <sub>GEN</sub> = 2.5Ω		26		nS
Turn-on rise time	t <sub>r</sub>			24		
Turn-off delay time	t <sub>d(off)</sub>			91		
Turn-off fall time	t <sub>f</sub>			39		
<b>Source-Drain Diode characteristics</b>						
Diode Forward Current <sup>1)</sup>	I <sub>S</sub>				120	A
Diode Forward voltage	V <sub>DS</sub>	V <sub>GS</sub> = 0V, I <sub>S</sub> = 40A			1.2	V
Reverse Recovery Time	t <sub>rr</sub>	T <sub>J</sub> = 25°C, I <sub>F</sub> = 40A, di/dt = 100A/μs <sup>1)</sup>		42		nS
Reverse Recovery Charge	Q <sub>rr</sub>			66		nC


Notes:

1) Pulse Test: Pulse Width < 300μs, Duty Cycle ≤ 2%.


2) Guaranteed by design, not subject to production testing.

## Test Circuit


### 1) $E_{AS}$ test Circuit

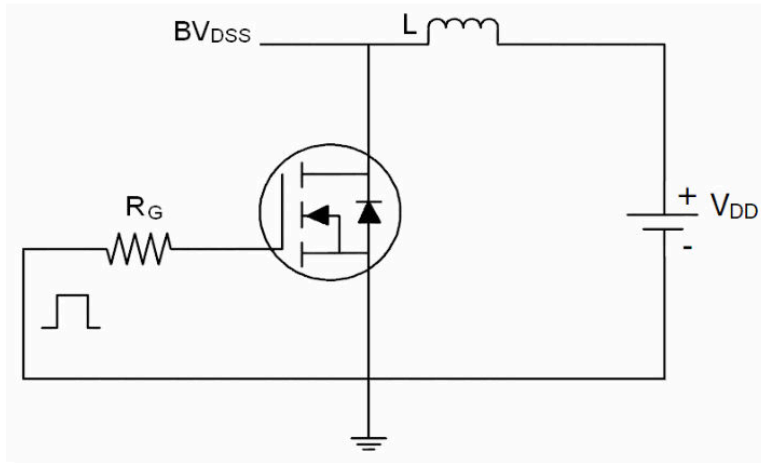


### 2) Gate charge test Circuit

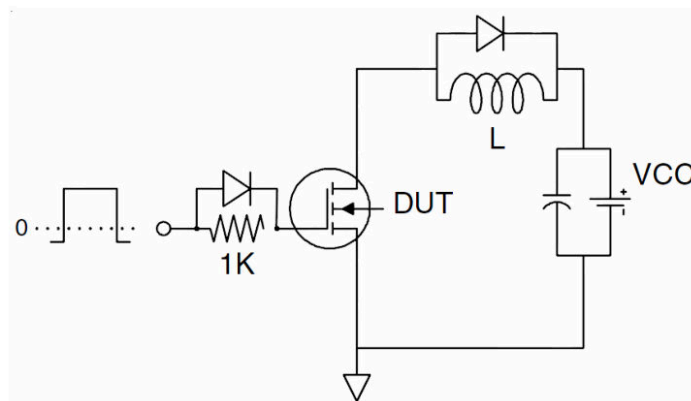


### 3) Switch Time Test Circuit

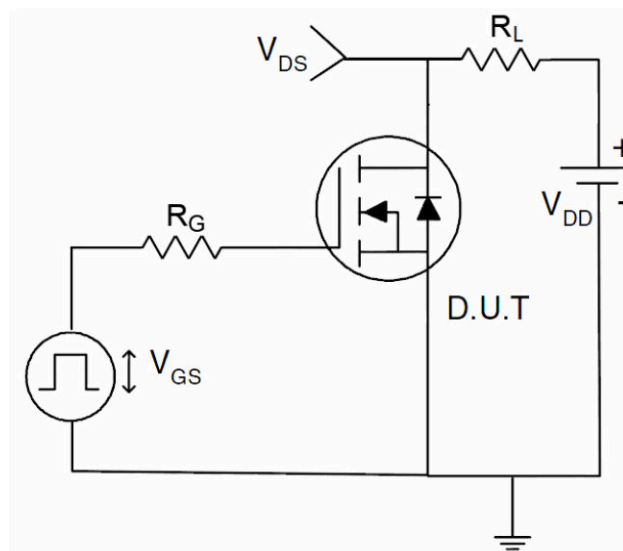


## Typical Characteristics

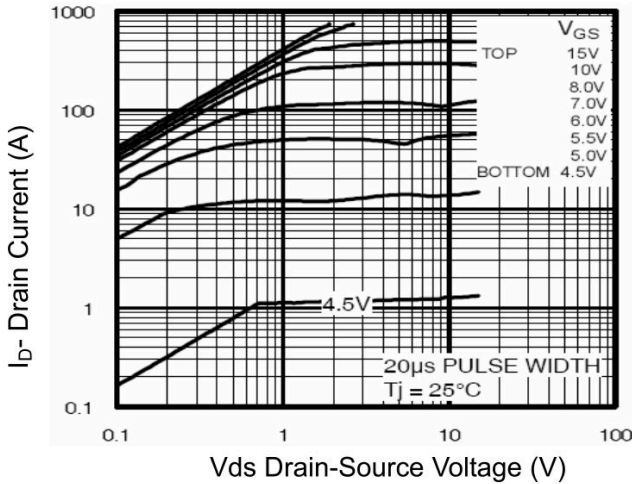


**Figure 1 Output Characteristics**

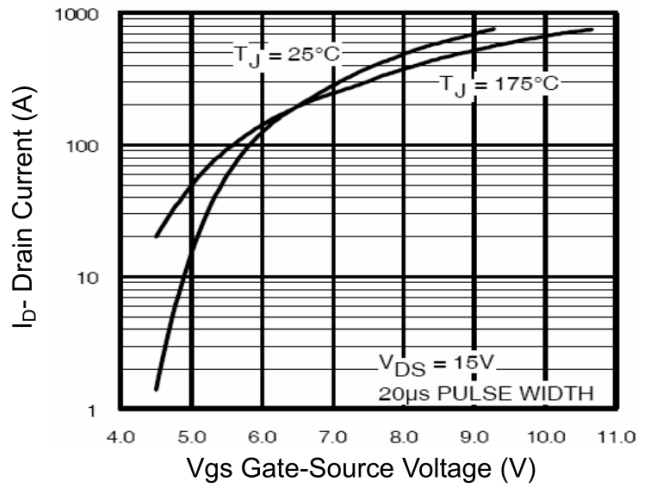


**Figure 2 Transfer Characteristics**

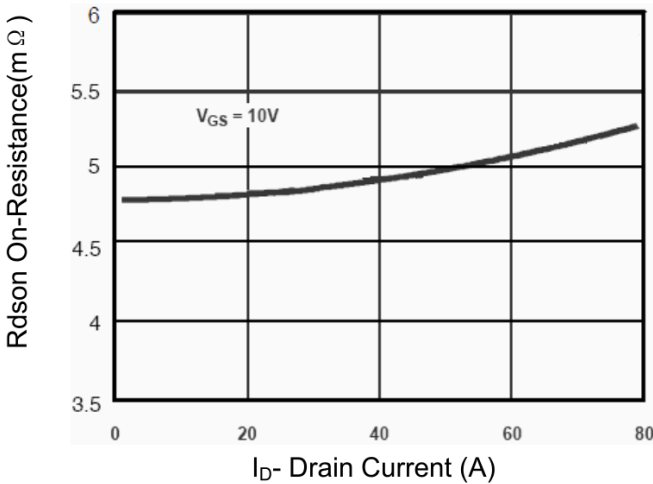


**Figure 3 Rdson- Drain Current**

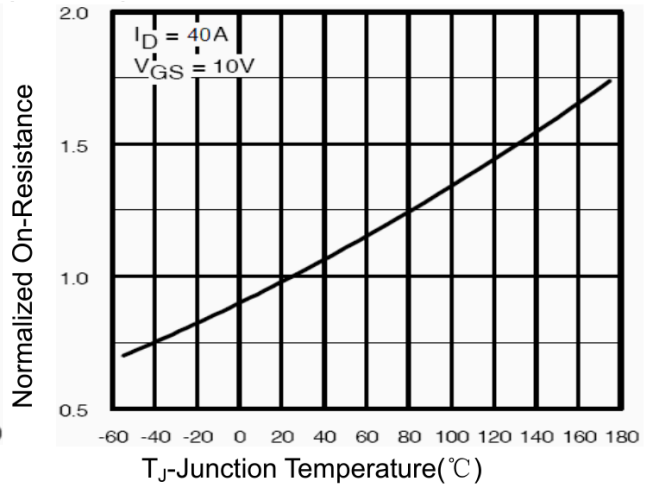

**Figure 4 Rdson-Junction Temperature**

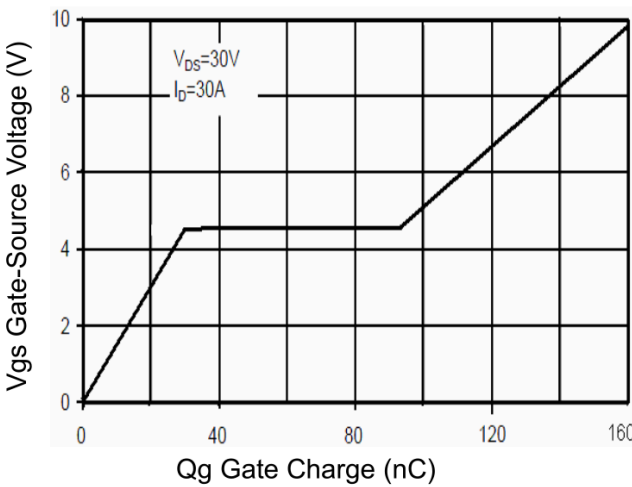


**Figure 5 Gate Charge**

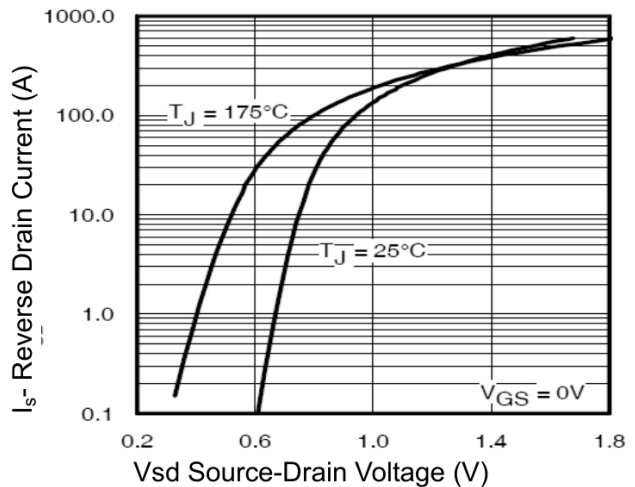


**Figure 6 Source- Drain Diode Forward**


## Typical Characteristics

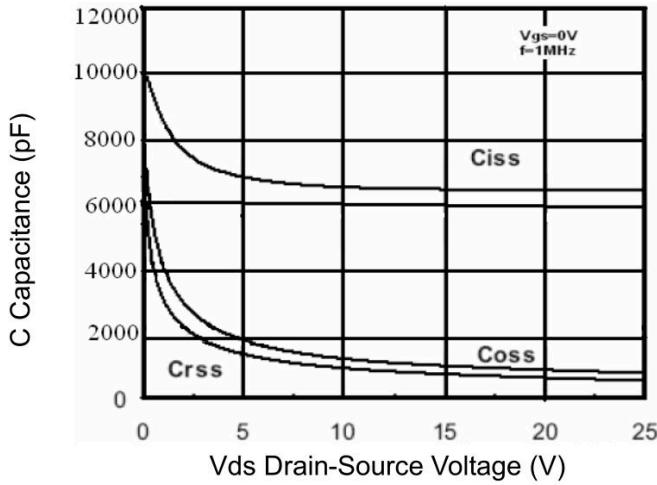


**Figure 7 Capacitance vs Vds**

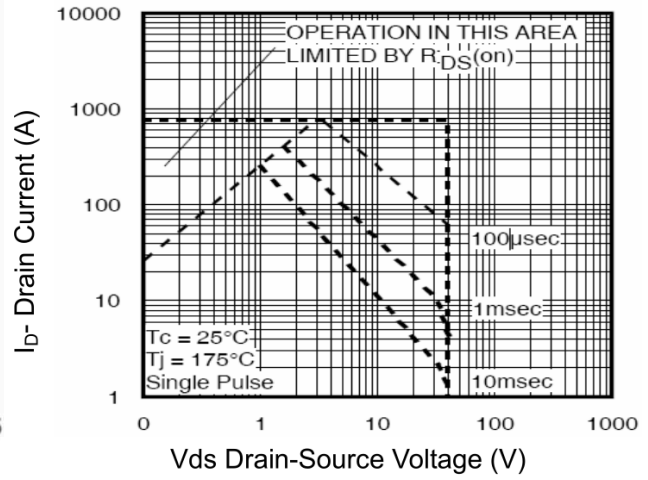


**Figure 8 Safe Operation Area**

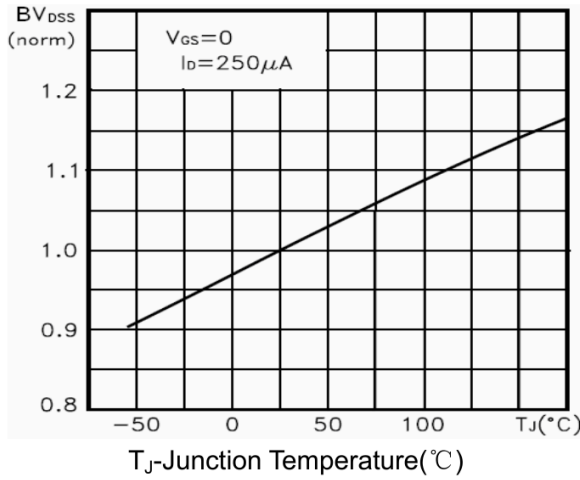

**Figure 9 BV<sub>DSS</sub> vs Junction Temperature**

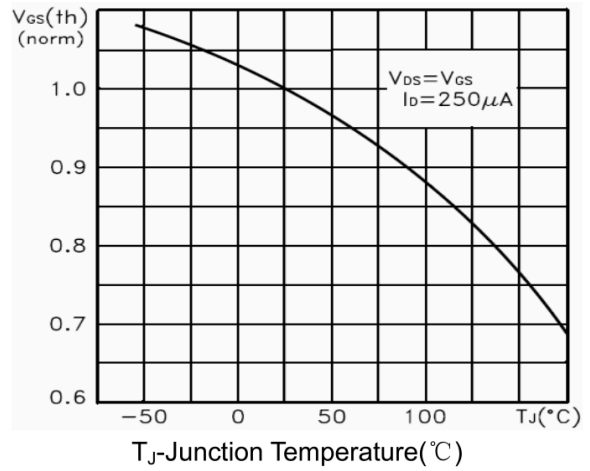


**Figure 10 V<sub>GS(th)</sub> vs Junction Temperature**

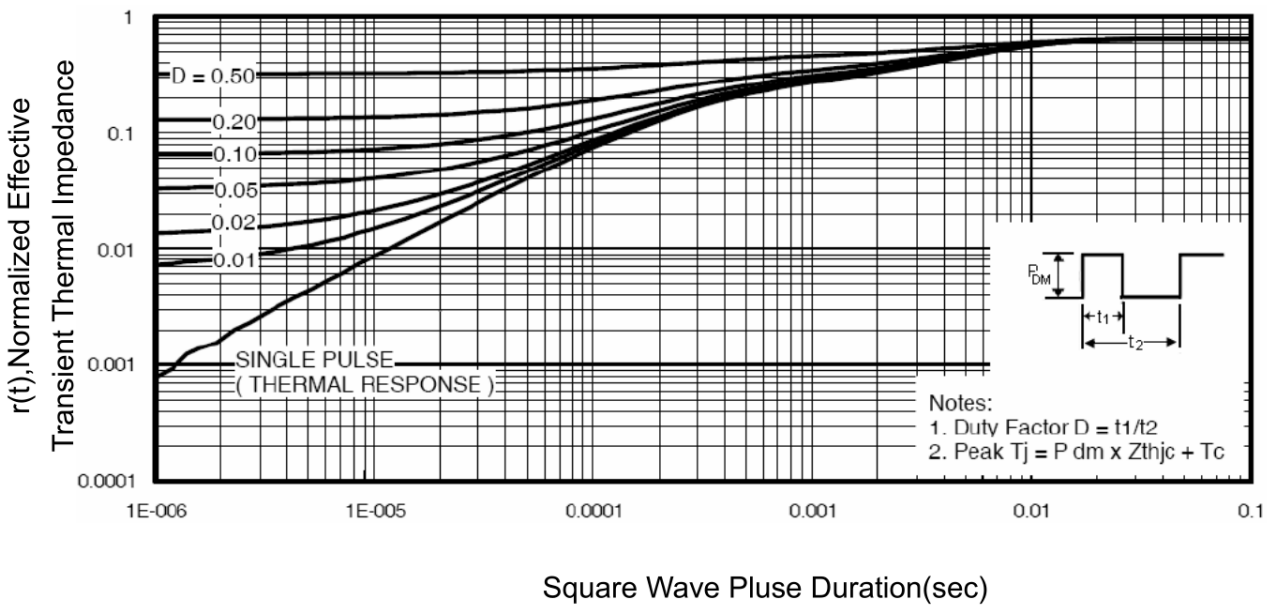

**Figure 11 Normalized Maximum Transient Thermal Impedance**

### TO-263AB Package Information

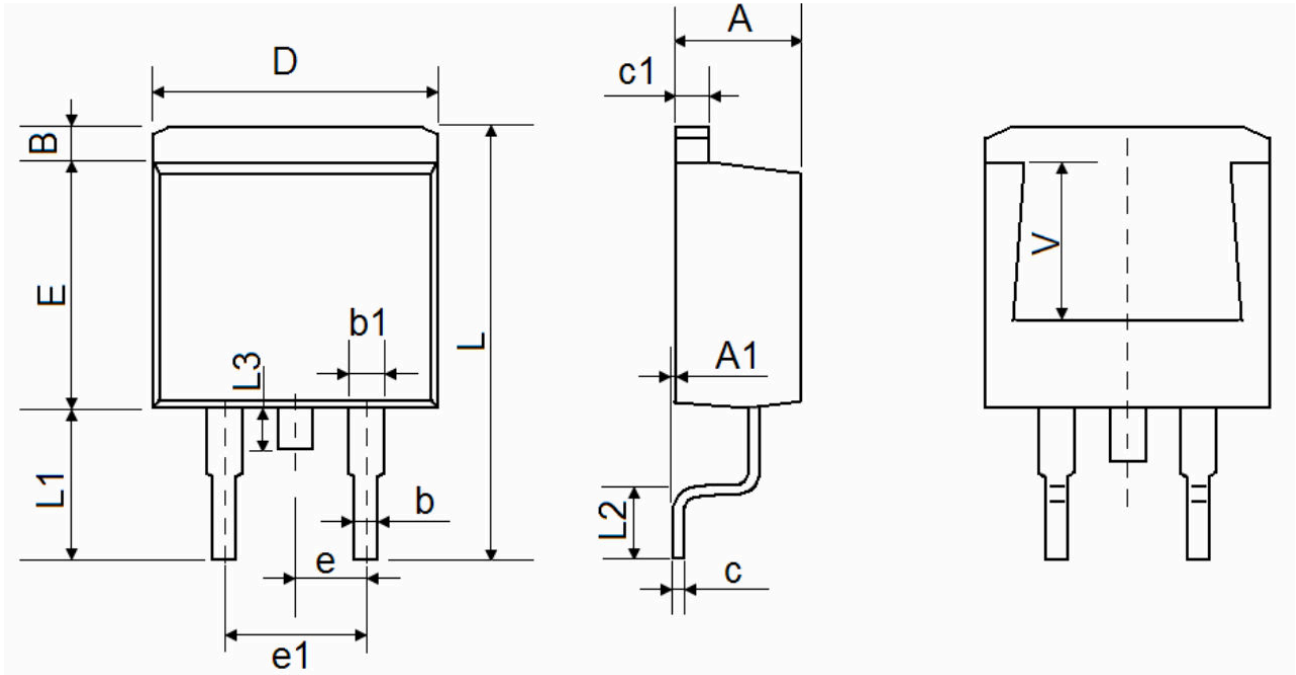

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	4.470	4.670	0.176	0.184
A1	0.000	0.150	0.000	0.006
B	1.170	1.370	0.046	0.054
b	0.710	0.910	0.028	0.036
b1	1.170	1.370	0.046	0.054
c	0.310	0.530	0.012	0.021
c1	1.170	1.370	0.046	0.054
D	10.010	10.310	0.394	0.406
E	8.500	8.900	0.335	0.350
e	2.540 TYP.		0.100 TYP.	
e1	4.980	5.180	0.196	0.204
L	15.050	15.450	0.593	0.608
L1	5.080	5.480	0.200	0.216
L2	2.340	2.740	0.092	0.108
L3	1.300	1.700	0.051	0.067
V	5.600 REF.		0.220 REF.	