

Product Summary

$V_{(BR)DSS}$	$R_{DS(on)MAX}$	I_b
100V	13mΩ@10V	12A
	15mΩ@4.5V	

Feature

- Advanced trench process technology
- Very low On-Resistance
- Suffix "-Q1" for AEC-Q101

Application


- DC/DC Converter
- Ideal for high-frequency switching and synchronous rectification

Package




SOP-8

Circuit diagram

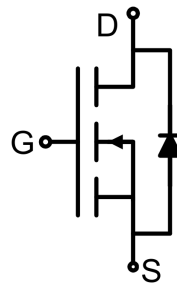

Marking

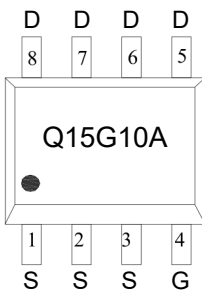

Absolute maximum ratings ($T_A=25^\circ\text{C}$, unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	100	V
Gate-Source Voltage	V_{GS}	± 20	V
Continuous Drain Current	I_D	12	A
Pulsed Drain Current	I_{DM}	48	A
Power Dissipation	P_D	3.5	W
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	36	$^\circ\text{C/W}$
Single pulse avalanche energy	E_{AS}	152	mJ
Junction Temperature	T_J	150	$^\circ\text{C}$
Storage Temperature	T_{STG}	-55 ~ +150	$^\circ\text{C}$

Electrical characteristics ($T_A=25^\circ\text{C}$, unless otherwise noted)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Static Characteristics						
Drain-source breakdown voltage	$V_{(BR)DSS}$	$V_{GS} = 0V, I_D = 250\mu\text{A}$	100			V
Zero gate voltage drain current	I_{DSS}	$V_{DS} = 100V, V_{GS} = 0V$			1	μA
Gate-body leakage current	I_{GSS}	$V_{GS} = \pm 20V, V_{DS} = 0V$			± 100	nA
Gate threshold voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = 250\mu\text{A}$	1.0		3.0	V
Drain-source on-resistance ¹⁾	$R_{DS(on)}$	$V_{GS} = 10V, I_D = 12A$		10.0	13	m Ω
		$V_{GS} = 4.5V, I_D = 12A$		11.5	15	
Dynamic characteristics²⁾						
Input Capacitance	C_{iss}	$V_{DS} = 50V, V_{GS} = 0V, f = 1\text{MHz}$		2270		pF
Output Capacitance	C_{oss}			797		
Reverse Transfer Capacitance	C_{rss}			36		
Total Gate Charge	Q_g	$V_{DS} = 50V, V_{GS} = 10V, I_D = 10A$		32		nC
Gate-Source Charge	Q_{gs}			11.1		
Gate-Drain Charge	Q_{gd}			4.78		
Turn-on delay time	$t_{d(on)}$	$V_{DD} = 50V, V_{GS} = 10V, I_D = 10A, R_{GEN} = 2.2\Omega$		51		nS
Turn-on rise time	t_r			14.4		
Turn-off delay time	$t_{d(off)}$			69.2		
Turn-off fall time	t_f			20.6		
Source-Drain Diode characteristics						
Diode Forward Current ¹⁾	I_S				12	A
Diode Forward voltage	V_{DS}	$V_{GS} = 0V, I_S = 12A$			1.2	V
Reverse Recovery Time	t_{rr}	$T_J = 25^\circ\text{C}, I_F = 10A, di/dt = 100A/\mu\text{s}^1)$		51.5		nS
Reverse Recovery Charge	Q_{rr}			84		nC

Notes:

- 1) Pulse Test: Pulse Width < 300 μs , Duty Cycle $\leq 2\%$.
- 2) Guaranteed by design, not subject to production testing.

Typical Characteristics

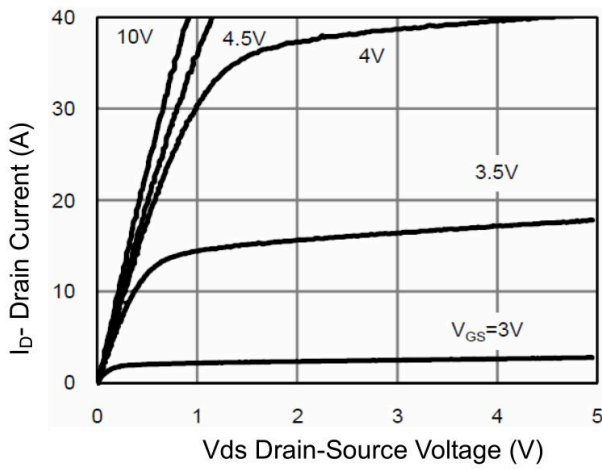


Figure 1 Output Characteristics

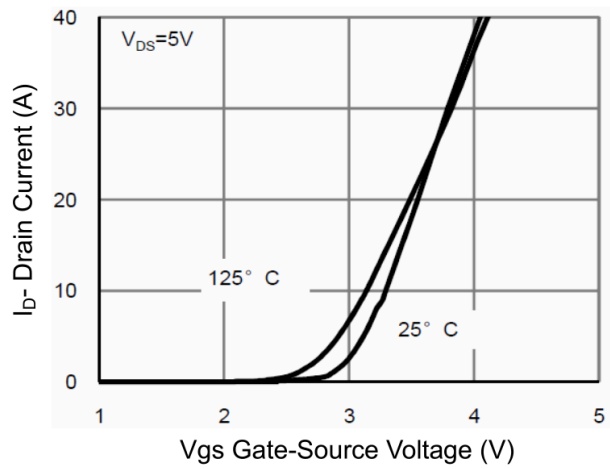


Figure 2 Transfer Characteristics

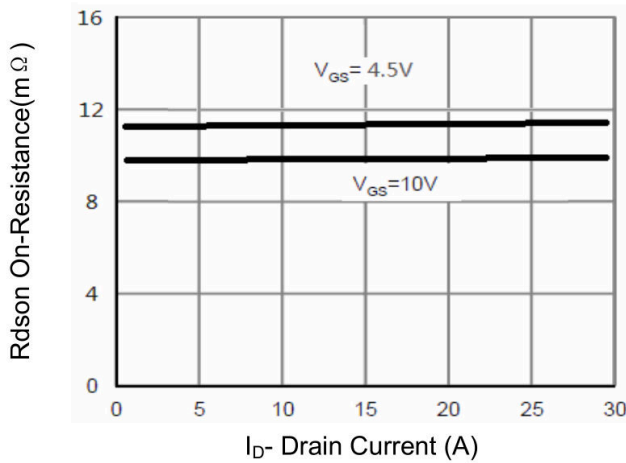


Figure 3 Rdson- Drain Current

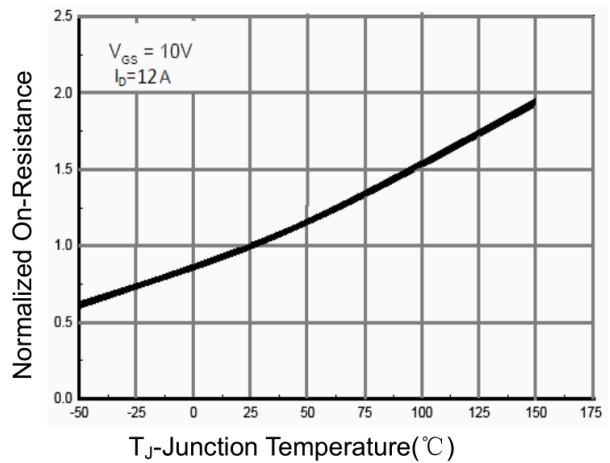


Figure 4 Rdson-Junction Temperature

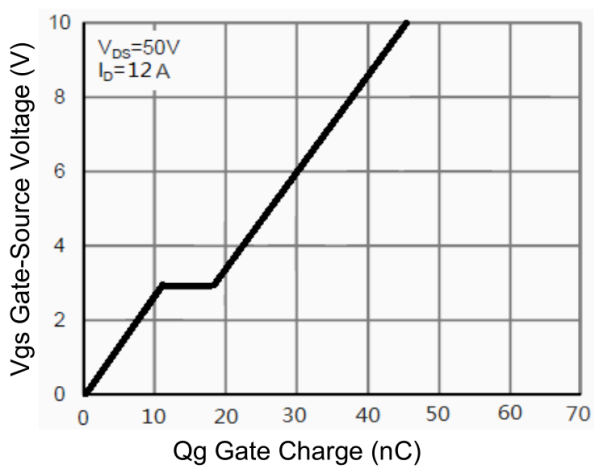


Figure 5 Gate Charge

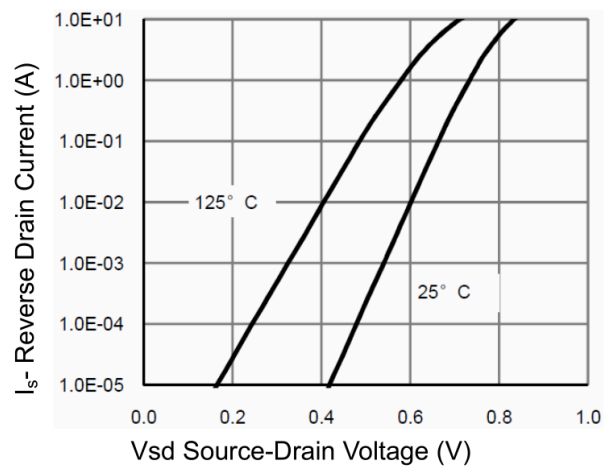


Figure 6 Source- Drain Diode Forward

Typical Characteristics

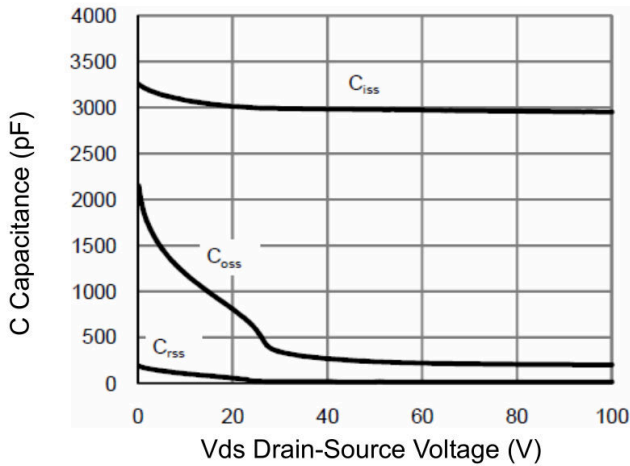


Figure 7 Capacitance vs Vds

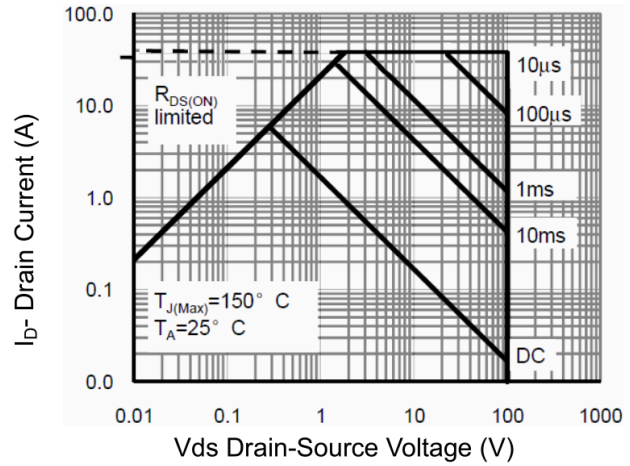


Figure 8 Safe Operation Area

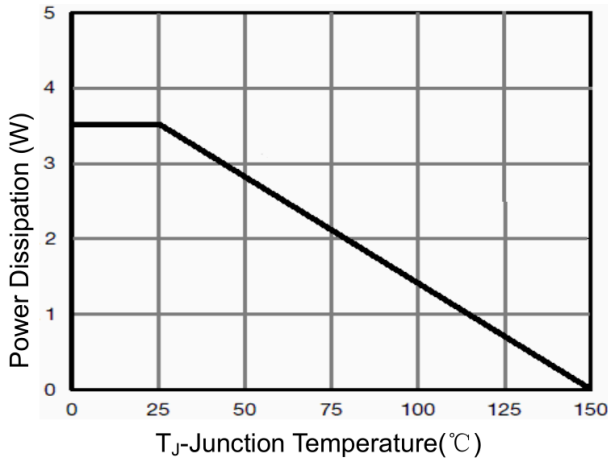


Figure 9 Power De-rating

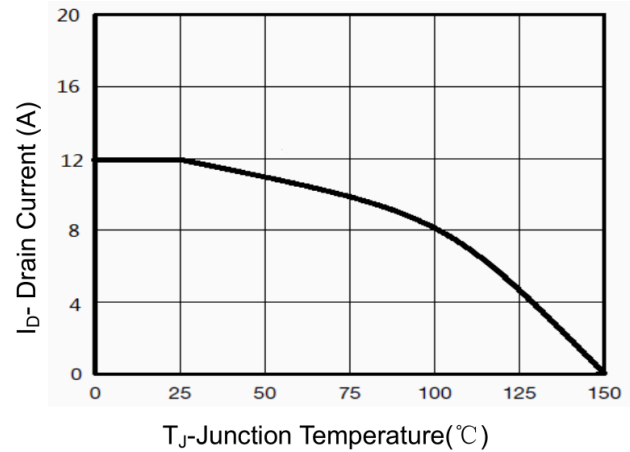


Figure 10 Current De-rating


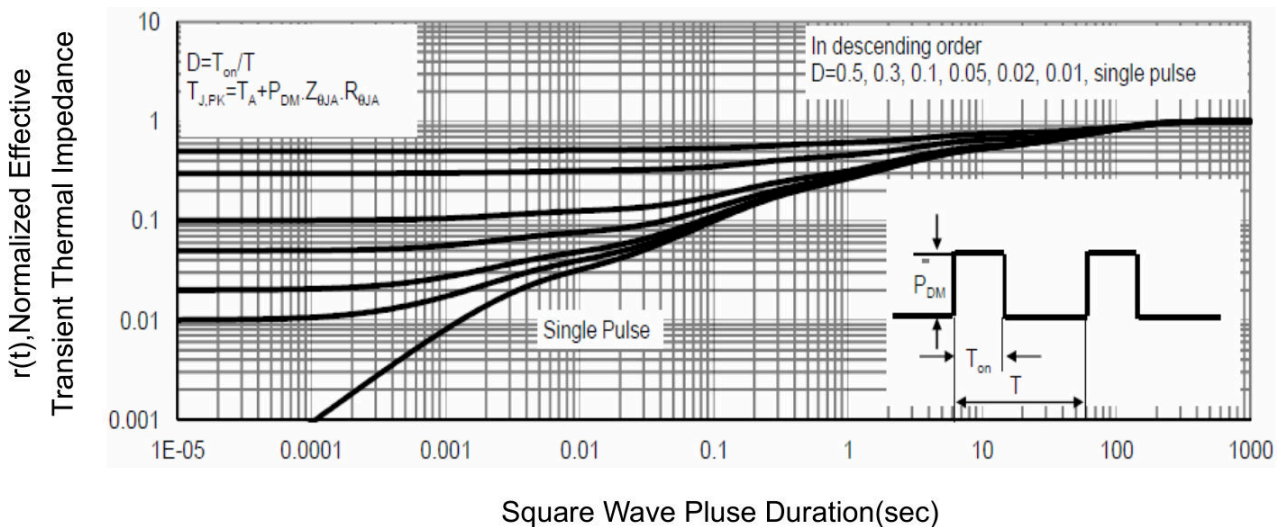


Figure 11 Normalized Maximum Transient Thermal Impedance

SOP-8 Package Information

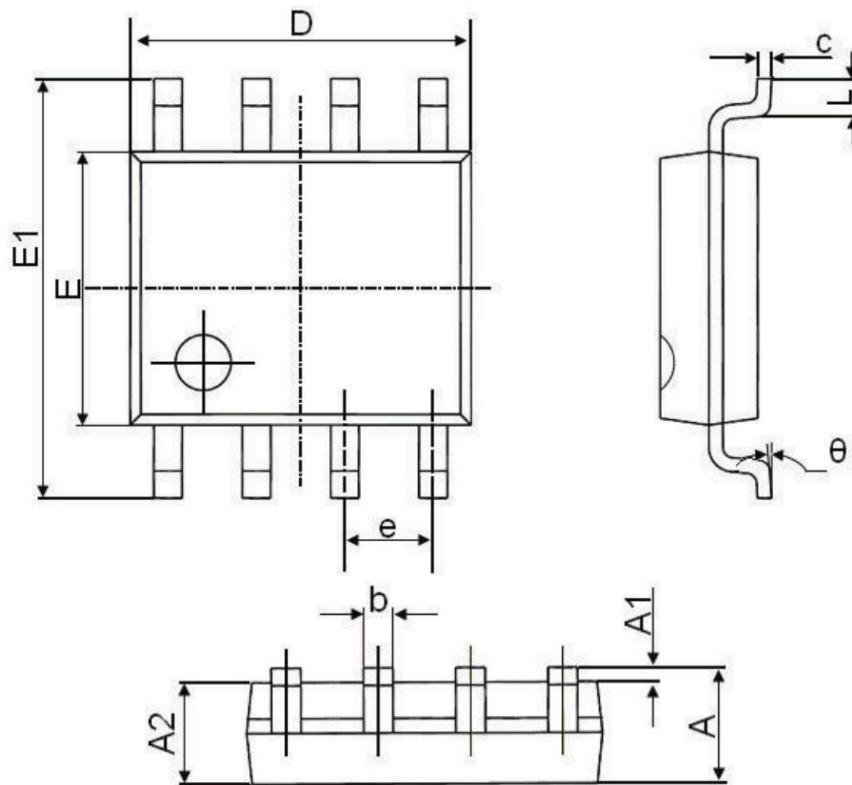

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	1.350	1.750	0.053	0.069
A1	0.100	0.250	0.004	0.010
A2	1.350	1.550	0.053	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.006	0.010
D	4.700	5.100	0.185	0.200
E	3.800	4.000	0.150	0.157
E1	5.800	6.200	0.228	0.244
e	1.270(BSC)		0.050(BSC)	
L	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°