

Product Summary

$V_{(BR)DSS}$	$R_{DS(on)MAX}$	I_D
-60V	180mΩ@-10V	-1.8A
	200mΩ@-4.5V	

Feature

- High density cell design for ultra low Rdson
- Super Low Gate Charge
- Excellent package for good heat dissipation
- Advanced high cell density Trench technology

Application


- Load Switch for Portable Devices
- DC/DC Converter

Package




SOT-23

Circuit diagram



Marking



Absolute maximum ratings (Ta=25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	-60	V
Gate-Source Voltage	V_{GS}	± 20	V
Continuous Drain Current	I_D	-1.8	A
Pulsed Drain Current	I_{DM}	-7.2	A
Power Dissipation	P_D	1.5	W
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	83.3	°C/W
Junction Temperature	T_J	150	°C
Storage Temperature	T_{STG}	-55 ~ +150	°C







Electrical characteristics (Ta=25 °C, unless otherwise noted)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Static Characteristics						
Drain-source breakdown voltage	$V_{(BR)DSS}$	$V_{GS} = 0V, I_D = -250\mu A$	-60			V
Zero gate voltage drain current	I_{DSS}	$V_{DS} = -60V, V_{GS} = 0V$			-1	μA
Gate-body leakage current	I_{GSS}	$V_{GS} = \pm 20V, V_{DS} = 0V$			± 100	nA
Gate threshold voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = -250\mu A$	-1.0	-1.5	-2.5	V
Drain-source on-resistance	$R_{DS(on)}$	$V_{GS} = -10V, I_D = -1.5A$		140	180	m Ω
		$V_{GS} = -4.5V, I_D = -1.0A$		160	200	
Dynamic characteristics ¹⁾						
Input Capacitance	C_{iss}	$V_{DS} = -10V, V_{GS} = 0V, f = 1MHz$		750		pF
Output Capacitance	C_{oss}			85		
Reverse Transfer Capacitance	C_{rss}			45		
Total Gate Charge	Q_g	$V_{DS} = -30V, V_{GS} = -10V, I_D = -1.5A$		7.2		nC
Gate-Source Charge	Q_{gs}			2		
Gate-Drain Charge	Q_{gd}			2		
Turn-on delay time	$t_{d(on)}$	$V_{DS} = -30V, V_{GS} = -10V, I_D = -1A, R_G = 10\Omega$		9		nS
Turn-on rise time	t_r			12		
Turn-off delay time	$t_{d(off)}$			45		
Turn-off fall time	t_f			10		
Source-Drain Diode characteristics						
Diode Forward voltage	V_{SD}	$V_{GS} = 0V, I_S = -1A$			-1.2	V






Notes:

1) Guaranteed by design, not subject to production testing.




Typical Characteristics

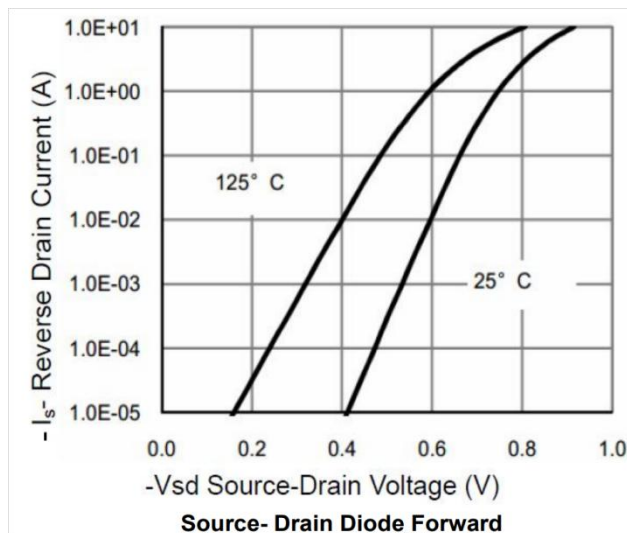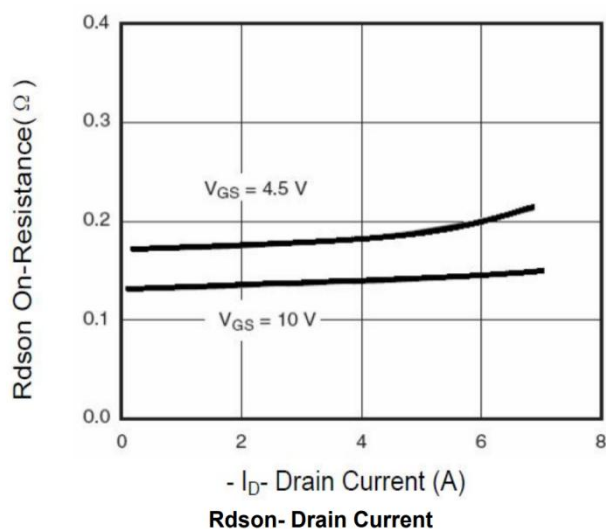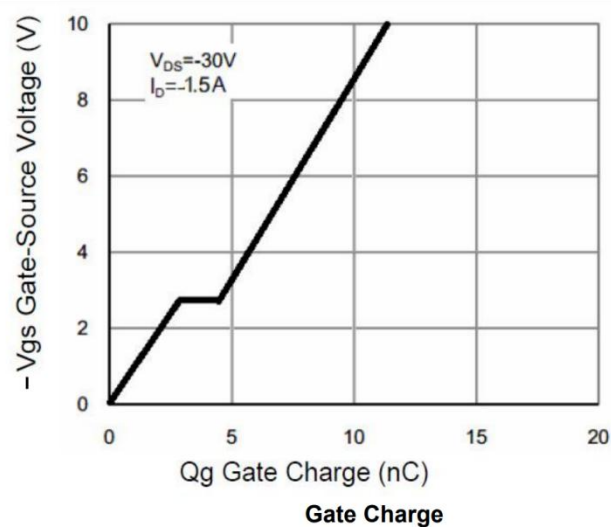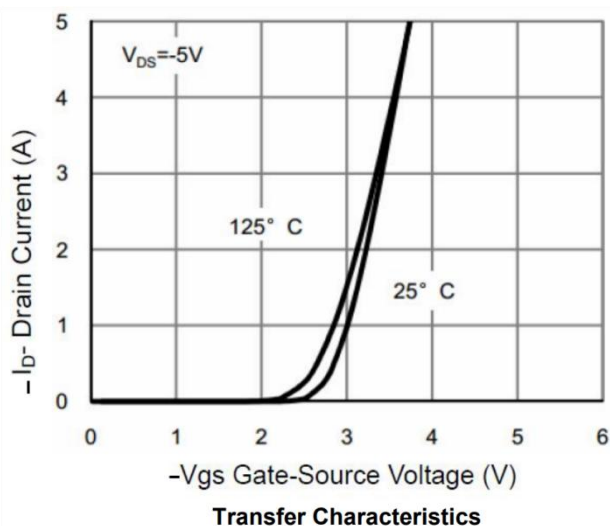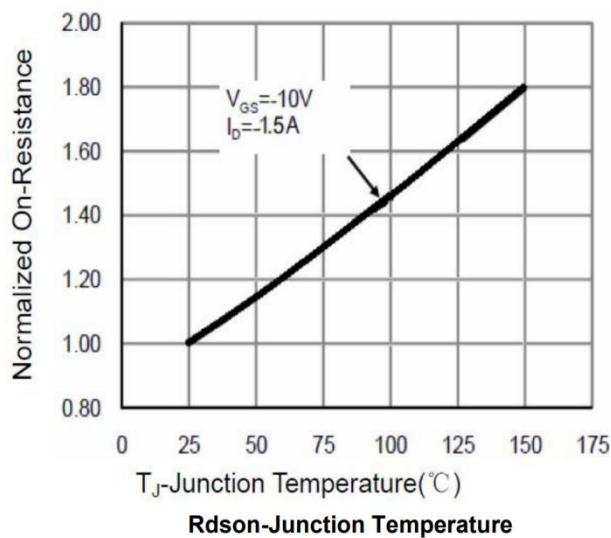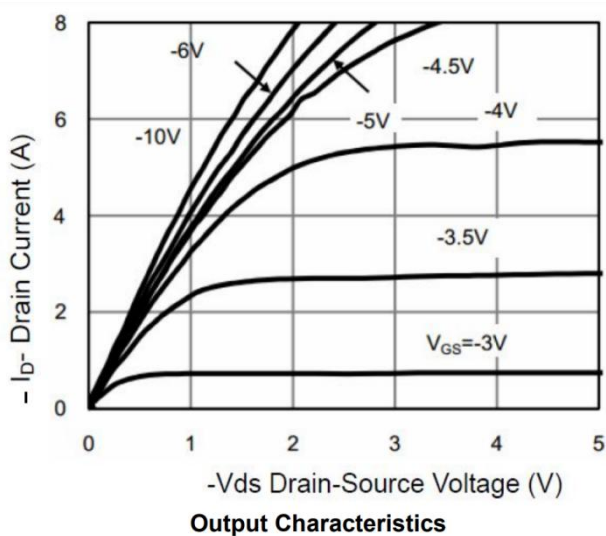

Typical Characteristics

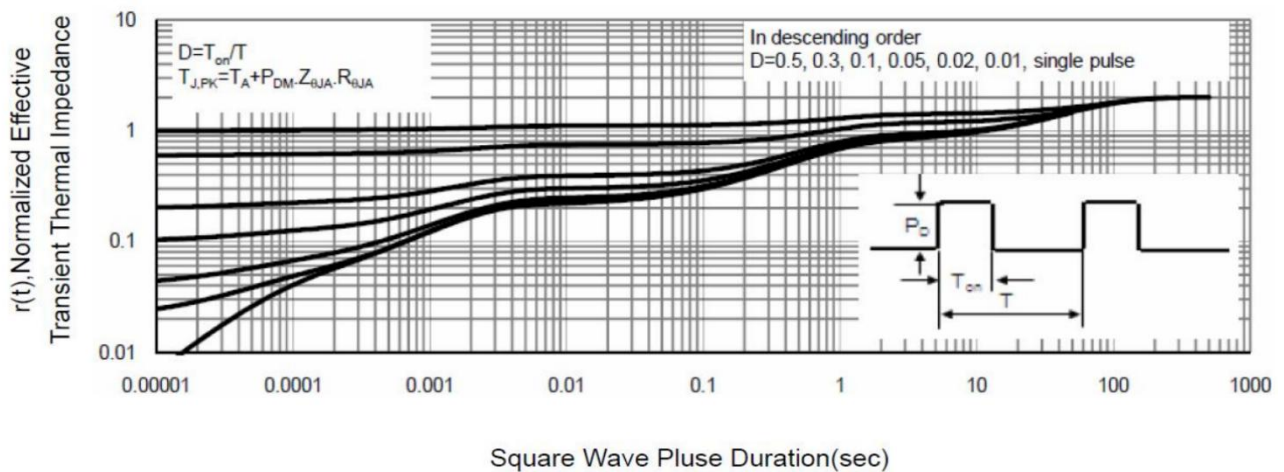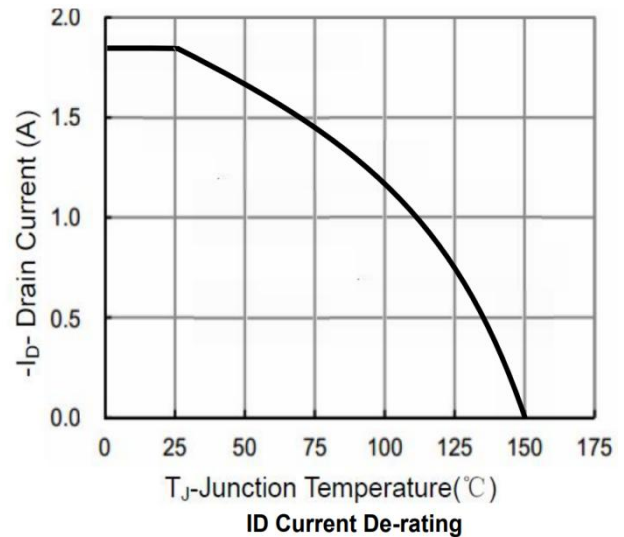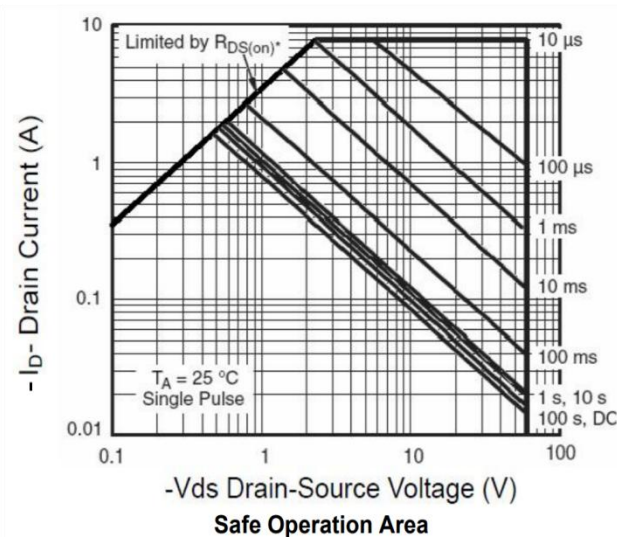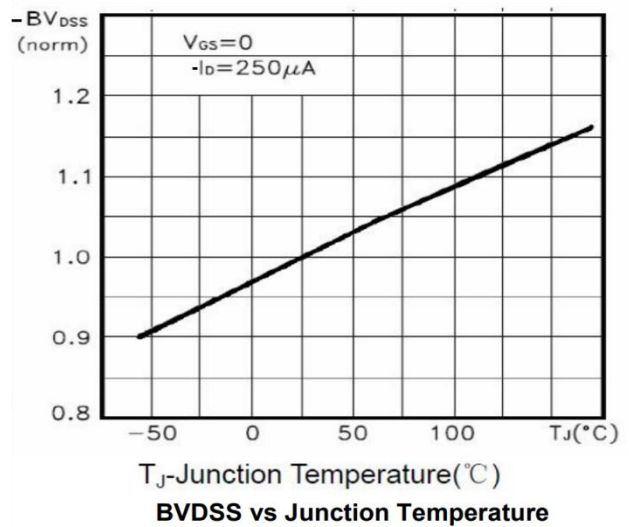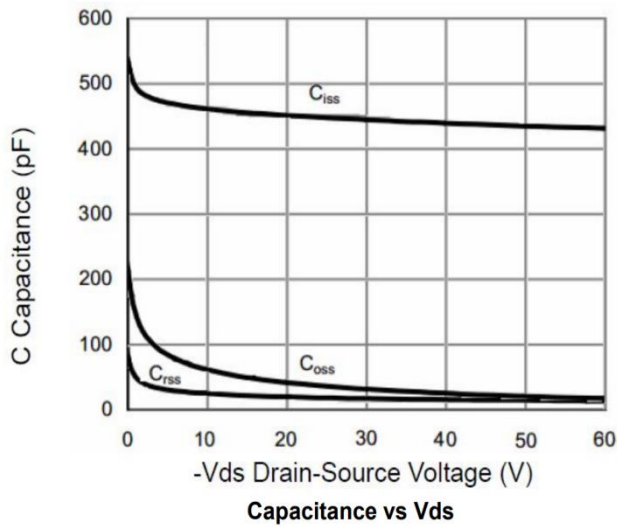

SOT-23 Package Information

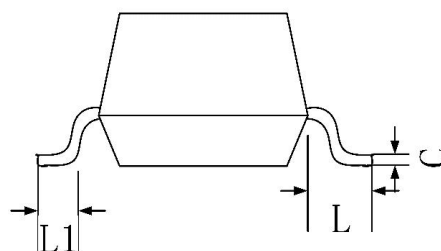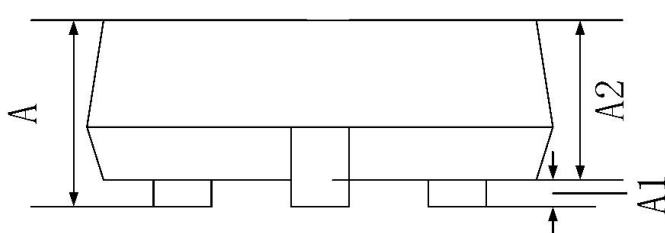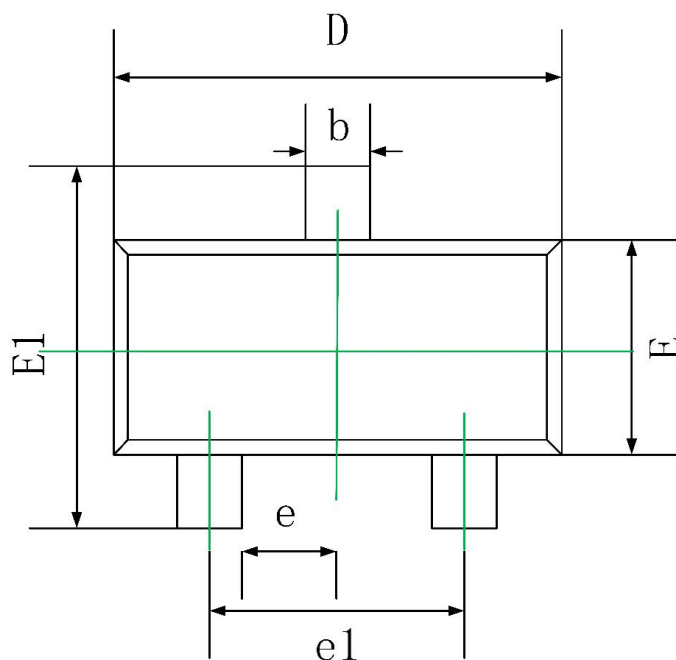

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP.		0.037 TYP.	
e1	1.800	2.000	0.071	0.079
L	0.550 REF.		0.022 REF.	
L1	0.300	0.500	0.012	0.020