


Features

- Well package design with solder pad on the bottom for best thermal performance
- Leads on two opposing sides of the body
- 1500W peak pulse power capability with a 10/1000 μ s waveform, repetition rate (duty cycle): 0.01%
- Uni and Bidirectional unit
- Glass passivated chip junction
- Excellent clamping capability
- Low incremental surge resistance
- Lead-free parts meet RoHS requirements
- Compliant to Halogen-free

Mechanical data

- Epoxy: UL94-V0 rated flame retardant
- Case : Molded plastic, SMA-NT
- Terminals : Solder plated, solderable per MIL-STD-750, Method 2026
- Polarity : Indicated by cathode band(Uni-directional types only)
- Mounting Position : Any

Package outline

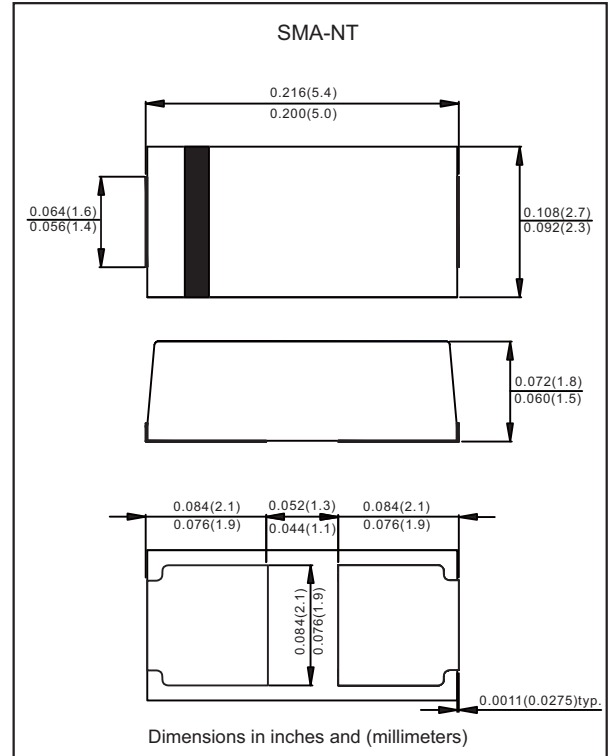

Maximum ratings (AT $T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Conditions	Symbol	Value	Unit
Peak power dissipation	with a 10/1000 μ s waveform, Note 1, 2 & Fig. 1	PPPM	1500	W
Peak pulse current	with a 10/1000 μ s waveform	I _{PPM}	See Table	A
Steady state power dissipation	at $T_L=75^\circ\text{C}$, Note 2	P _{M(AV)}	3.5	W
Typical thermal resistance	Junction to case Junction to ambient	R _{θJC} R _{θJA}	28 48	$^\circ\text{C/W}$
Operating junction temperature range		T _J	-55 to +150	$^\circ\text{C}$
Storage temperature range		T _{STG}	-65 to +175	$^\circ\text{C}$

Notes 1: Non-repetitive current pulse, per Fig. 3 and derated above $T_A=25^\circ\text{C}$ per Fig. 2
 2: Mounted on copper pad area of 0.2"x0.2" (5.0x5.0 mm) per Fig 5






Electrical characteristics (at $T_A=25^\circ\text{C}$ unless otherwise noted)

Part No. (Uni)	Part No. (Bi)	Reverse Stand-off Voltage	Breakdown Voltage @ I_T			Test Current I_T	Maximum Clamping Voltage @ I_{PP}		Maximum Reverse Leakage Current $I_R@V_{RWM}$	Marking Code	
			V_{RWM}	V_{BRMin}	V_{BRMax}		V_C	I_{PP}		Uni	Bi
			Volts	Volts	Volts		mA	Volts			
ASAK5NT40A	ASAK5NT40CA	40	44.4	49.1	1.0	64.5	23.2	5	K5CR	K5YR	
ASAK5NT43A	ASAK5NT43CA	43	47.8	52.8	1.0	69.4	21.6	5	K5CT	K5YT	
ASAK5NT45A	ASAK5NT45CA	45	50.0	55.3	1.0	72.7	20.4	5	K5CV	K5YV	
ASAK5NT48A	ASAK5NT48CA	48	53.3	58.9	1.0	77.4	19.4	5	K5CX	K5YX	
ASAK5NT51A	ASAK5NT51CA	51	56.7	62.7	1.0	82.4	18.2	5	K5CZ	K5YZ	
ASAK5NT54A	ASAK5NT54CA	54	60.0	66.3	1.0	87.1	17.2	5	K5RE	K5ZE	
ASAK5NT58A	ASAK5NT58CA	58	64.4	71.2	1.0	93.6	16.0	5	K5RG	K5ZG	
ASAK5NT60A	ASAK5NT60CA	60	66.7	73.7	1.0	96.8	15.5	5	K5RK	K5ZK	
ASAK5NT64A	ASAK5NT64CA	64	71.1	78.6	1.0	103	14.5	5	K5RM	K5ZM	
ASAK5NT70A	ASAK5NT70CA	70	77.8	86.0	1.0	113	13.2	5	K5RP	K5ZP	
ASAK5NT75A	ASAK5NT75CA	75	83.3	92.1	1.0	121	12.4	5	K5RR	K5ZR	
ASAK5NT78A	ASAK5NT78CA	78	86.7	95.8	1.0	126	11.9	5	K5RT	K5ZT	
ASAK5NT85A	ASAK5NT85CA	85	94.4	104	1.0	137	10.9	5	K5RV	K5ZV	
ASAK5NT90A	ASAK5NT90CA	90	100	111	1.0	146	10.2	5	K5RX	K5ZX	
ASAK5NT100A	ASAK5NT100CA	100	111	123	1.0	162	9.3	5	K5RZ	K5ZZ	
ASAK5NT110A	ASAK5NT110CA	110	122	135	1.0	177	8.4	5	K5SE	K5VE	
ASAK5NT120A	ASAK5NT120CA	120	133	147	1.0	193	7.7	5	K5SG	K5VG	
ASAK5NT130A	ASAK5NT130CA	130	144	159	1.0	209	7.1	5	K5SK	K5VK	
ASAK5NT150A	ASAK5NT150CA	150	167	185	1.0	243	6.2	5	K5SM	K5VM	
ASAK5NT160A	ASAK5NT160CA	160	178	197	1.0	259	5.7	5	K5SP	K5VP	
ASAK5NT170A	ASAK5NT170CA	170	189	209	1.0	275	5.4	5	K5SR	K5VR	
ASAK5NT180A	ASAK5NT180CA	180	201	222	1.0	292	5.1	5	K5ST	K5VT	
ASAK5NT200A	ASAK5NT200CA	200	224	247	1.0	324	4.6	5	K5SV	K5VV	
ASAK5NT220A	ASAK5NT220CA	220	246	272	1.0	356	4.2	5	K5SX	K5VX	
ASAK5NT250A	ASAK5NT250CA	250	279	309	1.0	405	3.71	5	K5SZ	K5VZ	
ASAK5NT300A	ASAK5NT300CA	300	335	371	1.0	486	3.09	5	K5TE	K5UE	
ASAK5NT350A	ASAK5NT350CA	350	391	432	1.0	567	2.65	5	K5TG	K5UG	
ASAK5NT400A	ASAK5NT400CA	400	447	494	1.0	648	2.32	5	K5TK	K5UK	
ASAK5NT440A	ASAK5NT440CA	440	492	544	1.0	713	2.11	5	K5TM	K5UM	
ASAK5NT500A	ASAK5NT500CA	500	558	618	1.0	810	1.86	5	K5TP	K5UP	
ASAK5NT550A	ASAK5NT550CA	550	614	680	1.0	891	1.69	5	K5TR	K5UR	
ASAK5NT600A	ASAK5NT600CA	600	670	741	1.0	971	1.55	5	K5TT	K5UT	
ASAK5NT650A	ASAK5NT650CA	650	726	803	1.0	1052	1.43	5	K5TV	K5UV	
ASAK5NT700A	ASAK5NT700CA	700	782	865	1.0	1133	1.33	5	K5TX	K5UX	
ASAK5NT750A	ASAK5NT750CA	750	837	927	1.0	1213	1.24	5	K5TZ	K5UZ	
ASAK5NT800A	ASAK5NT800CA	800	893	989	1.0	1298	1.16	5	K5XE	K5YE	

Notes 1: Suffix 'C' denotes bi-directional devices. Suffix 'A' denotes 5% tolerance devices

2: Transient Voltage Suppressors (TVS) are devices used to protect vulnerable circuits from electrical overstress such as that caused by electrostatic discharge, inductive load switching and induced lightning. Within the TVS, damaging voltage spikes are limited by clamping or avalanche action of a rugged silicon pn junction which reduces the amplitude of the transient to a nondestructive level. See Fig. 6 & Fig. 7

Rating and characteristic curves

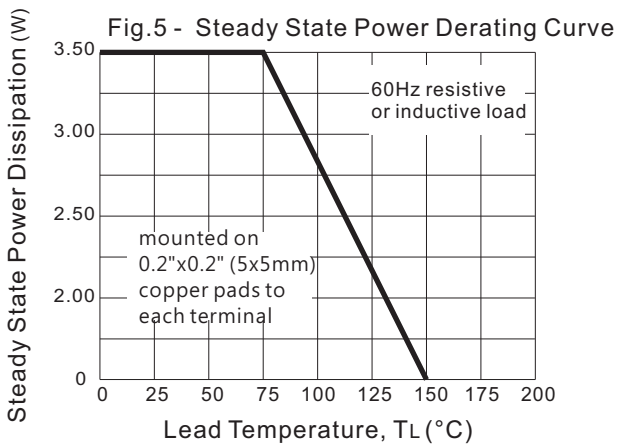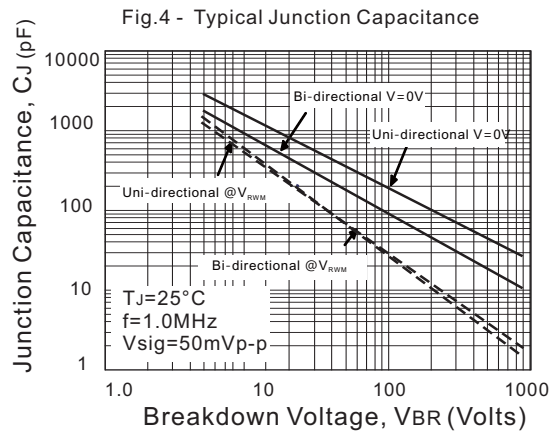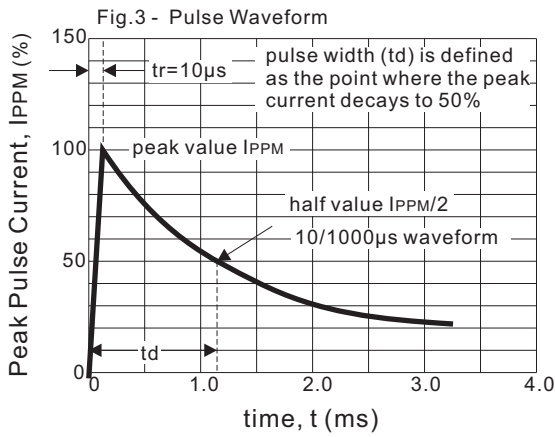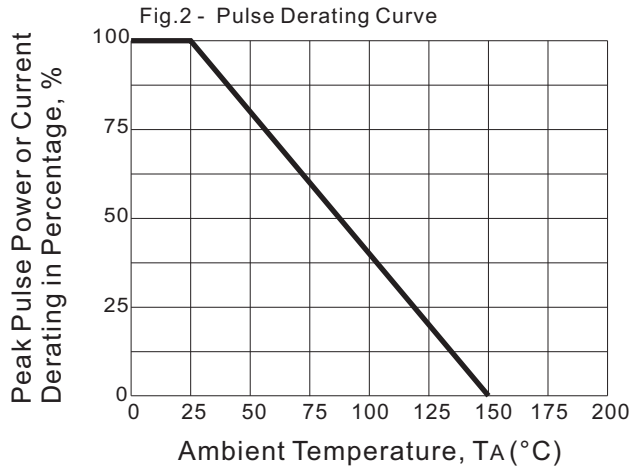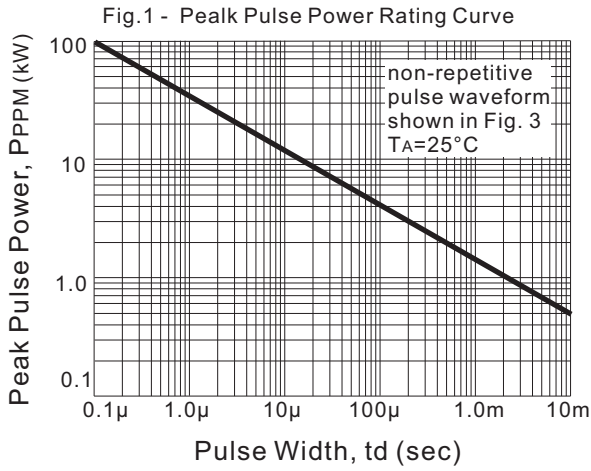

Rating and characteristic curves

Fig. 6 - Transients of several thousand volts can be clamped to a safe level by the TVS


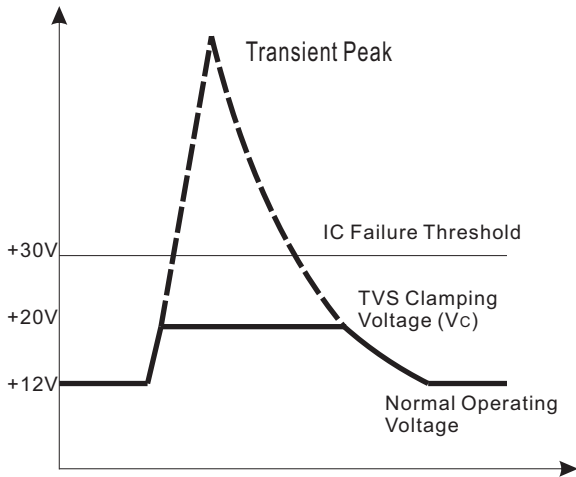








Fig. 7 - Transient current is diverted to ground thru TVS; the voltage seen by the protected load is limited to the clamping voltage level

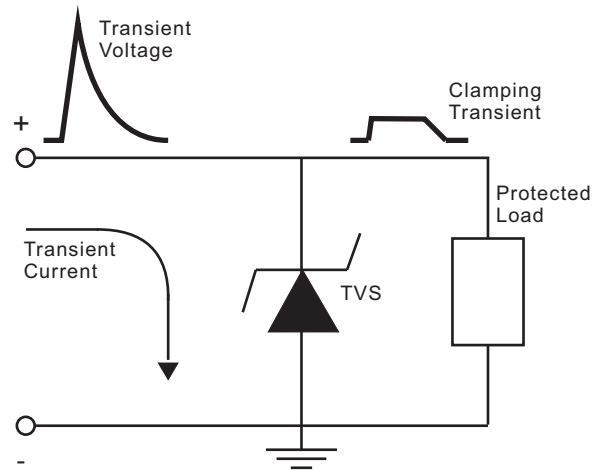


Pinning information

Pin	Simplified outline	Symbol
Uni-Directional Pin1 cathode Pin2 anode		
Bi-Directional		

Marking

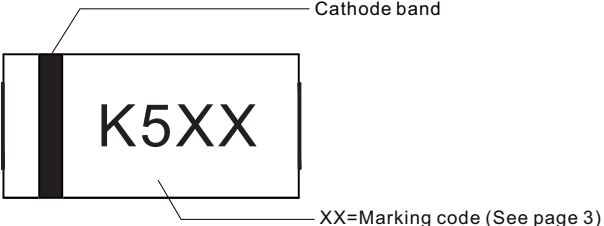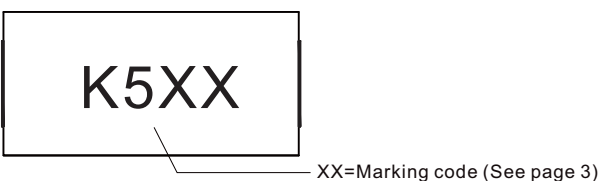Type number	Example
Uni-Directional	
Bi-Directional	

Suggested solder pad layout

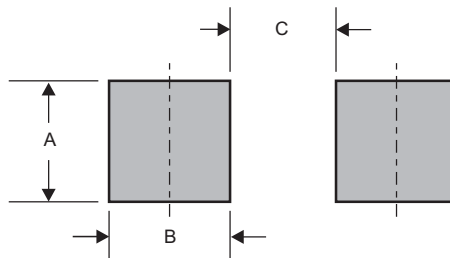

Dimensions in inches and (millimeters)

PACKAGE	A	B	C
SMA-NT	0.084 (2.10)	0.084 (2.10)	0.044 (1.10)