

## Product Summary

$V_{(BR)DSS}$	$R_{DS(on)MAX}$	$I_D$
-60V	80mΩ@-10V	-5A
	110mΩ@-4.5V	


## Feature

- High power and current handling capability
- Surface mount package

## Application


- Battery switch
- DC/DC converter

## Package

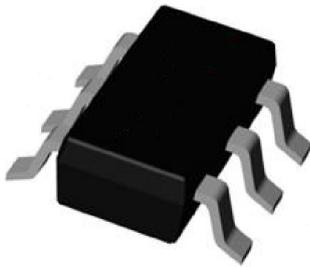


SOT-23-6L

## Circuit diagram

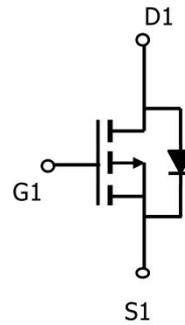

## Marking

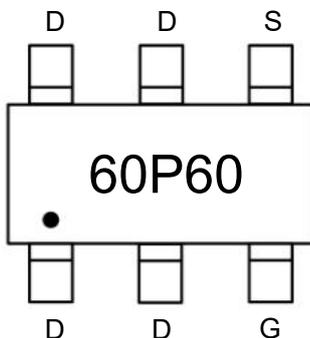

### Absolute maximum ratings ( $T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	$V_{DS}$	-60	V
Gate-Source Voltage	$V_{GS}$	$\pm 20$	V
Continuous Drain Current	$I_D$	-5	A
Pulsed Drain Current	$I_{DM}$	-20	A
Power Dissipation	$P_D$	1	W
Thermal Resistance Junction to Ambient	$R_{\theta JA}$	125	$^\circ\text{C}/\text{W}$
Operating Junction Temperature	$T_J$	-55 ~ +150	$^\circ\text{C}$
Storage Temperature	$T_{STG}$	-55 ~ +150	$^\circ\text{C}$


### Electrical characteristics ( $T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
<b>Static Characteristics</b>						
Drain-source breakdown voltage	$V_{(BR)DSS}$	$V_{GS} = 0\text{V}, I_D = -250\mu\text{A}$	-60			V
Zero gate voltage drain current	$I_{DSS}$	$V_{DS} = -48\text{V}, V_{GS} = 0\text{V}$			-1	$\mu\text{A}$
Gate-body leakage current	$I_{GSS}$	$V_{DS} = 0\text{V}, V_{GS} = \pm 20\text{V}$			$\pm 100$	nA
Gate threshold voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = -250\mu\text{A}$	-1	-2	-3	V
Drain-source on-resistance	$R_{DS(on)}$	$V_{GS} = -10\text{V}, I_D = -2\text{A}$		60	80	m $\Omega$
		$V_{GS} = -4.5\text{V}, I_D = -2\text{A}$		75	110	
<b>Dynamic characteristics<sup>1)</sup></b>						
Input Capacitance	$C_{iss}$	$V_{DS} = -30\text{V}, V_{GS} = 0\text{V}, f = 1\text{MHz}$		1090		pF
Output Capacitance	$C_{oss}$			77		
Reverse Transfer Capacitance	$C_{rss}$			58		
Total Gate Charge	$Q_g$	$V_{DS} = -30\text{V}, V_{GS} = -10\text{V}$ $I_D = -5\text{A}$		23		nC
Gate-Source Charge	$Q_{gs}$			4.2		
Gate-Drain Charge	$Q_{gd}$			4.8		
Turn-on delay time	$t_{d(on)}$	$V_{DS} = -30\text{V}, V_{GS} = -10\text{V}$ $I_D = -5\text{A}, R_G = 3\Omega$		9.8		nS
Turn-on rise time	$t_r$			6.1		
Turn-off delay time	$t_{d(off)}$			44		
Turn-off fall time	$t_f$			12.7		
<b>Source-Drain Diode characteristics</b>						
Diode Forward Current	$I_S$				-5	A
Diode Forward voltage	$V_{SD}$	$V_{GS} = 0\text{V}, I_S = -1\text{A}, T_J = 25^\circ\text{C}$			-1.2	V


Notes:

1) Guaranteed by design, not subject to production.


## Typical Characteristics

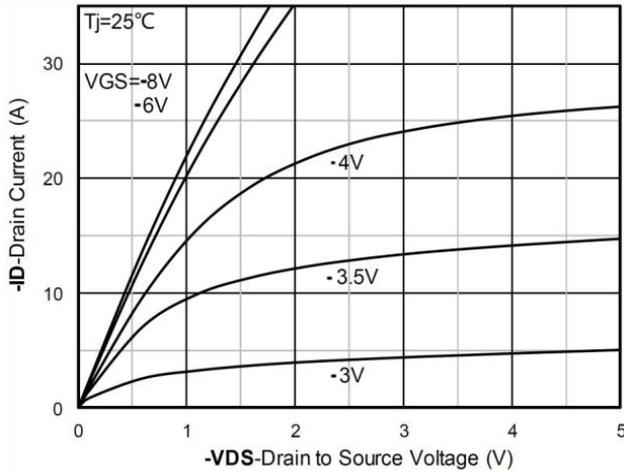


Output Characteristics

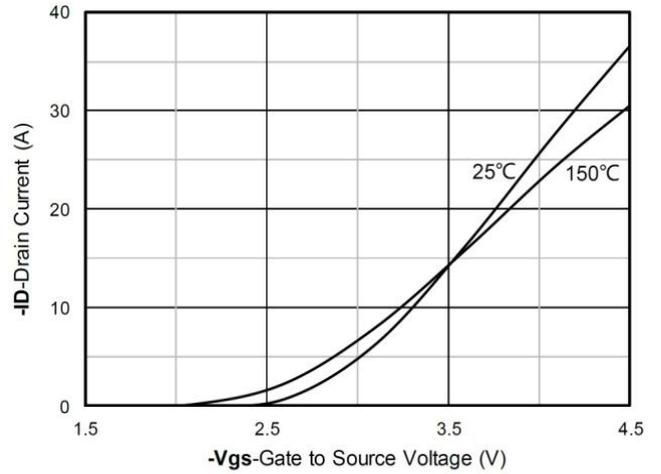


Transfer Characteristics

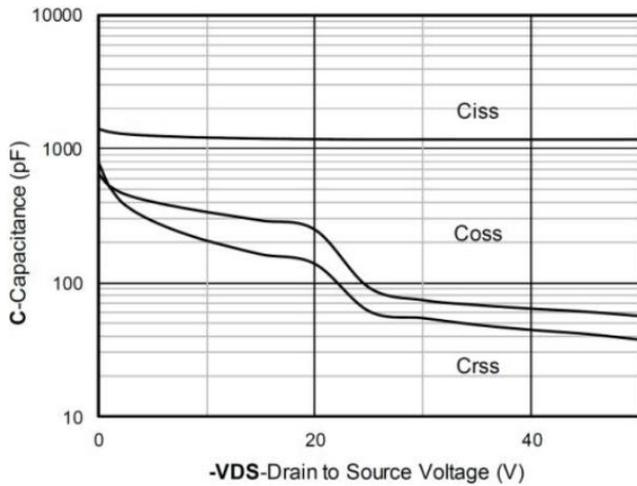


Capacitance Characteristics

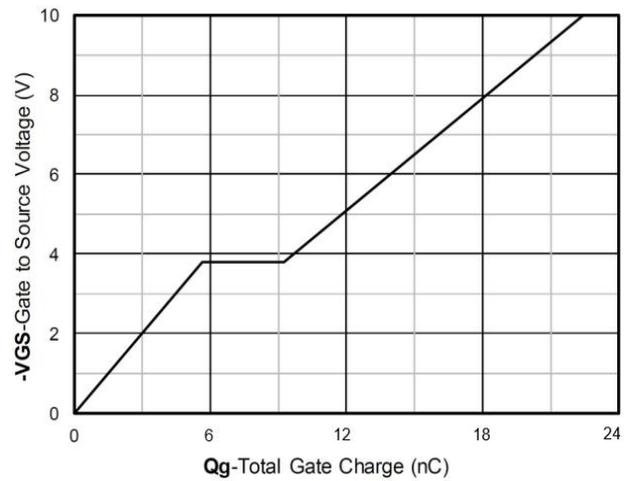

Gate Charge

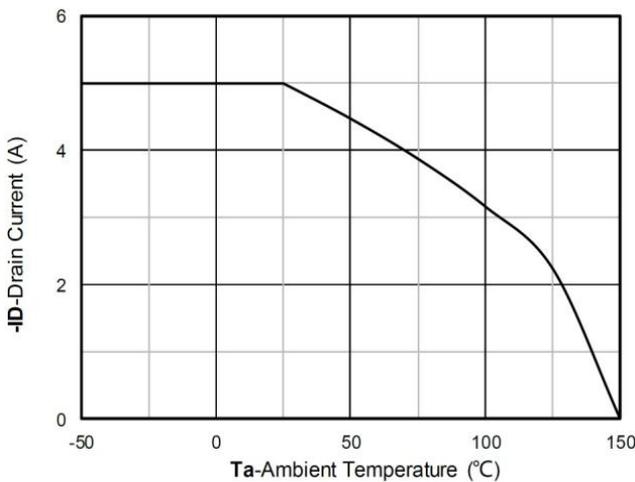


Current dissipation

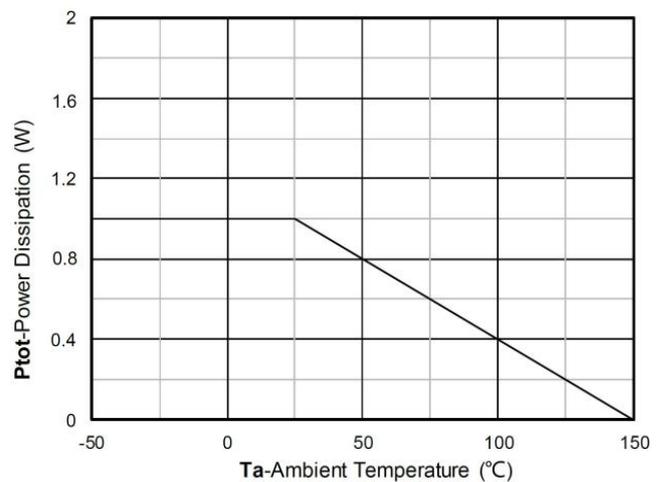


Power dissipation


## Typical Characteristics

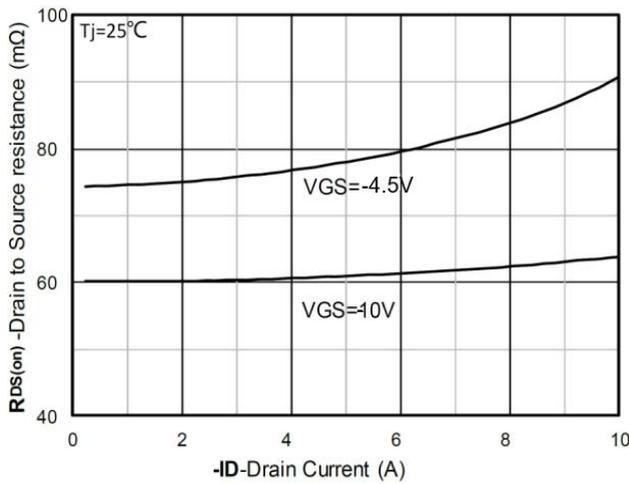


RDS(on) VS Drain Current

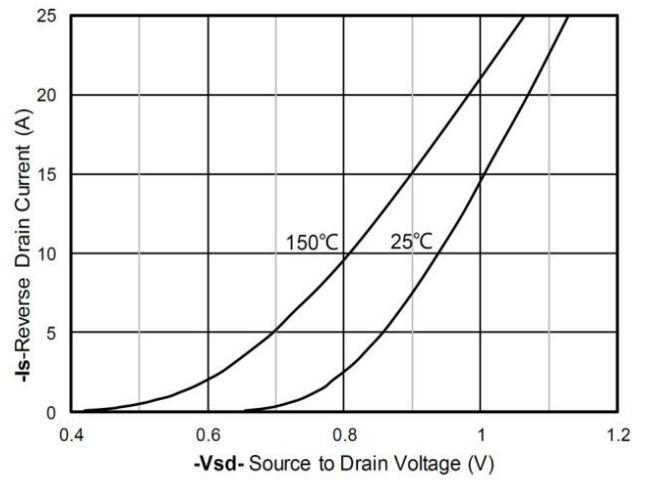


Forward characteristics of reverse diode

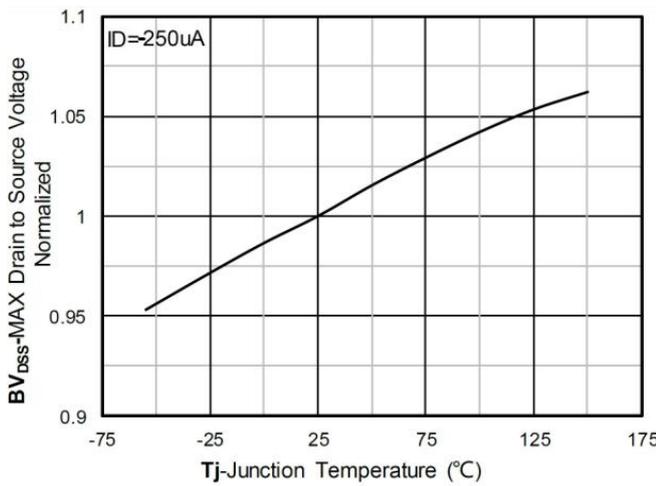


Normalized breakdown voltage

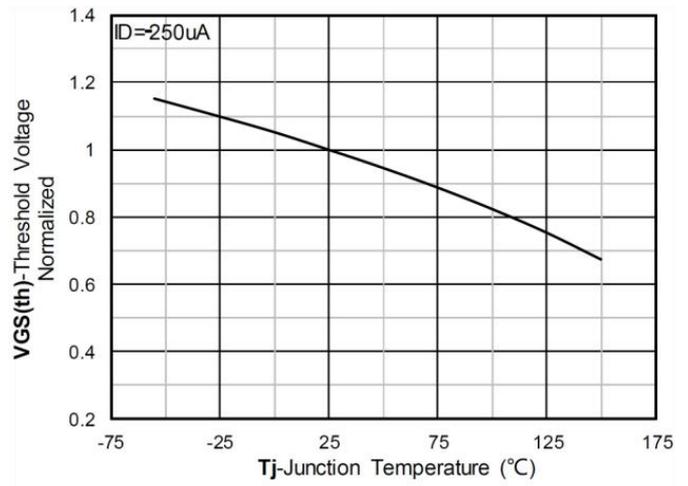

Normalized Threshold voltage

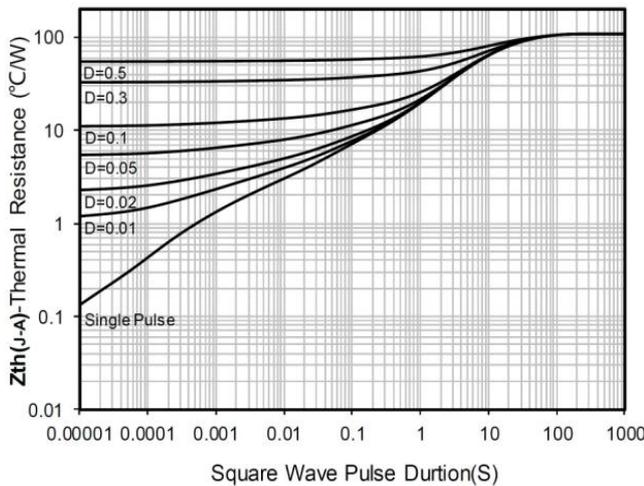


Maximum Transient Thermal Impedance

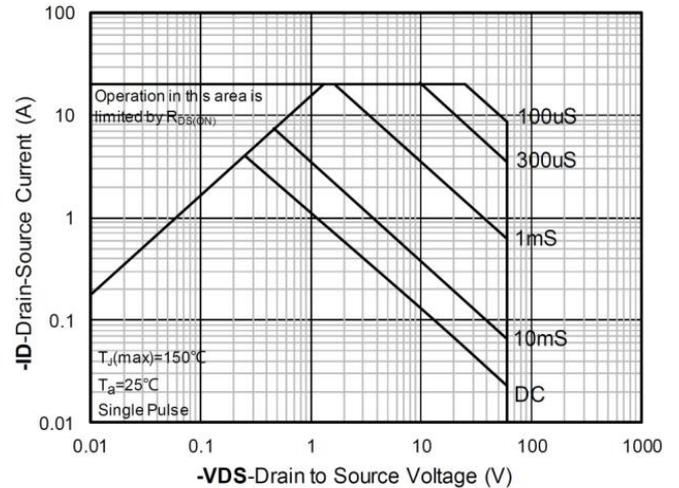

Safe Operation Area

### SOT-23-6L Package Information

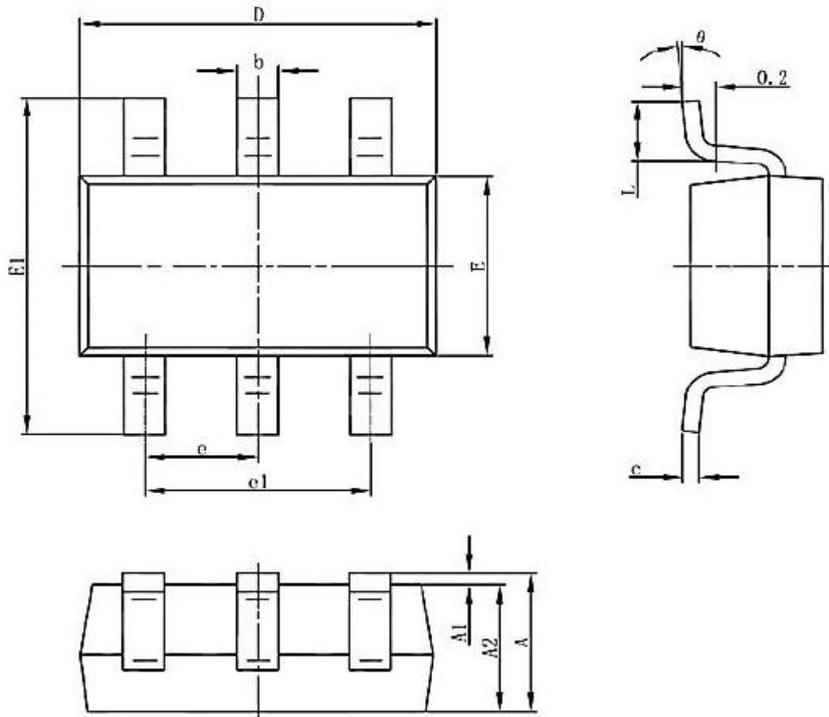

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950 BSC.		0.037 BSC.	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
$\theta$	0°	8°	0°	8°