

Product Summary

$V_{(BR)DSS}$	$R_{DS(on)MAX}$	I_D
20V	380mΩ@4.5V	0.75A
	450mΩ@2.5V	

Feature

- High power and current handling capability
- Surface mount package
- ESD protected

Application


- Battery Switch
- DC/DC Converter

Package




SOT-23

Circuit diagram



Marking



Absolute maximum ratings (T_A=25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V _{DS}	20	V
Gate-Source Voltage	V _{GS}	±12	V
Continuous Drain Current	I _D	0.75	A
Pulsed Drain Current	I _{DM}	3	A
Power Dissipation	P _D	0.35	W
Thermal Resistance Junction to Ambient	R _{θJA}	357	°C/W
Operating Junction Temperature	T _J	-55 ~ +150	°C
Storage Temperature	T _{STG}	-55 ~ +150	°C


Electrical characteristics (T_A=25°C unless otherwise noted)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Static Characteristics						
Drain-source breakdown voltage	V _{(BR)DSS}	V _{GS} =0V, I _D =250μA	20			V
Zero gate voltage drain current	I _{DSS}	V _{DS} =16V, V _{GS} =0V			1	μA
Gate-body leakage current	I _{GSS}	V _{DS} =0V, V _{GS} =±12V			±10	μA
Gate threshold voltage	V _{GS(th)}	V _{DS} =V _{GS} , I _D =250μA	0.3	0.65	1	V
Drain-source on-resistance	R _{DS(on)}	V _{GS} =4.5V, I _D =0.5A		250	380	mΩ
		V _{GS} =2.5V, I _D =0.2A		350	450	
Dynamic characteristics ¹⁾						
Input Capacitance	C _{iss}	V _{DS} =10V, V _{GS} =0V, f =1MHz		35		pF
Output Capacitance	C _{oss}			19		
Reverse Transfer Capacitance	C _{rss}			9		
Total Gate Charge	Q _g	V _{DS} =10V, V _{GS} =4.5V, I _D =0.5A		0.8		nC
Gate-Source Charge	Q _{gs}			0.3		
Gate-Drain Charge	Q _{gd}			0.16		
Turn-on delay time	t _{d(on)}	V _{DS} =10V, V _{GS} =4.5V, I _D =0.5A R _G =10Ω		4		nS
Turn-on rise time	t _r			19		
Turn-off delay time	t _{d(off)}			10		
Turn-off fall time	t _f			21		
Source-Drain Diode characteristics						
Diode Forward Current	I _S				0.75	A
Diode Forward voltage	V _{SD}	V _{GS} =0V, I _S =1A, T _J =25°C			1.2	V


Notes:

1) Guaranteed by design, not subject to production testing.


Typical Characteristics

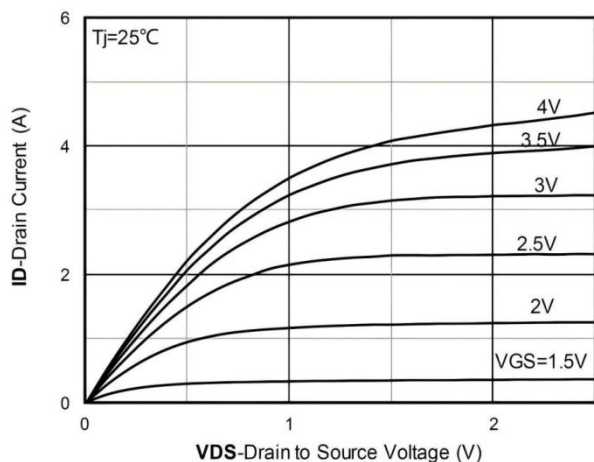


Output Characteristics

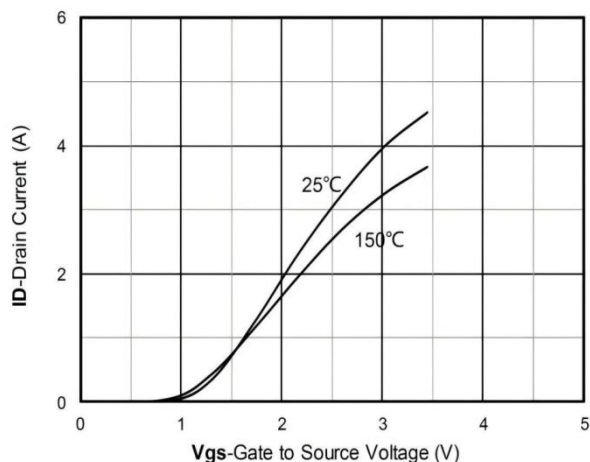


Transfer Characteristics

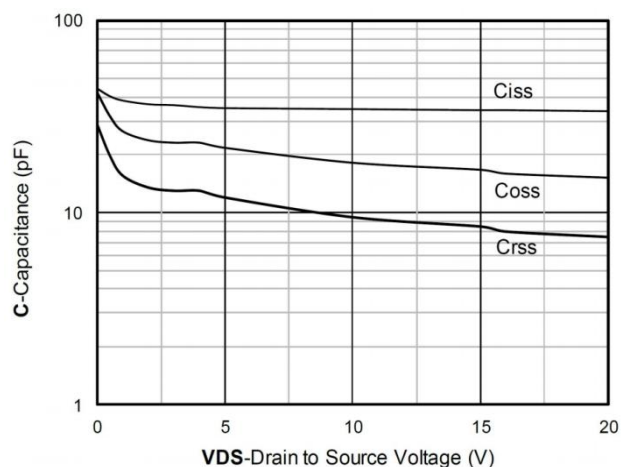


Capacitance Characteristics

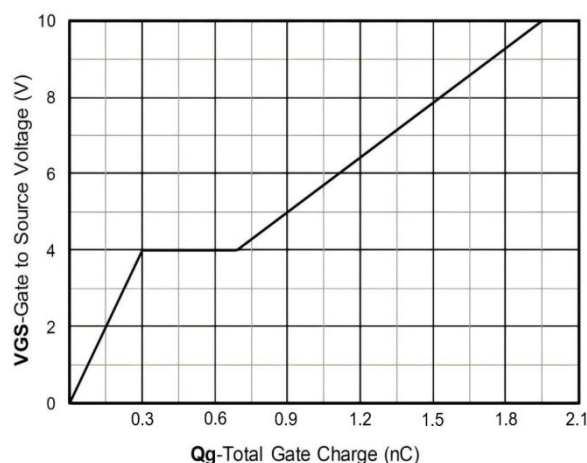

Gate Charge

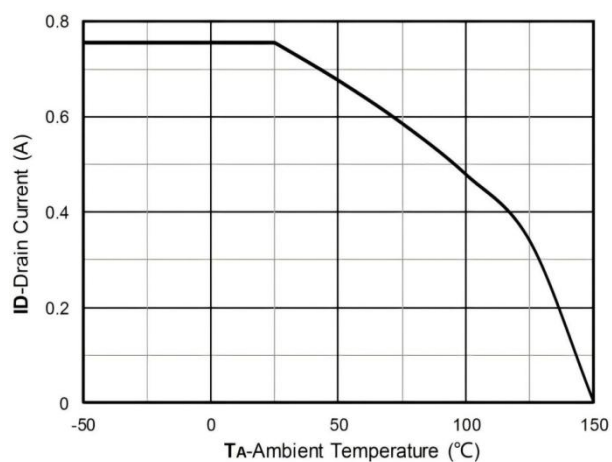


Current dissipation

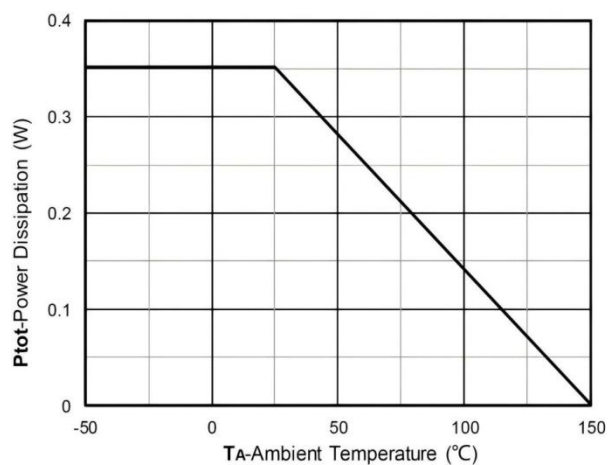


Power dissipation


Typical Characteristics

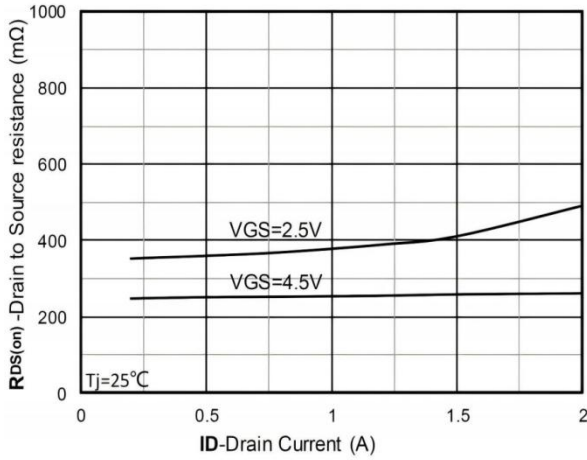


RDS(on) VS Drain Current

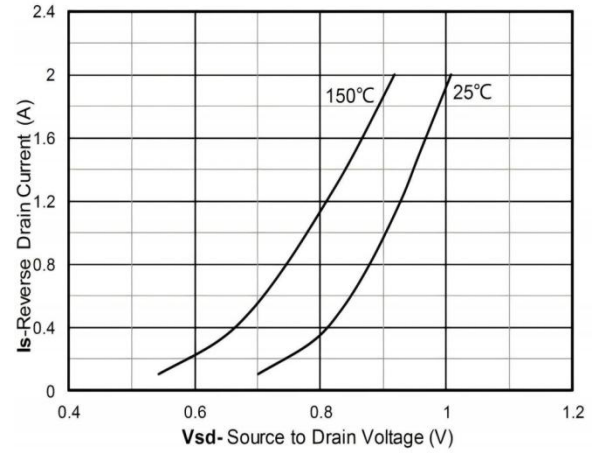


Forward characteristics of reverse diode

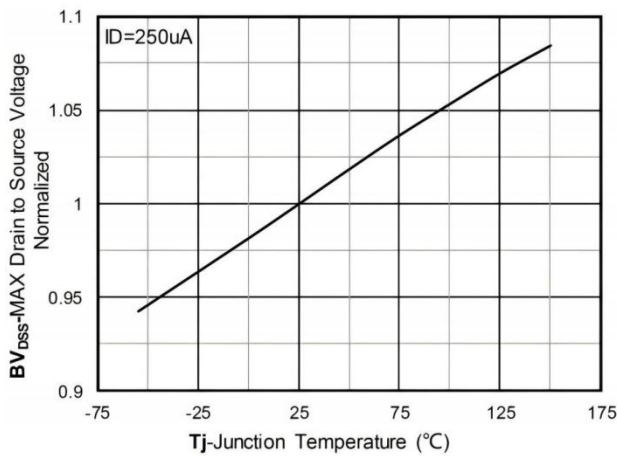


Normalized breakdown voltage

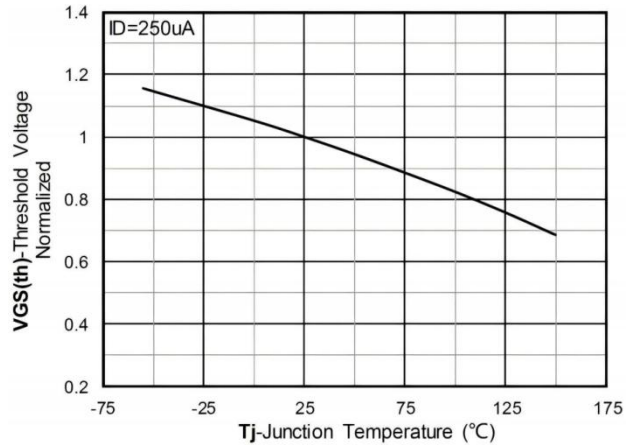

Normalized Threshold voltage

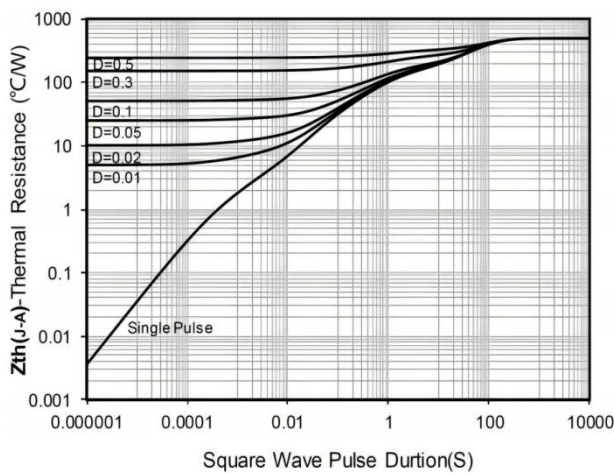


Maximum Transient Thermal Impedance

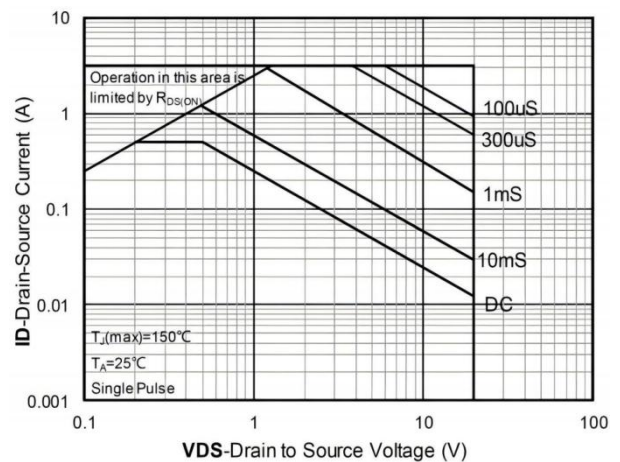

Safe Operation Area

SOT-23 Package Information

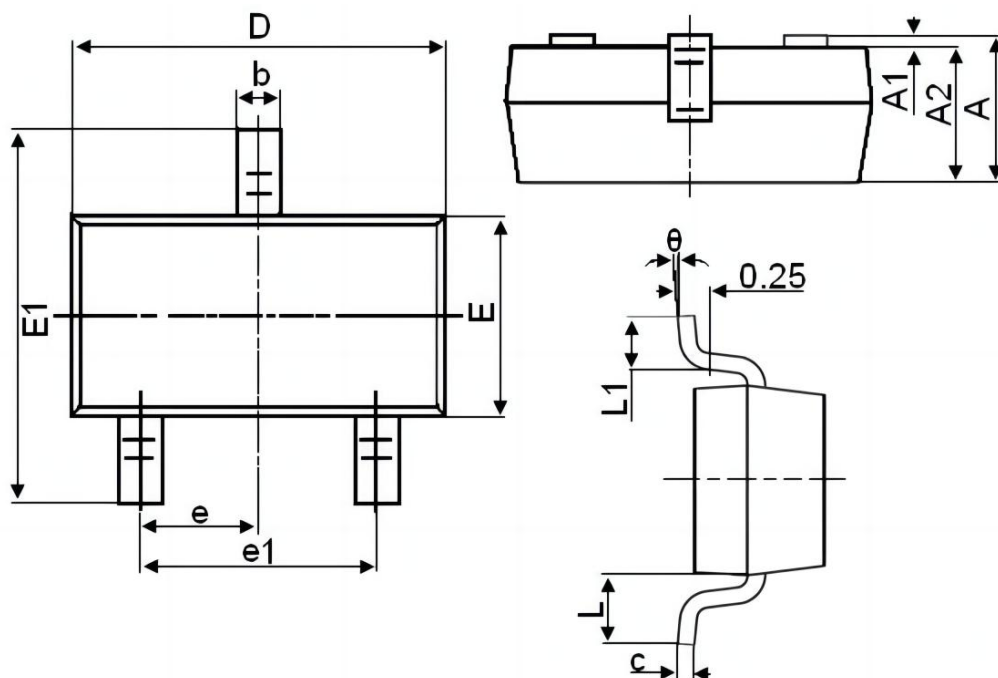

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
C	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP.		0.037 TYP.	
e1	1.800	2.000	0.071	0.079
L	0.550 REF.		0.022 REF.	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°