


### Features

- Rating to 1000V PRV
- Ideal for printed circuit board
- Low forward voltage drop, high current capability
- Reliable low cost construction utilizing molded plastic technique results in inexpensive product
- Glass passivated chip junction.
- Lead-free parts meet RoHS requirements.
- Suffix "-H" indicates Halogen free parts, ex. GBJ2510-H.

### Mechanical data

- Epoxy: UL94-V0 rated flame retardant
- Case : Molded plastic, GBJ
- Terminals : Solder plated, solderable per MIL-STD-750, Method 2026
- Polarity : marked on body
- Mounting Position : Any

### Package outline

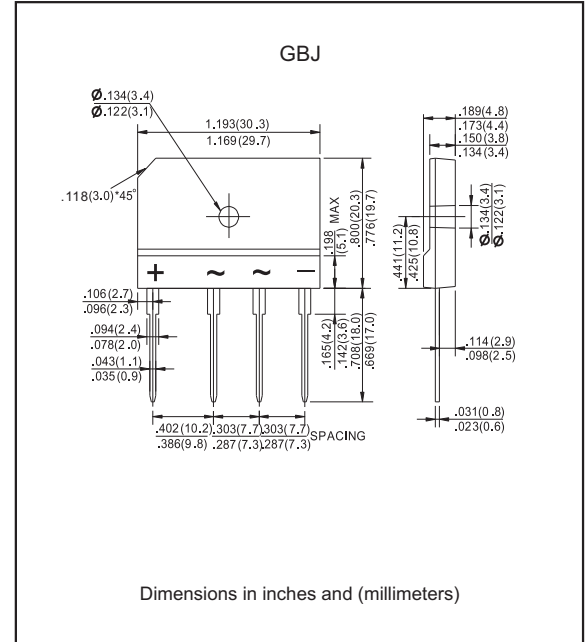

### Maximum ratings and Electrical Characteristics (AT $T_A=25^\circ\text{C}$ unless otherwise noted)

| PARAMETER                                 | CONDITIONS  | SYMBOL          | MIN. | TYP. | MAX. | UNIT                      |
|---|---|-----------------|------|------|------|---------------------------|
| Maximum average forward rectified current | with heatsink Note 1                                      | $I_{F(AV)}$     |      |      | 25.0 | A                         |
| Forward surge current                     | 8.3ms single half sine-wave (JEDEC methode)               | $I_{FSM}$       |      |      | 300  | A                         |
| Reverse current                           | $V_R = V_{RRM} \quad T_J = 25^\circ\text{C}$              | $I_R$           |      |      | 5.0  | $\mu\text{A}$             |
|   | $V_R = V_{RRM} \quad T_J = 125^\circ\text{C}$             |                 |      |      | 500  |                           |
| Rating for fusing                         | $t < 8.3 \text{ ms}$                                      | $I^2t$          |      |      | 510  | $\text{A}^2\text{s}$      |
| Typical Junction capacitance Per Element  | Measured at 1.0MHz and applied reverse voltage of 4.0V DC | $C_J$           |      | 85   |      | pF                        |
| Typical thermal resistance                | Junction to case  | $R_{\theta JC}$ |      | 0.6  |      | $^\circ\text{C}/\text{W}$ |
| Storage temperature                       |   | $T_{STG}$       | -65  |      | +175 | $^\circ\text{C}$          |

Note: 1. Device mounted on 300mm\*300mm\*1.6mm Cu plate heatsink.

| SYMBOLS  | $V_{RRM}^{*1}$<br>(V) | $V_{RMS}^{*2}$<br>(V) | $V_R^{*3}$<br>(V) | $V_F^{*4}$<br>(V) | Operating temperature<br>$T_J, (^\circ\text{C})$ |
|----------|-----------------------|-----------------------|-------------------|-------------------|--|
| GBJ25005 | 50                    | 35                    | 50                | 1.0               | -55 to +150                                      |
| GBJ2501  | 100                   | 70                    | 100               |                   |  |
| GBJ2502  | 200                   | 140                   | 200               |                   |  |
| GBJ2504  | 400                   | 280                   | 400               |                   |  |
| GBJ2506  | 600                   | 420                   | 600               |                   |  |
| GBJ2508  | 800                   | 560                   | 800               |                   |  |
| GBJ2510  | 1000                  | 700                   | 1000              |                   |  |

\*1 Repetitive peak reverse voltage

\*2 RMS voltage

\*3 Continuous reverse voltage

\*4 Maximum forward voltage@ $I_F=12.5\text{A}$

## Rating and characteristic curves

FIG.1-FORWARD CURRENT DERATING CURVE

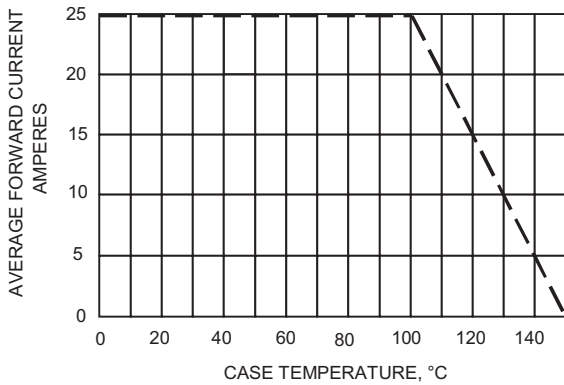


FIG.2-MAXMUN NON-REPETITIVE SURGE CURRENT

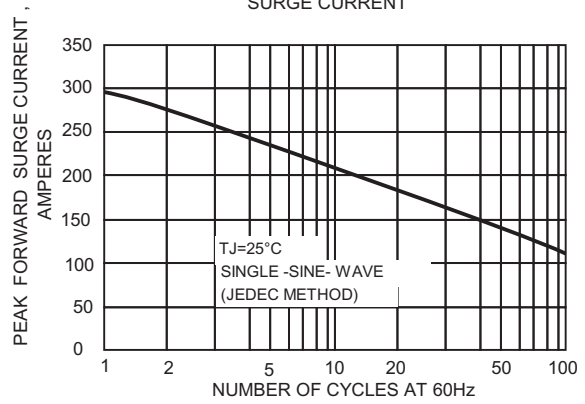


FIG.3-TYPICAL JUNCTION CAPACITANCE

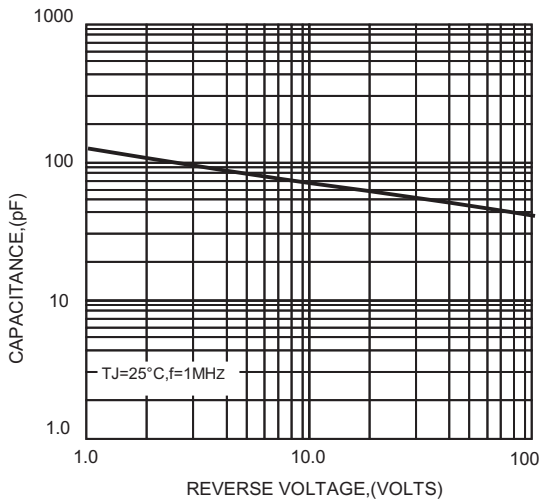


FIG.4-TYPICAL FORWARD CHARACTERISTICS




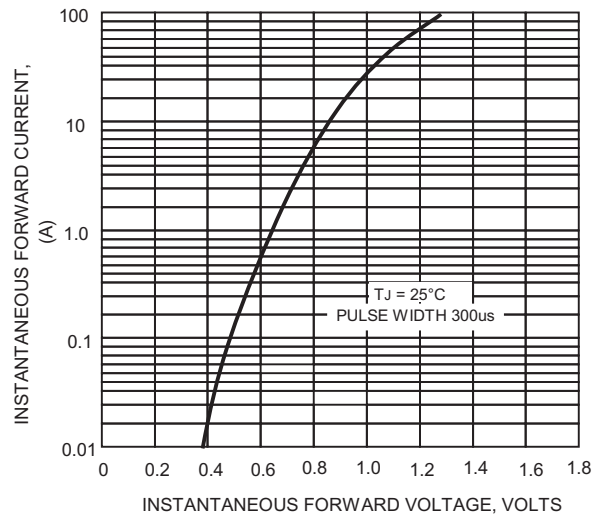


FIG.5-TYPICAL REVERSE CHARACTERISTICS

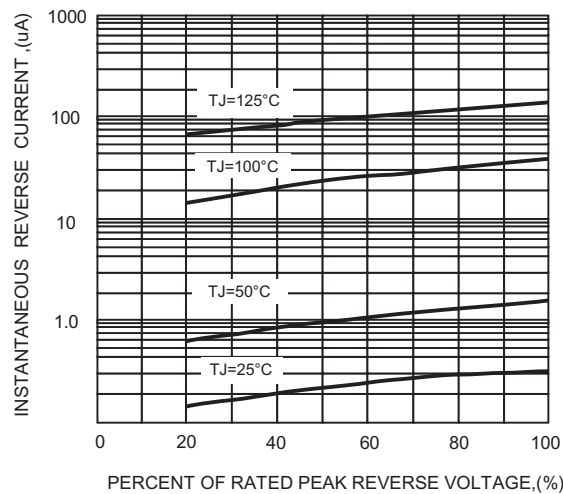

### Pinning information

| Simplified outline  | Symbol  |
|---|---|
|  |  |

### Marking

| Type number | Marking code |
|-------------|--------------|
| GBJ25005    | GBJ25005     |
| GBJ2501     | GBJ2501      |
| GBJ2502     | GBJ2502      |
| GBJ2504     | GBJ2504      |
| GBJ2506     | GBJ2506      |
| GBJ2508     | GBJ2508      |
| GBJ2510     | GBJ2510      |