

Features

- This series is designed for average power 350W approximated ESD protection, different V_{RWM} , different peak pulse power available
- Bi-directional configuration
- Working voltages: 3.0V, 5.0V, 8.0V, 12V, 15V, 24V
- Protects one I/O line
- Low clamping voltage
- Low leakage current
- Lead-free parts meet RoHS requirements
- Compliant to Halogen-free


IEC compatibility

- IEC61000-4-2 (ESD) $\pm 15kV$ (air), $\pm 8kV$ (contact)
- IEC61000-4-4 (EFT) 40A (5/50ns)

Applications

- Cell phone handsets and accessories
- Microprocessor based equipment
- Personal digital assistants (PDA's)
- Notebooks, desktops, and servers
- Portable instrumentation
- Peripherals
- USB interface

Package outline

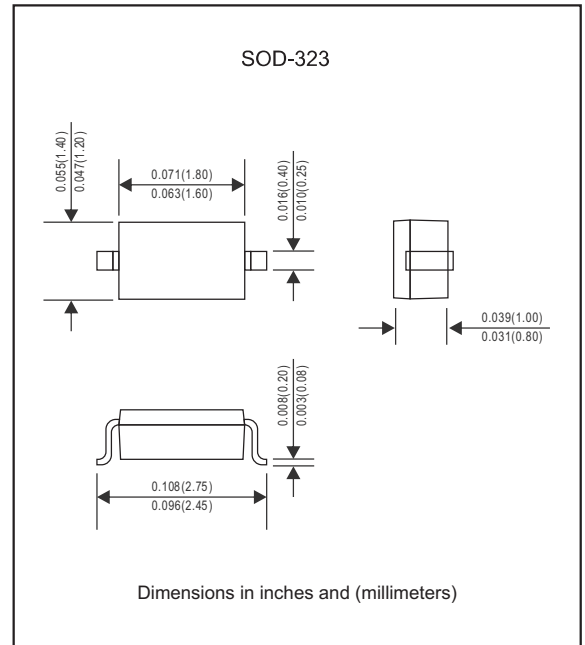

Mechanical data

- Epoxy : UL94-V0 rated flame retardant
- Case : Molded plastic, SOD-323
- Terminals : Plated terminals, solderable per MIL-STD-750, Method 2026
- Mounting Position : Any

Maximum ratings (at $T_A=25^\circ C$ unless otherwise noted)


Parameter	Symbol	Value	Unit
Lead soldering temperature	T_L	260 (10 sec.)	$^\circ C$
Operating junction temperature range	T_J	-55 to +125	$^\circ C$
Storage temperature range	T_{STG}	-55 to +150	$^\circ C$

Electrical characteristics (at $T_A=25^\circ C$ unless otherwise noted)


Part No. (Note 1)	V_{RWM} (V)	$V_{BR}(V)@I_T$	I_T (mA)	$V_C(V)$ @ $I_{PP}=1.0A$	I_{PP} (A)	$V_C(V)$ @ I_{PP}	$I_R(\mu A)$ leakage current@ V_{RWM}	$C_J(pF)$ (Note 2)
	Max.	Min.		Max.		Max.	Max.	Typ.
GBLC03C	3.0	3.6	1.0	7.0	8	13.9	2	0.8
GBLC05C	5.0	6.0	1.0	9.8	8	20.0	1	0.8
GBLC08C	8.0	8.5	1.0	13.5	8	23.0	1	0.8
GBLC12C	12.0	13.3	1.0	21.0	6	30.0	1	0.8
GBLC15C	15.0	16.7	1.0	25.0	5	40.0	1	0.8
GBLC24C	24.0	26.7	1.0	43.0	3	56.0	1	0.8

Notes 1: Part numbers with an additional "C" suffix are bi-directional devices, i.e., GBLC03C
 2: Off-state capacitance 1MHz, zero dc bias.


Rating and characteristic curves

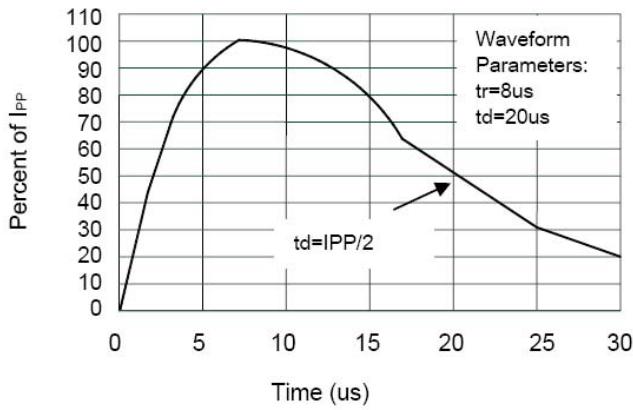


Pulse Waveform

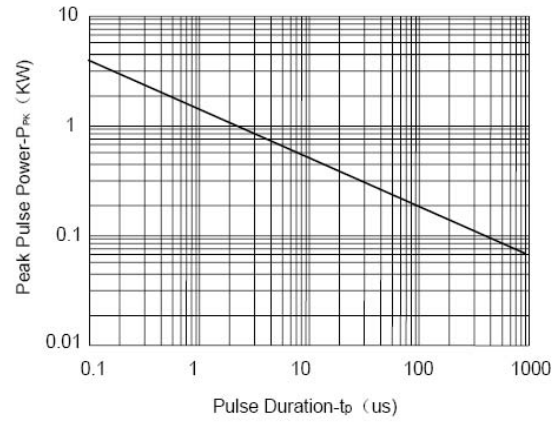

Non-Repetitive Peak Pulse Power vs. Pulse Time

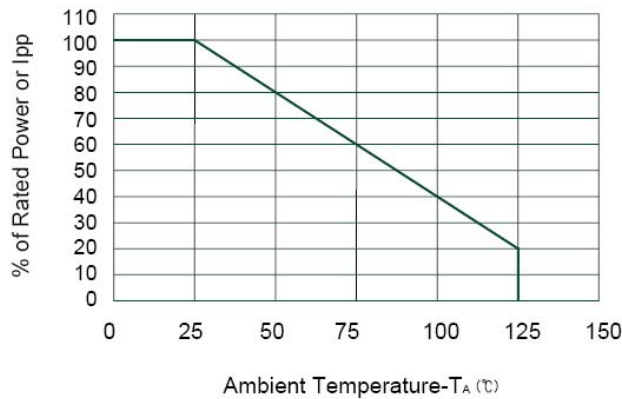



Power Derating Curve

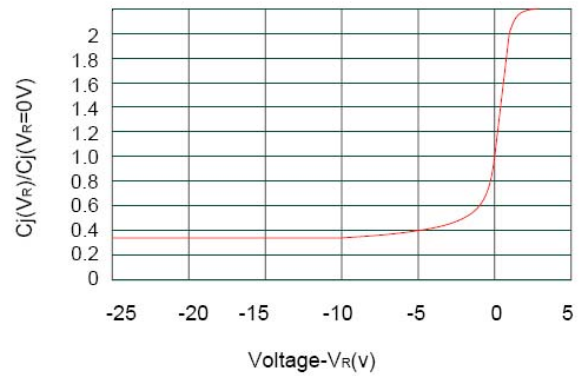

Junction Capacitance vs. Reverse Voltage

Pinning information

Pin	Simplified outline	Symbol
Bi-Directional		

Marking

Type number	Marking code
GBLC03C	CC/CA1
GBLC05C	AC/5BLC
GBLC08C	BC/8BLC
GBLC12C	AB/ABLC
GBLC15C	EC/BBLC
GBLC24C	HC/CBLC