


FEATURES

- Rating to 1000V PRV
- High efficiency
- Glass passivated chip junction
- Electrically isolated metal case for maximum heat dissipation

MECHANICAL DATA

- Case : Molded plastic with Heatsink internally mounted in the bridge encapsulation
- Polarity : As marked on Body
- Mounting : Hole for # 10 screw

Package outline

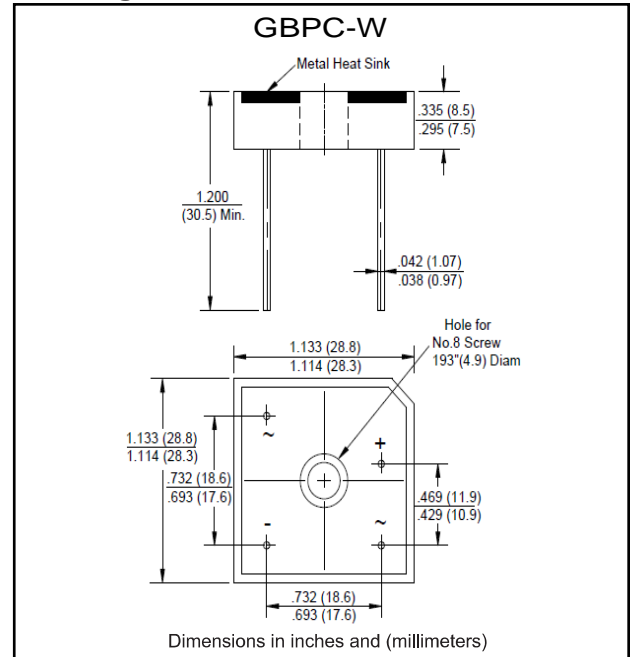

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%

CHARACTERISTICS	SYMBOL	GBPC 25005W	GBPC 2501W	GBPC 2502W	GBPC 2504W	GBPC 2506W	GBPC 2508W	GBPC 2510W	UNIT
Maximum Recurrent Peak Reverse Voltage	VRRM	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	VRMS	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	VDC	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current @Tc = Ta	I(AV)	25.0							A
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load	IFSM	350							A
Maximum forward Voltage at 12.5A DC	VF	1.0							V
Maximum DC Reverse Current at Rated DC Blocking Voltage @Tj =25°C @Tj =125°C	IR	5.0 500							uA
I ² t Rating for fusing (t < 8.3ms), (Note 1)	I ² t	508							A ² S
Typical Thermal Resistance (Note 2)	RθJC	5.0							°C/W
Operating Temperature Range	TJ	-55 to +150							°C
Storage Temperature Range	TSTG	-55 to +150							°C

NOTES : 1.Measured at non-repetitive, for greater than 1ms and less than 8.3ms

2.Device mounted on 300mm x 300mm x 1.6mm Cu Plate Heatsink.

Characteristics(Typical)

Fig. 1 - Forward Current Derating Curve

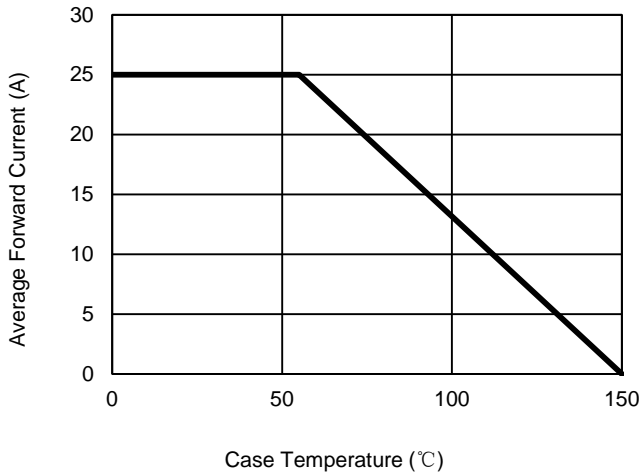


Fig. 2 - Maximum Non-Repetitive Surge Current

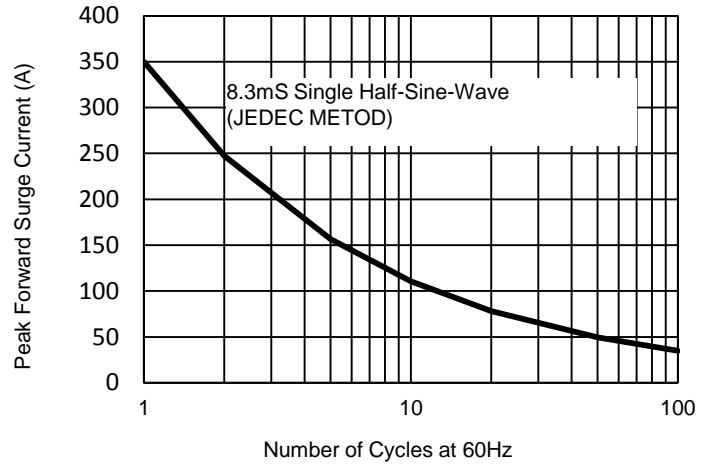


Fig. 3 - Typical Reverse Characteristics




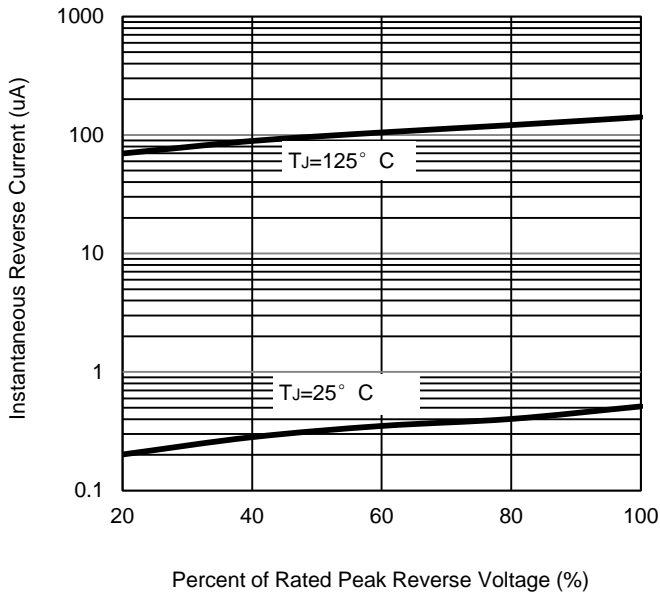


Fig. 4 - Typical Forward Characteristics

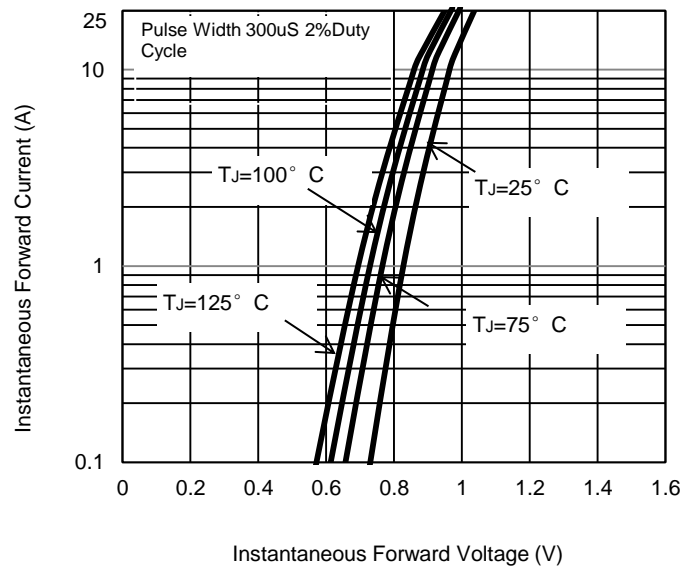

Pinning information

Simplified outline	Symbol
	

Marking

Type number	Marking code
GBPC25005W	GBPC25005W
GBPC2501W	GBPC2501W
GBPC2502W	GBPC2502W
GBPC2504W	GBPC2504W
GBPC2506W	GBPC2506W
GBPC2508W	GBPC2508W
GBPC2510W	GBPC2510W