

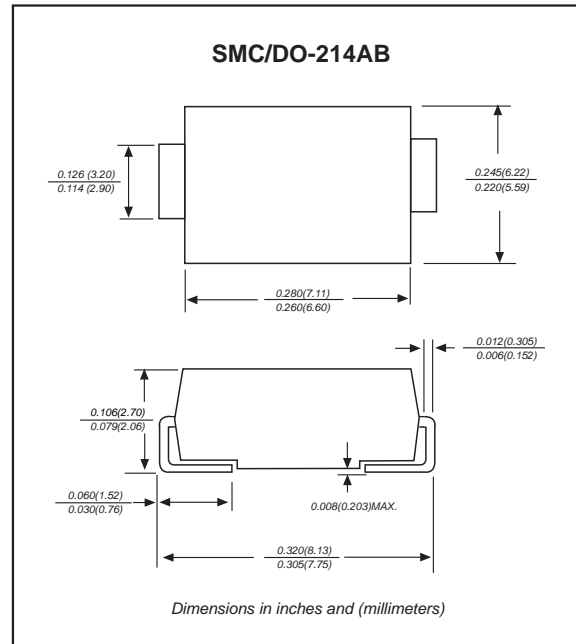
Features

- ▶ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ▶ For surface mounted applications
- ▶ Metal silicon junction, majority carrier conduction
- ▶ Low power loss, high efficiency
- ▶ Built-in strain relief, ideal for automated placement
- ▶ High forward surge current capability
- ▶ High temperature soldering guaranteed: 250°C/10 seconds at terminals
- ▶ Compliant to RoHS Directive 2011/65/EU
- ▶ Compliant to Halogen-free

Mechanical data

- ▶ **Case:** JEDEC DO-214AB molded plastic body
- ▶ **Terminals:** Solder plated, solderable per MIL-STD-750, Method 2026
- ▶ **Polarity:** Color band denotes cathode end
- ▶ **Mounting Position:** Any

Package outline



Maximum ratings and Electrical Characteristics (AT $T_A=25^\circ\text{C}$ unless otherwise noted)

PARAMETER	CONDITIONS		Symbol	MIN.	TYP.	MAX.	UNIT
Forward rectified current	See Fig.1		I_O			10.0	A
Forward surge current	8.3ms single half sine-wave (JEDEC methode)		I_{FSM}			200	A
Reverse current	$T_A = 25^\circ\text{C}$	$V_R = 20\text{V} - 60\text{V}$	I_R			0.5	mA
		$V_R = 80\text{V} - 200\text{V}$				0.1	
Reverse current	$T_A = 100^\circ\text{C}$	$V_R = 20\text{V} - 60\text{V}$	I_R			10	mA
		$V_R = 80\text{V} - 200\text{V}$				5	
Thermal resistance (1)	Junction to Ambient		$R_{\theta JA}$		64		$^\circ\text{C/W}$
	Junction to Case		$R_{\theta JC}$		36		
	Junction to Lead		$R_{\theta JL}$		20		
Diode junction capacitance	f=1MHz and applied 4V DC reverse voltage		C_j		550		pF
Storage temperature			T_{STG}	-65		+150	$^\circ\text{C}$

Note: (1) Device mounted on p.c.b. with 10 mm x 20 mm x 0.1 mm copper pad area.

SYMBOLS	V_{RRM}^{*1} (V)	V_{RMS}^{*2} (V)	V_R^{*3} (V)	V_F^{*4} (V)	Operating temperature T_J ($^\circ\text{C}$)
SS1020-C	20	14	20	0.55	
SS1030-C	30	21	30		
SS1040-C	40	28	40		
SS1045-C	45	32	45		
SS1060-C	60	42	60	0.75	
SS1080-C	80	56	80	0.85	
SS10A0-C	100	70	100		
SS1015-C	150	105	150		
SS10B0-C	200	140	200		0.90

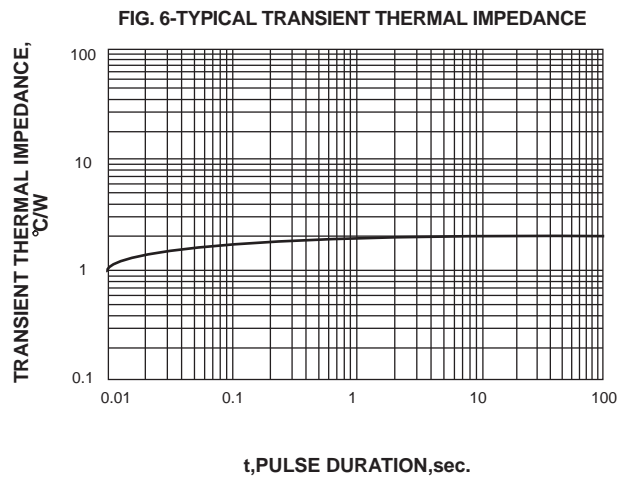
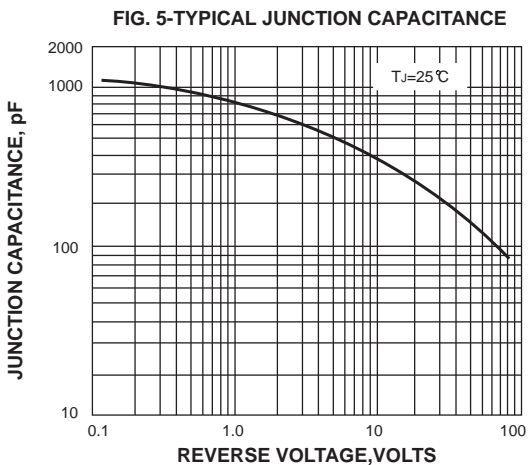
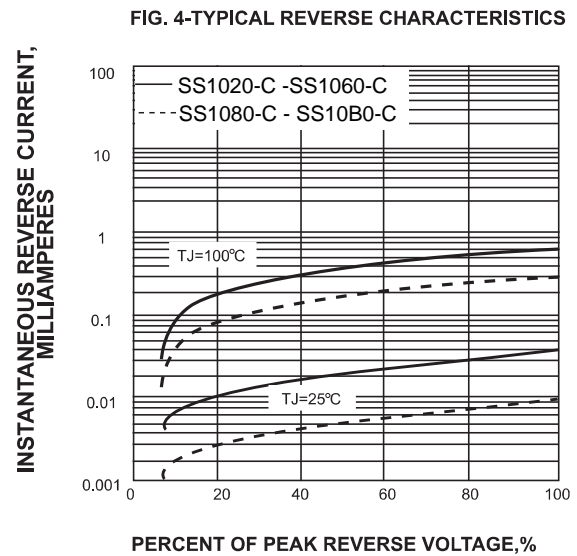
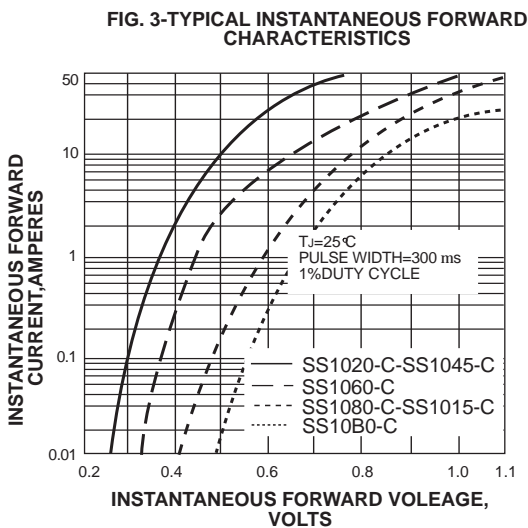
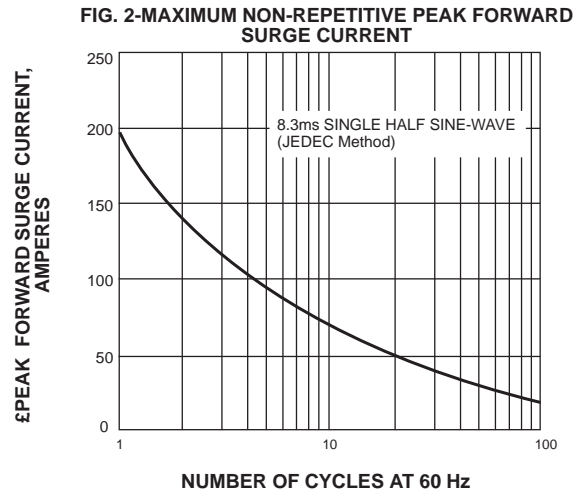
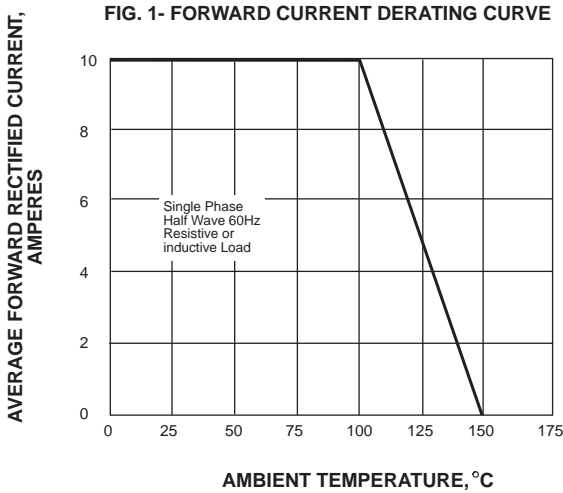
*1 Repetitive peak reverse voltage

*2 RMS voltage



*3 Continuous reverse voltage

*4 Maximum forward voltage@ $I_F=10.0\text{A}$

Rating and characteristic curves




Pinning information

Pin	Simplified outline	Symbol
Pin1 cathode Pin2 anode		

Marking

Type number	Marking code
SS1020-C	SS1020
SS1030-C	SS1030
SS1040-C	SS1040
SS1045-C	SS1045
SS1060-C	SS1060
SS1080-C	SS1080
SS10A0-C	SS10A0
SS1015-C	SS1015
SS10B0-C	SS10B0

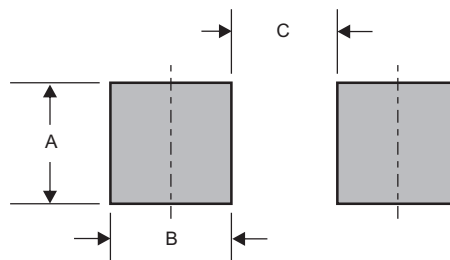Suggested solder pad layout



Dimensions in inches and (millimeters)

PACKAGE	A	B	C
SMC	0.132 (3.30)	0.100 (2.50)	0.176(4.40)