


### Features

- ▶ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ▶ For surface mounted applications
- ▶ Low reverse leakage
- ▶ Built-in strain relief, ideal for automated placement
- ▶ High forward surge current capability
- ▶ High temperature soldering guaranteed: 250°C/10 seconds at terminals
- ▶ Glass passivated chip junction
- ▶ Compliant to RoHS Directive 2011/65/EU
- ▶ Compliant to Halogen-free

### Mechanical data

- ▶ **Case:** JEDEC SMBF molded plastic body
- ▶ **Terminals:** Solder plated, solderable per MIL-STD-750, Method 2026
- ▶ **Polarity:** Color band denotes cathode end
- ▶ **Mounting Position:** Any

### Package outline

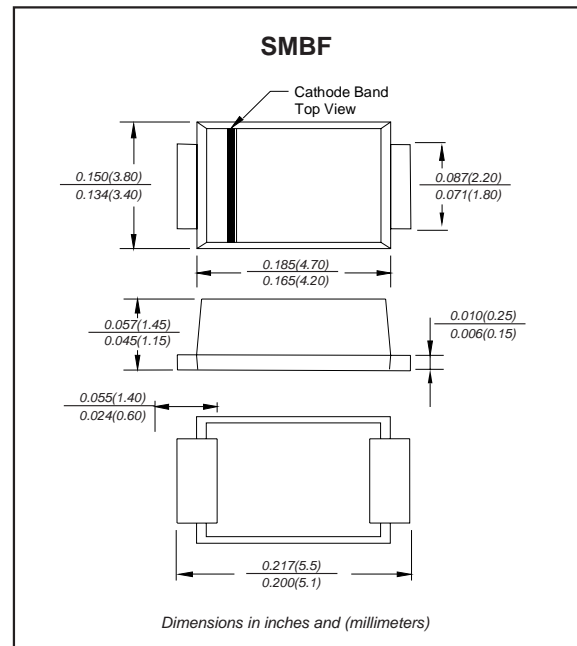

### Maximum ratings and Electrical Characteristics (AT $T_A=25^\circ\text{C}$ unless otherwise noted)

PARAMETER	CONDITIONS	Symbol	MIN.	TYP.	MAX.	UNIT
Forward rectified current	See Fig.1	$I_O$			2.0	A
Forward surge current	8.3ms single half sine-wave (JEDEC method)	$I_{FSM}$			60	A
Reverse current	$V_R = V_{RRM}$ $T_A = 25^\circ\text{C}$	$I_R$			5.0	$\mu\text{A}$
	$V_R = V_{RRM}$ $T_A = 100^\circ\text{C}$				50	
Thermal resistance	Junction to ambient NOTE 1	$R_{\theta JA}$		60		$^\circ\text{C}/\text{W}$
Diode junction capacitance	f=1MHz and applied 4V DC reverse voltage	$C_J$		25		pF
Storage temperature		$T_{STG}$	-65		+150	$^\circ\text{C}$

**Note:** 1.P.C.B. mounted with 0.2x0.2" (5.0x5.0mm) copper pad areas

SYMBOLS	$V_{RRM}^{*1}$ (V)	$V_{RMS}^{*2}$ (V)	$V_R^{*3}$ (V)	$V_F^{*4}$ (V)	Operating temperature $T_{J,}$ ( $^\circ\text{C}$ )
S2A-BF	50	35	50	1.10	-55 to +150
S2B-BF	100	70	100		
S2D-BF	200	140	200		
S2G-BF	400	280	400		
S2J-BF	600	420	600		
S2K-BF	800	560	800		
S2M-BF	1000	700	1000		







\*1 Repetitive peak reverse voltage

\*2 RMS voltage



\*3 Continuous reverse voltage

\*4 Maximum forward voltage@ $I_F=2.0\text{A}$


### Rating and characteristic curves

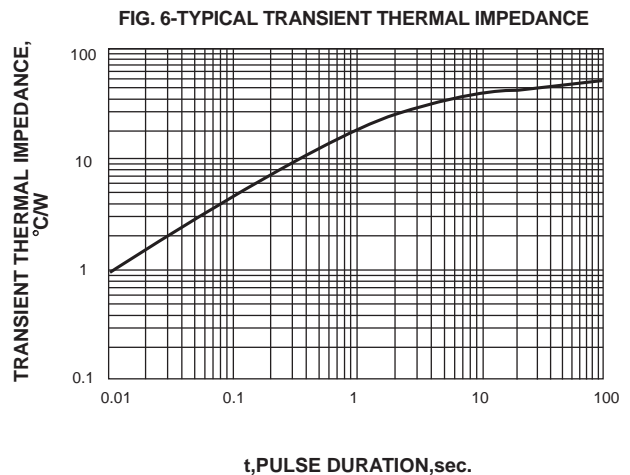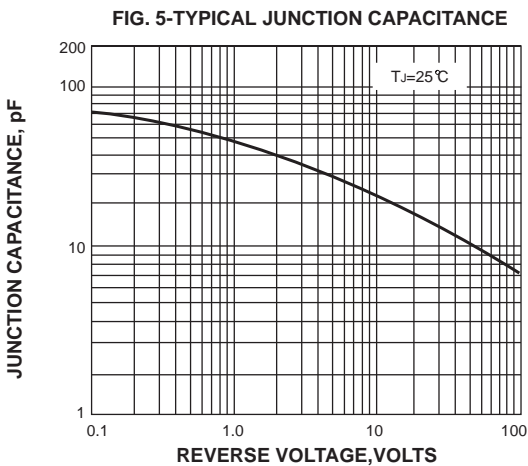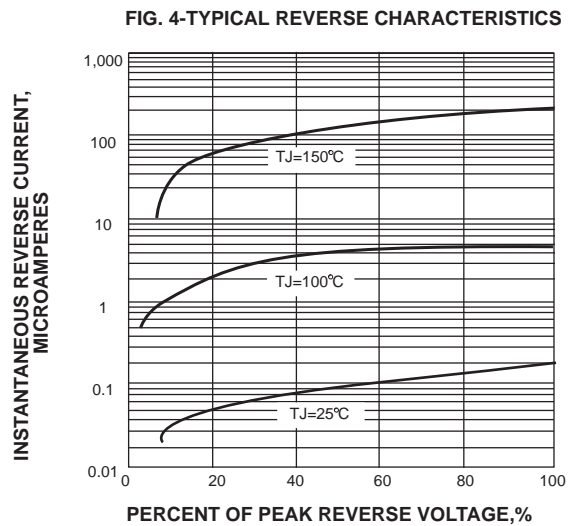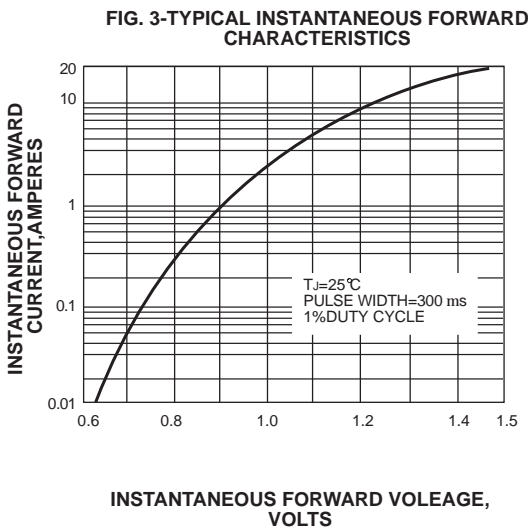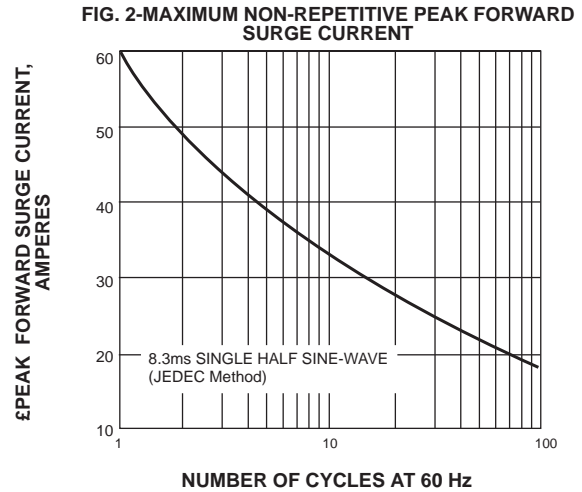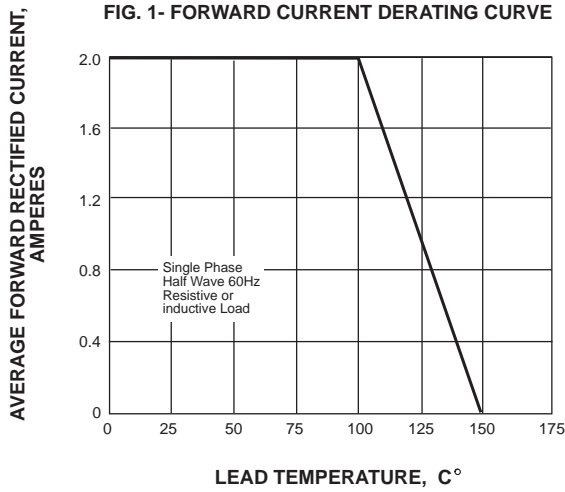


### Pinning information

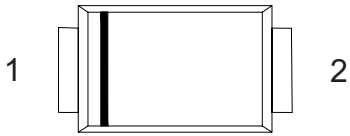Pin	Simplified outline	Symbol
Pin1 cathode Pin2 anode		

### Marking

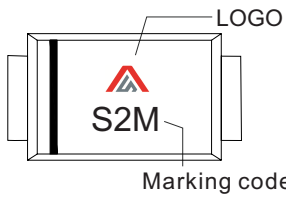Type number	Marking code	Example
S2A-BF	S2A	
S2B-BF	S2B	
S2D-BF	S2D	
S2G-BF	S2G	
S2J-BF	S2J	
S2K-BF	S2K	
S2M-BF	S2M	

### Suggested solder pad layout

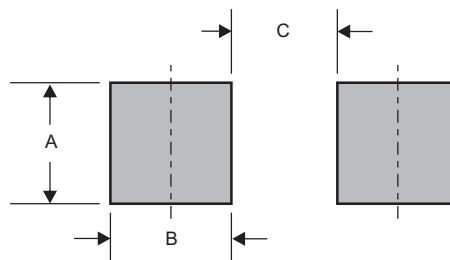

Dimensions in inches and (millimeters)

PACKAGE	A	B	C
SMBF	0.098 (2.50)	0.071 (1.80)	0.118 (3.00)