


Features

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ For surface mounted applications
- ◆ Metal silicon junction, majority carrier conduction
- ◆ Low power loss, high efficiency
- ◆ Built-in strain relief, ideal for automated placement
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed: 250°C/10 seconds at terminals
- ◆ Compliant to RoHS Directive 2011/65/EU
- ◆ Compliant to Halogen-free

Mechanical data

- ◆ **Case:** JEDEC DO-214AC molded plastic body
- ◆ **Terminals:** Solder plated, solderable per MIL-STD-750, Method 2026
- ◆ **Polarity:** Color band denotes cathode end
- ◆ **Mounting Position:** Any

Package outline

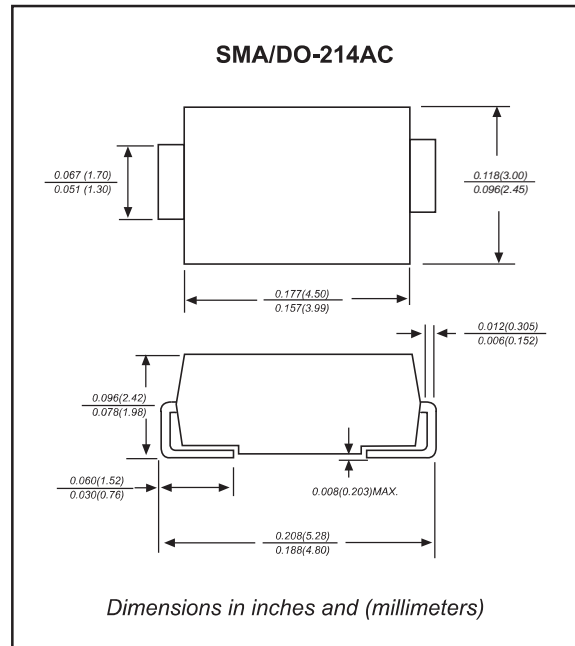

Maximum ratings and Electrical Characteristics (AT $T_A=25^\circ\text{C}$ unless otherwise noted)

PARAMETER	CONDITIONS	Symbol	MIN.	TYP.	MAX.	UNIT
Forward rectified current	See Fig.2	I_O			2.0	A
Forward surge current	8.3ms single half sine-wave (JEDEC method)	I_{FSM}			50	A
Reverse current	$V_R = V_{RRM}$ $T_A = 25^\circ\text{C}$	I_R			1.0	mA
	$V_R = V_{RRM}$ $T_A = 100^\circ\text{C}$				20	
Thermal resistance (1)	Junction to Ambient	$R_{\theta JA}$		70		$^\circ\text{C/W}$
	Junction to Case	$R_{\theta JC}$		25		
	Junction to Lead	$R_{\theta JL}$		30		
Diode junction capacitance	f=1MHz and applied 4V DC reverse voltage	C_J		220		pF
Storage temperature		T_{STG}	-65		+150	$^\circ\text{C}$

Note: (1) Device mounted on p.c.b. with 10 mm x 20 mm x 0.1 mm copper pad area.

SYMBOLS	V_{RRM}^{*1} (V)	V_{RMS}^{*2} (V)	V_R^{*3} (V)	V_F^{*4} (V)	Operating temperature T_J , ($^\circ\text{C}$)
SL22-A	20	14	20	0.45	-55 to +125
SL23-A	30	21	30		
SL24-A	40	28	40		
SL25-A	50	35	50	0.55	-55 to +150
SL26-A	60	42	60		
SL28-A	80	56	80	0.75	
SL210-A	100	70	100		
SL215-A	150	105	150	0.85	
SL220-A	200	140	200		

*1 Repetitive peak reverse voltage

*2 RMS voltage


*3 Continuous reverse voltage

*4 Maximum forward voltage@ $I_F=2.0\text{A}$

Rating and characteristic curves


AVERAGE FORWARD RECTIFIED CURRENT, AMPERES

FIG. 1- FORWARD CURRENT DERATING CURVE

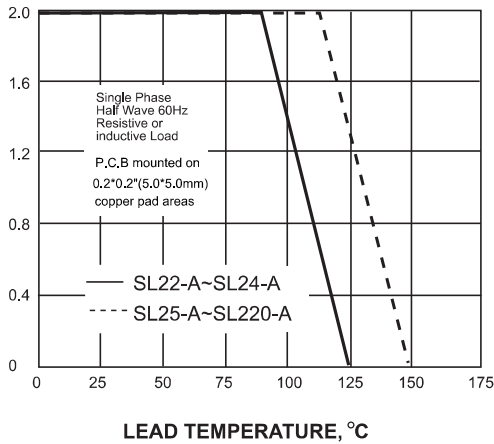


PEAK FORWARD SURGE CURRENT, AMPERES

FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

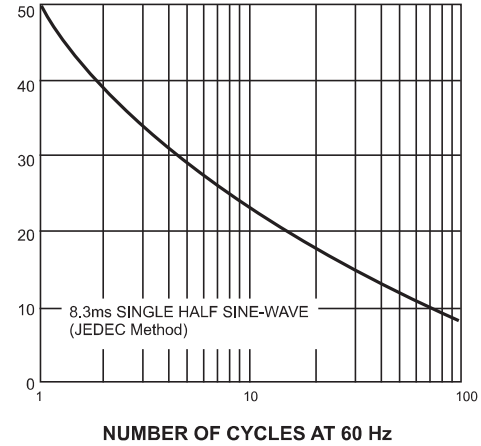


INSTANTANEOUS FORWARD CURRENT, AMPERES

FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

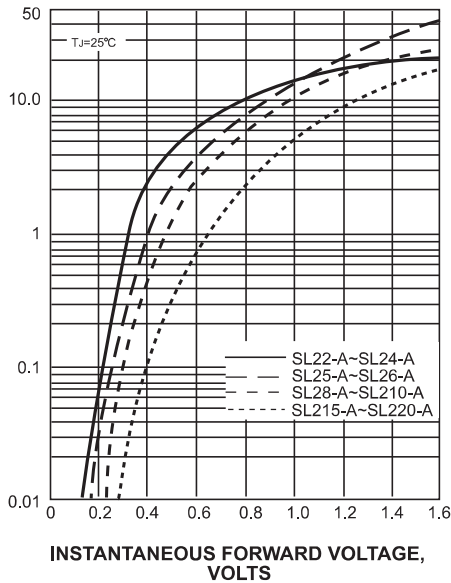


INSTANTANEOUS REVERSE CURRENT, MILLIAMPERES

FIG. 4-TYPICAL REVERSE CHARACTERISTICS

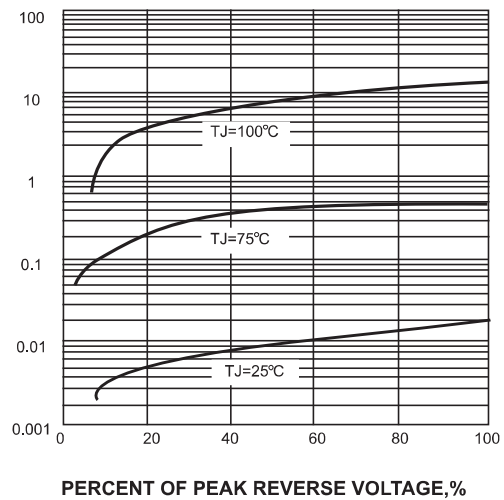


JUNCTION CAPACITANCE, pF

FIG. 5-TYPICAL JUNCTION CAPACITANCE

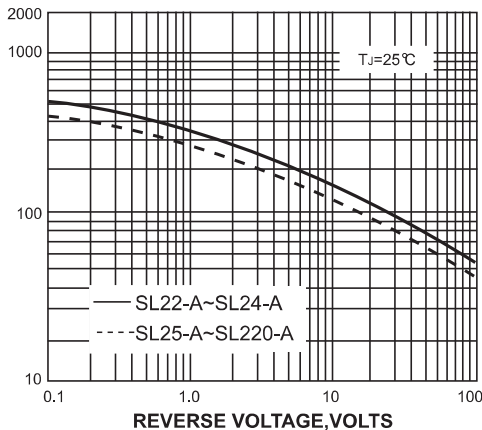



TRANSIENT THERMAL IMPEDANCE, °C/W

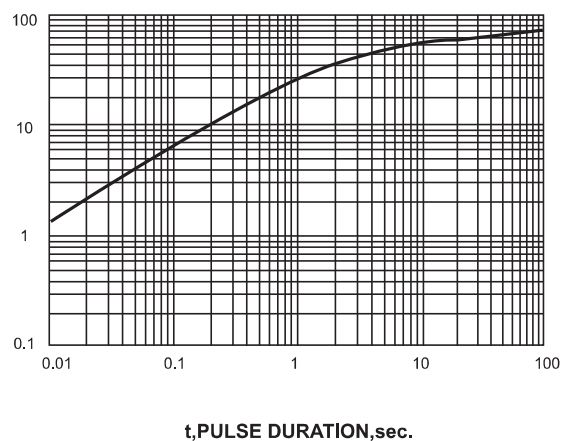
FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE




Pinning information

Pin	Simplified outline	Symbol
Pin1 cathode Pin2 anode		

Marking

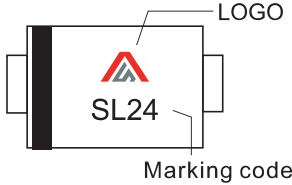Type number	Marking code	Example
SL22-A	SL22	
SL23-A	SL23	
SL24-A	SL24	
SL25-A	SL25	
SL26-A	SL26	
SL28-A	SL28	
SL210-A	SL210	
SL215-A	SL215	
SL220-A	SL220	

Suggested solder pad layout

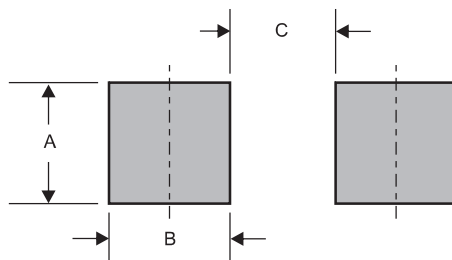

Dimensions in inches and (millimeters)

PACKAGE	A	B	C
SMA	0.110 (2.80)	0.063 (1.60)	0.087 (2.20)