

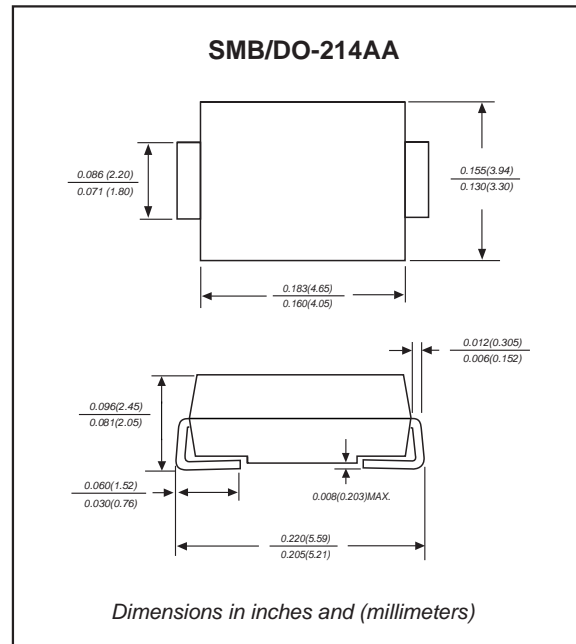
Features

- ▶ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ▶ For surface mounted applications
- ▶ Metal silicon junction, majority carrier conduction
- ▶ Low power loss, high efficiency
- ▶ Built-in strain relief, ideal for automated placement
- ▶ High forward surge current capability
- ▶ High temperature soldering guaranteed: 250°C/10 seconds at terminals
- ▶ Compliant to RoHS Directive 2011/65/EU
- ▶ Compliant to Halogen-free

Mechanical data

- ▶ **Case:** JEDEC DO-214AA molded plastic body
- ▶ **Terminals:** Solder plated, solderable per MIL-STD-750, Method 2026
- ▶ **Polarity:** Color band denotes cathode end
- ▶ **Mounting Position:** Any

Package outline



Maximum ratings and Electrical Characteristics (AT $T_A=25^\circ\text{C}$ unless otherwise noted)







PARAMETER	CONDITIONS	Symbol	MIN.	TYP.	MAX.	UNIT
Forward rectified current	See Fig.1	I_O			10.0	A
Forward surge current	8.3ms single half sine-wave (JEDEC methode)	I_{FSM}			200	A
Reverse current	$T_A = 25^\circ\text{C}$	$V_R = 20\text{V} - 60\text{V}$			0.5	mA
		$V_R = 80\text{V} - 200\text{V}$			0.1	
Reverse current	$T_A = 100^\circ\text{C}$	$V_R = 20\text{V} - 60\text{V}$			10	mA
		$V_R = 80\text{V} - 200\text{V}$			5	
Thermal resistance (1)	Junction to Ambient	$R_{\theta JA}$		60		$^\circ\text{C/W}$
	Junction to Case	$R_{\theta JC}$		23		
	Junction to Lead	$R_{\theta JL}$		25		
Diode junction capacitance	f=1MHz and applied 4V DC reverse voltage	C_J		550		pF
Storage temperature		T_{STG}	-65		+150	$^\circ\text{C}$

Note: (1) Device mounted on p.c.b. with 10 mm x 20 mm x 0.1 mm copper pad area.



SYMBOLS	V_{RRM}^{*1} (V)	V_{RMS}^{*2} (V)	V_R^{*3} (V)	V_F^{*4} (V)	Operating temperature T_J , ($^\circ\text{C}$)
SS1020-B	20	14	20	0.55	
SS1030-B	30	21	30		
SS1040-B	40	28	40		
SS1045-B	45	32	45		
SS1060-B	60	42	60	0.75	
SS1080-B	80	56	80	0.85	
SS10A0-B	100	70	100		
SS1015-B	150	105	150		
SS10B0-B	200	140	200		

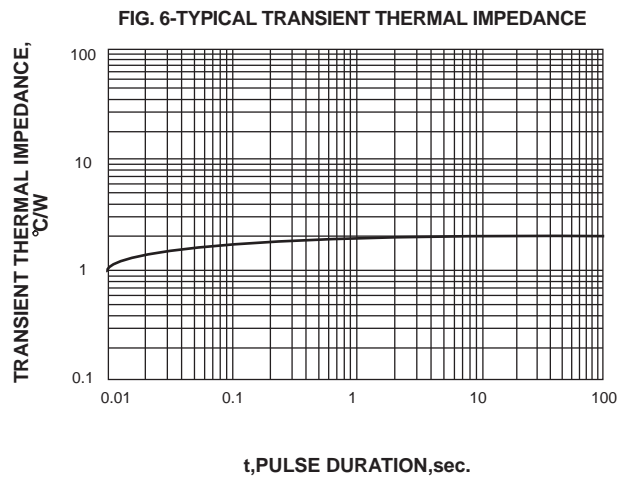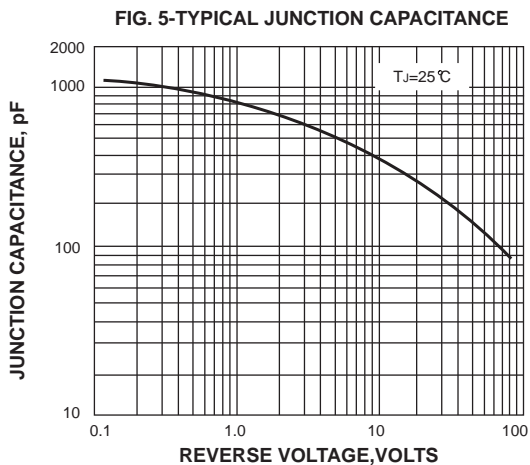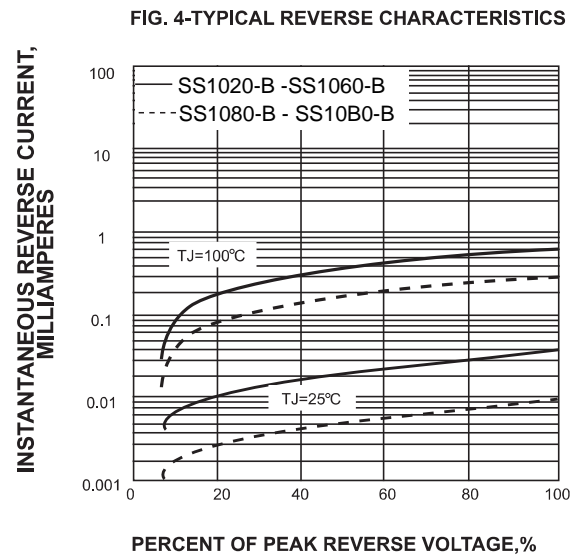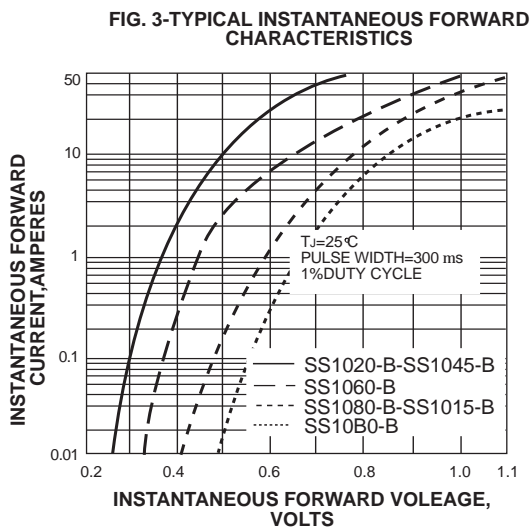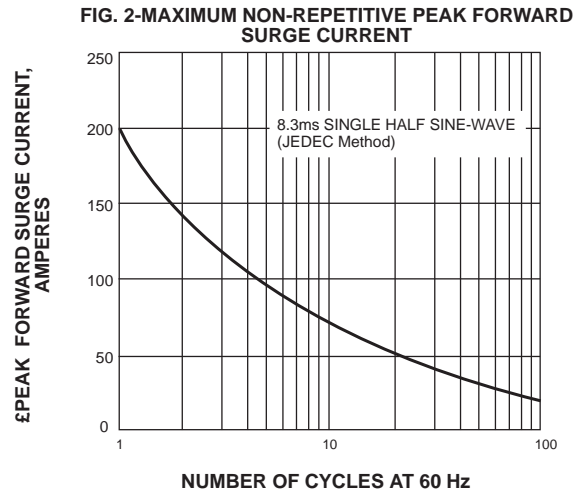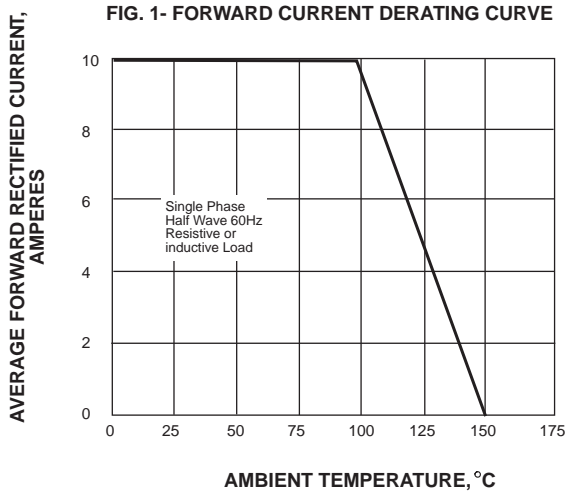- *1 Repetitive peak reverse voltage
- *2 RMS voltage
- *3 Continuous reverse voltage
- *4 Maximum forward voltage@ $I_F=10.0\text{A}$

Rating and characteristic curves




Pinning information

Pin	Simplified outline	Symbol
Pin1 cathode Pin2 anode		

Marking

Type number	Marking code
SS1020-B	SS1020
SS1030-B	SS1030
SS1040-B	SS1040
SS1045-B	SS1045
SS1060-B	SS1060
SS1080-B	SS1080
SS10A0-B	SS10A0
SS1015-B	SS1015
SS10B0-B	SS10B0

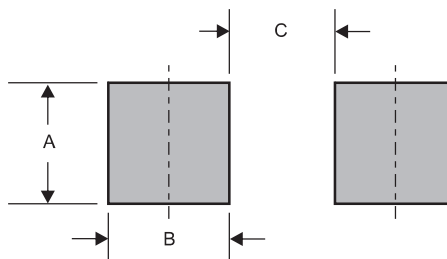Suggested solder pad layout



Dimensions in inches and (millimeters)

PACKAGE	A	B	C
SMB	0.090(2.30)	0.098(2.50)	0.070(1.80)